

Final  
Drainage Report  
For  
Tract No. 20547  
Victorville, CA

Prepared  
January 2025

United Engineering Group - California  
10601 Church Street  
Suite 124  
Rancho Cucamonga, CA 91730

Tel: (909) 466-9240

Provided for:

CJC Holdings. LLC  
17260 Bear Valley Road  
Suite 110  
Victorville, CA 92395

Project # 30212

This report has been prepared by or under the direction of the following registered civil engineer who attests to the technical information contained herein. The registered civil engineer has also judged the qualifications of any employees that have provided data and calculations upon which the recommendations, conclusions, and decisions are based.



Christopher F. Lenz, PE 63001

TABLE OF CONTENTS

<b><u>DESCRIPTION</u></b>	<b><u>PAGE</u></b>
1. INTRODUCTION .....	4
2. SITE DISCUSSION .....	5
3. RAINFALL DATA .....	5
4. ONSITE RUNOFF .....	6
5. OFFSITE RUNOFF .....	7
6. STORMWATER TREATMENT .....	7
7. CONCLUSION.....	7

**APPENDICES**


APPENDIX A: PROJECT PRE AND POST CONDITION EXHIBITS

APPENDIX B: PROJECT RATIONAL AND SCS UNIT HYDROGRAPH METHOD  
HYDROLOGY STUDY INFORMATION

APPENDIX C: PROJECT HYDRAULIC CALCULATIONS

# I. INTRODUCTION

Tract 20547 is a residential subdivision of approximately 15 acres into 54 single family residential lots, located near the southeast corner of Luna Road and Mesa View Drive in the City of Victorville. The property is a long rectangle shape and is bordered by the existing development on all sides. Minimum lot size is 7,200 sf. This is a “priority project” as it is a Tract Map, and thus a WQMP is required.

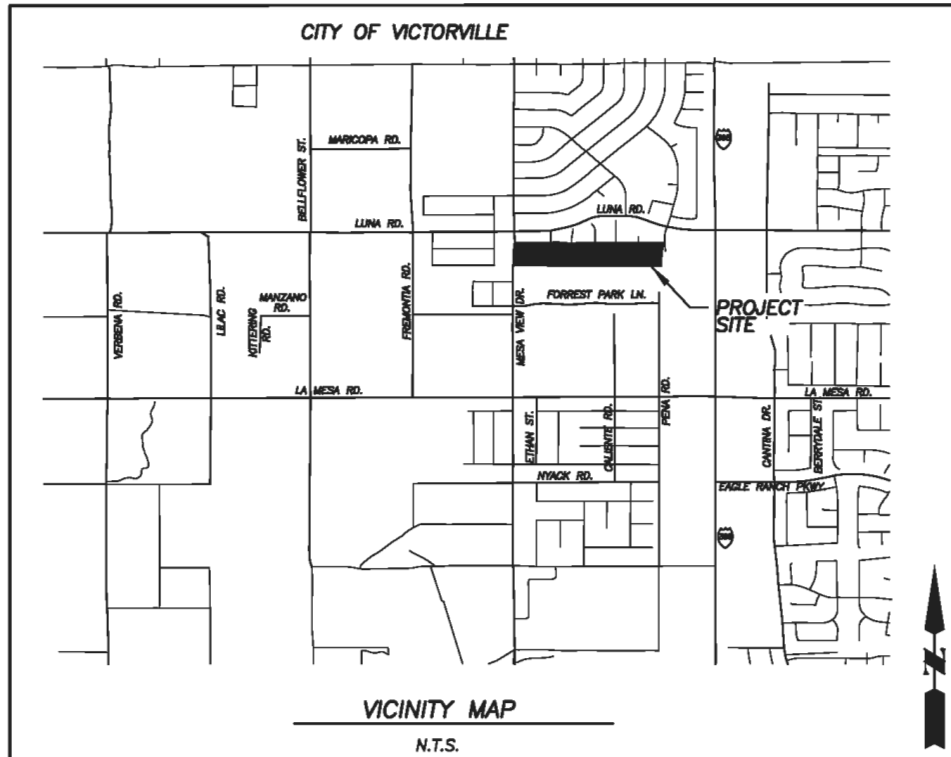

The purpose of this study is to determine the 10-year and 100-year storm runoff emanating from on-site and off-site areas for the Project, and to show how the subdivision handles storm water. The study will determine the peak flow rate for the existing condition, the peak flow rate for the proposed condition, proposed condition flow rate routed through two combination water quality and detention basins. Additional analysis will confirm hydraulic capacity of proposed street sections compared to rational expected runoff.

The scope of the study includes the following:

- Determination of points of flow concentration and watershed areas.
- Determination of the 100-year 24 hours storm runoff based upon the onsite drainage conditions utilizing the San Bernardino County Flood Control District (SBCFCD) SCS Unit Hydrograph Method.
- Determination of the 10-year and 100-year peak flow rates for the offsite area utilizing the San Bernardino County Flood Control District

(SBCFCD) Rational Method.

## II. SITE DISCUSSION

The current property is vacant, undeveloped and undisturbed land with uniform slope of approximately 1.5 percent. The topography indicates that the runoff drains in an easterly direction in the form of sheet flow. There is no evidence of defined washes on site, with the flow concentrating at the northeast corner of the site before discharging northerly in Pena Road. The site is surrounded by development and is not impacted by offsite flows.

## III. RAINFALL DATA

The San Bernardino County Flood Control District (SBCFCD) hydrology Manual, (Reference 1) was used to develop the hydrological parameters for the 10-year and 100-year storm events. The Rational Method was used to determine the peak flow rates associated with the existing project conditions as well as the time of concentration used in the Unit Hydrograph method. In addition, the Unit Hydrograph Method was utilized to determine the runoff volume. Computations were performed using the CivilCADD drainage software for San Bernardino County Developed by CivilDesign Corporation.

Rainfall data was taken from the isohyetal maps from the SBCFCD hydrology Manual.

Return Period - Duration	Isohyetal (in)
10 year - 1 hour	0.69
2 year - 6 hour	0.89
2 year - 24 hour	1.64
100 year - 1 hour	1.29
100 year - 6 hour	2.51
100 year - 24 hour	5.41

Hydrologic Soil Group "A" and an Antecedent Moisture Conditions (AMC) 2 (10yr) and 3 (100yr) are used for the study area. The proposed condition percentage impervious is 40, and the SCS runoff is 32. Refer to Appendix B for additional detail.

The project's runoff is designed to be contained in one basin that will act as both water quality infiltration, and flood storage for peak runoff mitigation. The 100- year 24 runoff event is the limiting factor for design.

# IV. ONSITE RUNOFF

## Existing Condition/Pre Development

The runoff from the subject site in the existing condition is primarily sheet flow, and the one concentration of flow has been analyzed. The sites 15 acres drains northeasterly to the western side of Pena Road and continues northerly. It is shown as Area A and Nodes 101 to 103 on the Existing Conditions Drainage Exhibit in Appendix A. The peak flow rate is 17.92 cfs and flood volume is 1.73 ac-ft.

## Proposed Condition/Post Development

The proposed condition is to utilize one basin for water quality and flood routing for the project. The Rational method was prepared for determination of time of concentration for use in the development of the Unit Hydrographs. The post development 100 year 24 hour runoff is 24.3 cfs and 3.55 ac-ft.

The post development runoff is routed through the proposed basin to confirm post development runoff could be mitigated to less than pre-development runoff. The basin is designed to be dual purpose retention and detention basins with the bottom one (1) to one and a half (1.5) feet supplying the required water quality retention and infiltration the WQMP design storms. The overall basin storage volume is used for peak runoff mitigation. A Spillway has been designed to control the outlet. The Basin has a preliminary designed 6' wide spillway at 1' deep. The following is the detail for the basin shown on the TTM;

Depth vs. Storage and Depth vs. Discharge data:

Basin Depth (Ft.)	Storage (Ac.Ft)	Outflow (CFS)	(S-O*dt/2) (Ac.Ft)	(S+O*dt/2) (Ac.Ft)
0.000	0.000	0.000	0.000	0.000
1.000	0.253	0.720	0.251	0.255
2.000	0.536	0.720	0.534	0.538
3.000	0.850	0.720	0.848	0.852
4.000	1.200	13.725	1.153	1.247

After routing through the proposed basins the post development 100 year 24 hour runoff for Area A is 13.1 cfs with 1.18 ac-ft stored. Weir designs were used for calculations of the spillways. Refer to Appendices B and C for detailed output files and the Tract Rough Grading Plans.

The primary hydraulic design elements are the roads, curb openings, storm drain, and the weir structure outleting from the basin. Roads within the project will be used to carry runoff. At the minimum design slope of 0.5%

the roads can carry 37 cfs within the curbs and 52 cfs within the right-of-way. All sub areas are within the 37 and 52 cfs capacity of the street. The runoff from area A is collected by a catch basin and storm drain line. The catch basin is in a sump condition and will be designed at final design. The outlet from the catch basin is carried by a 36" pipe to the basin.

## V. OFFSITE RUNOFF

The site is surrounded by development and is not impacted by offsite flows.

## VI. STORMWATER TREATMENT

Stormwater treatment will be provided by the bottom of the proposed basin, where the required volume will infiltrate into the groundwater. The basin exceeds the required water quality volume. Water quality calculations were prepared based on the San Bernardino County Model Water Quality Management Plan Guidance document. The following calculations were used in sizing of facilities;

- WQ Contributing area - 14.55 Acres
- 2 yr 1 hour rainfall - 0.40"
- Impervious ratio - 40% (from SBCFCD hydrology Manual)
- $C_{BMP} = 0.28$
- Drainage Area Region - Desert - Regression Coefficient  $P_6 = 1.2371$
- $P_6 = 1.2371 \times 0.40" = 0.49"$
- Regression Constant  $a = 1.963$  for 48 hours
- $P_0 = a * C_{BMP} * P_6 = 1.963 \times 0.28 \times 0.49 = 0.272$
- $V_0 = (P_0 * A)/12$ 
  - o  $V = (0.272 \times 14.55)/12 = 0.33$  acft

## VII. CONCLUSION

The proposed development of tract 20547, a 15 acre, 54 lots single family detached subdivision can be mitigated as designed and analyzed in this report to be compatible with the City of Victorville Master Plan of Drainage. The development of the subject site will not change area drainage patterns, impact any of the surrounding properties, or change any of the regional master plan facilities. The site will construct a combination retention and detention basin of sufficient size to handle water quality through infiltration, and flood mitigation through detention. The streets have been analyzed and confirmed to contain the 10 year runoff within the curb, and the 100 year runoff within the right of way. The basin and outlet structure has been designed and analyzed in conjunction with the TTM and street grades to confirm capacity to adequately handle the design storm runoff.

# REFERENCES


1. San Bernardino County Flood Control and Water Conservation District Hydrology Manual, August 1986.
2. Master Plan of Drainage for Oro Grande Wash and Adjacent Watersheds that are Tributary to the Mojave River, Williamson & Schmid, March 1992.

**APPENDIX A:  
PROJECT PRE AND POST CONDITION EXHIBITS**

IN THE CITY OF VICTORVILLE, COUNTY OF SAN BERNARDINO, STATE OF CALIFORNIA.  
**DRAINAGE EXISTING CONDITION EXHIBIT TTM 20547**

PARCELS 2, 3 AND 4 OF PARCEL MAP NO. 2619, IN THE COUNTY OF SAN BERNARDINO, STATE OF CALIFORNIA, AS PER PLAT  
 RECORDED IN BOOK 23 OF PARCEL MAPS, PAGE 44, RECORDS OF SAID COUNTY

UNITED ENGINEERING GROUP CA., INC JANUARY 2025

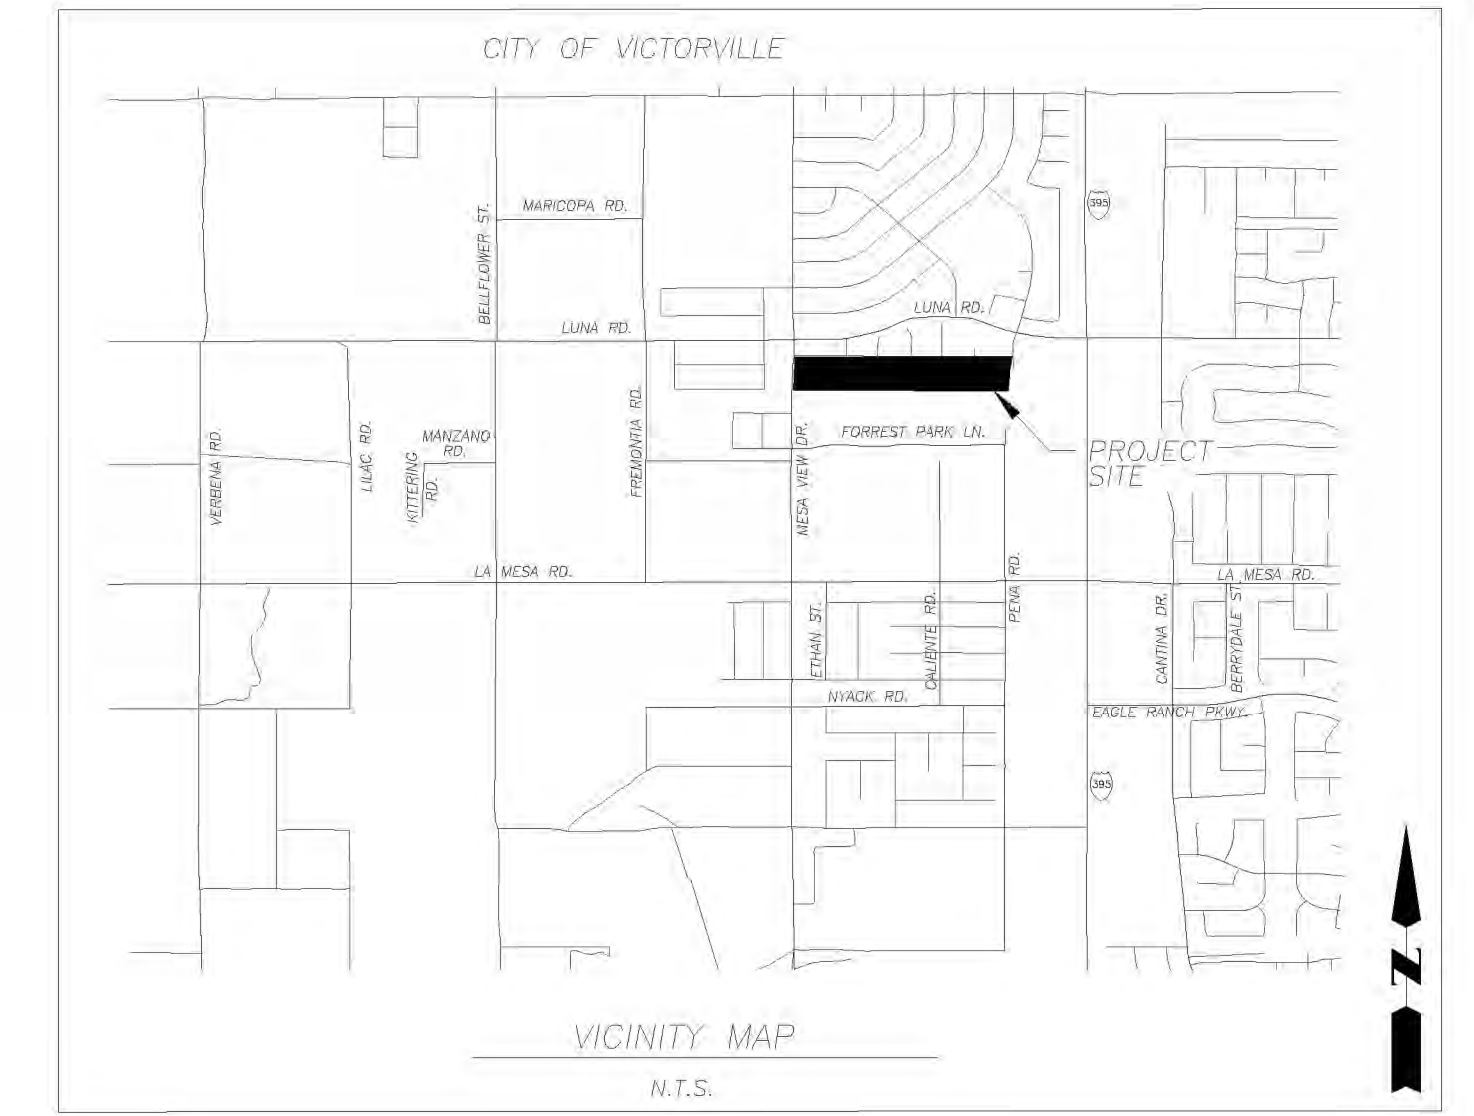

**LEGEND**

- FLOWLINE
- CONTRIBUTORY AREA BOUNDARY
- TRACT BOUNDARY
- A2  
22.4 SUB AREA IDENTIFIER AREA (ACRES)
- 302  
1752 NODE/CONCENTRATION POINT FLOWLINE ELEVATION

**GENERAL NOTES:**


1. ASSESSOR'S PARCEL NOS.: 3096-361-05, -06 & -07.
2. THE PROPERTY SHOWN HEREIN CONTAINS THE ENTIRE CONTIGUOUS OWNERSHIP.
3. TOTAL GROSS AREA = 658,917 SQ. FT., 15.13 ACRES
4. TOTAL NET AREA = 627,023 SQ. FT., 14.39 ACRES
5. TOTAL NO. OF NUMBERED LOTS = 54
6. TOTAL NO. OF LETTERED LOTS = 2
7. LOTS 1 THROUGH 54 ARE 7,200 S.F. MIN. (RESIDENTIAL LOTS)
8. NET DENSITY: 3.75 DU/AC.
9. GROSS DENSITY: 3.57 DU/AC.
10. AVERAGE LOT SIZE = 8,611 S.F.
11. CONTOUR INTERVAL = 1 FOOT (VARIES)
12. ALL SLOPES ARE 2% OR FLATTER
13. LOT DIMENSIONS SHOWN HEREIN ARE APPROXIMATE.
14. THIS MAP IS COMPILED FROM RECORD INFORMATION ONLY AND IS NOT TO BE USED AS A BOUNDARY SURVEY.
15. THE LOCATIONS OF ALL EXISTING UTILITIES SHOWN ON THIS MAP ARE APPROXIMATE.
16. ALL FRONT YARD BUILDING SETBACK LINES (BSL) ARE SHOWN AT THE MINIMUM FRONT YARD BSL = 20'.

CALCULATED Tc FROM RATIONALE = 33.9 MIN  
 (USED IN UNIT HYDROGRAPH CALCULATIONS)




**LAND USE INFORMATION:**

EXISTING ZONING = R-1/R-1T4 (SINGLE FAMILY RESIDENTIAL)  
 PROPOSED ZONING = R-1/R-1T4 (SINGLE FAMILY RESIDENTIAL)

ADJACENT EXISTING LAND USE  
 NORTH - R-1T4 (SINGLE FAMILY RESIDENTIAL)  
 EAST - C-1 (NEIGHBORHOOD RETAIL)  
 WEST - SP2-91 (VISTA VERDE SPECIFIC PLAN)  
 SOUTH - R-1T4 (SINGLE FAMILY RESIDENTIAL)

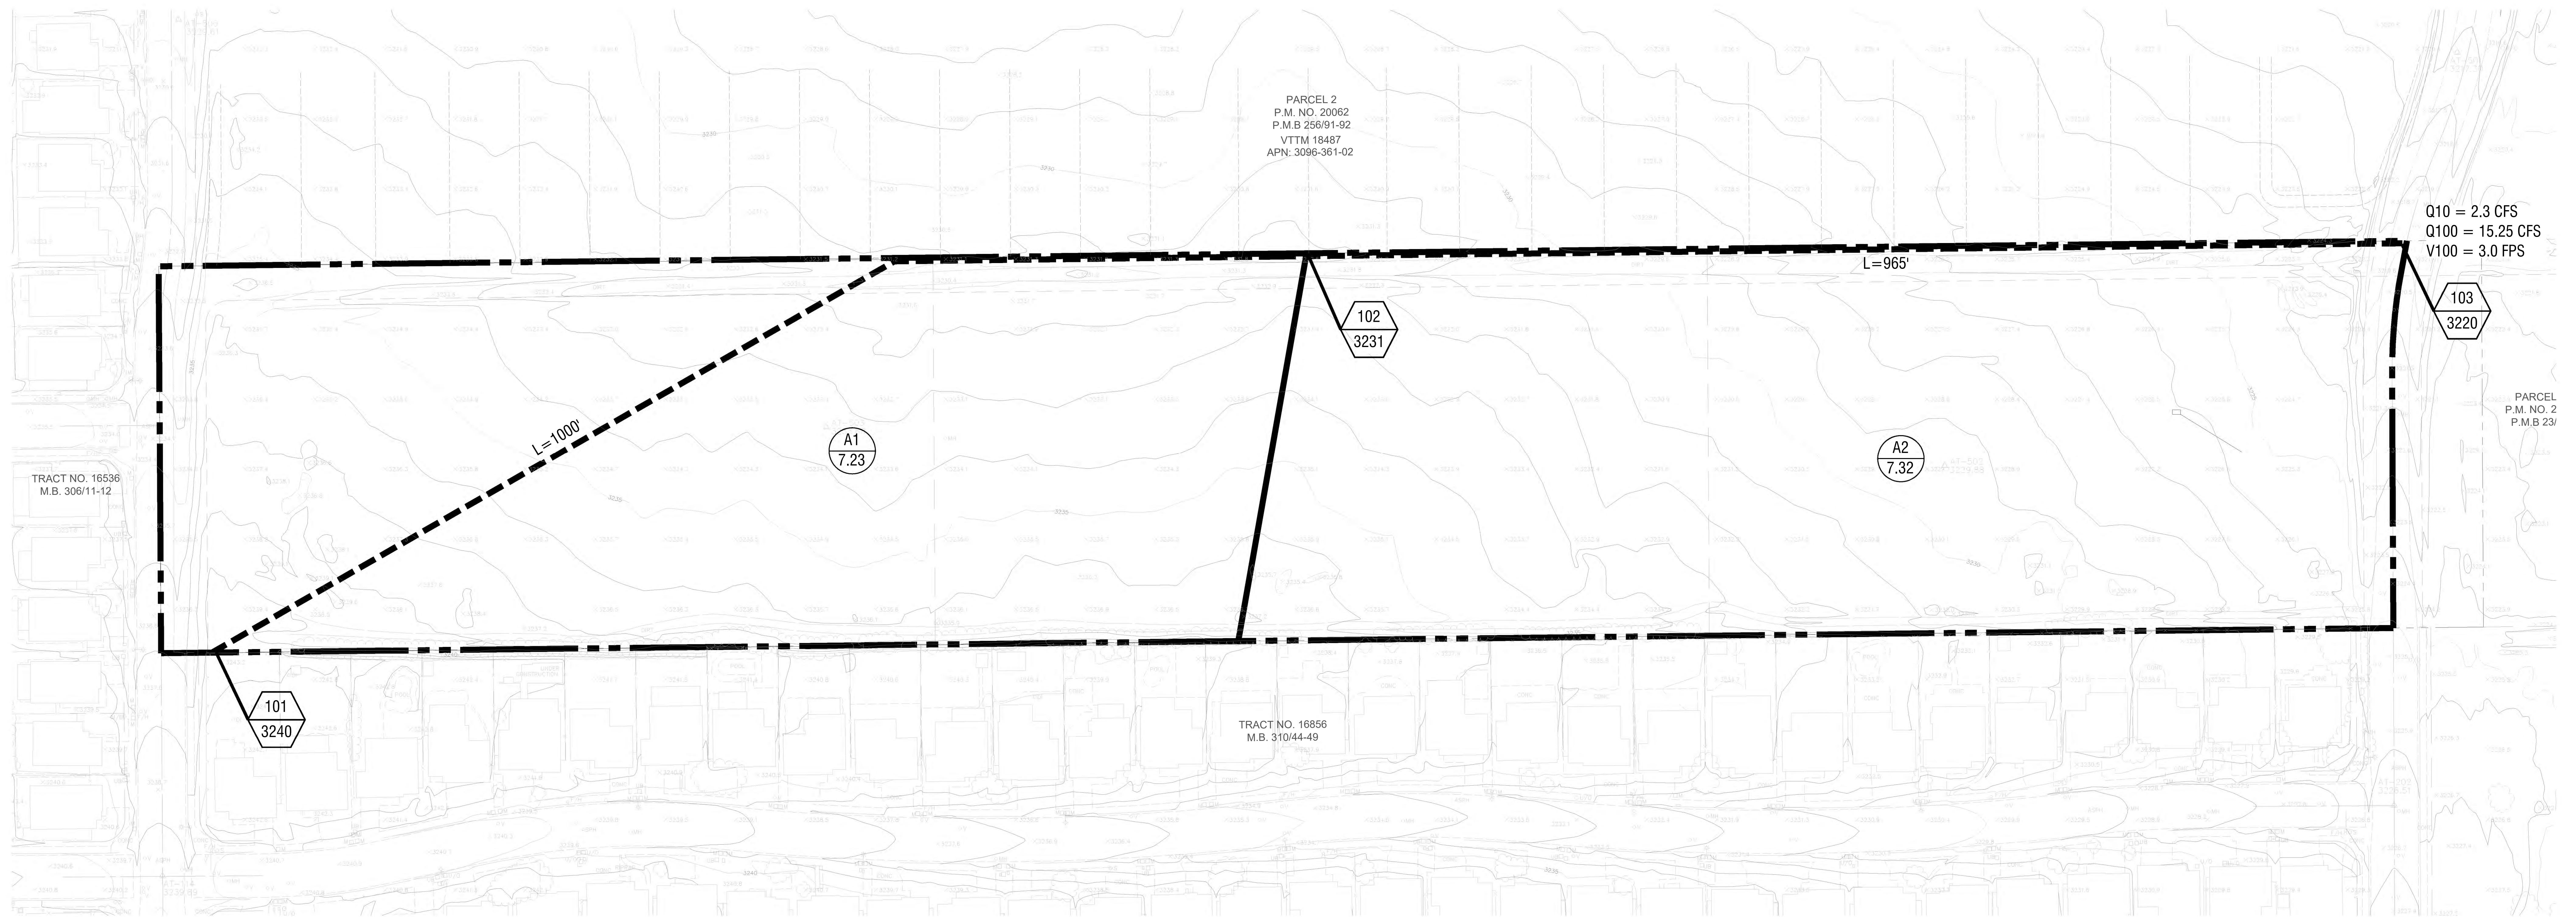

Q10 = 2.3 CFS  
 Q100 = 15.25 CFS  
 V100 = 3.0 FPS

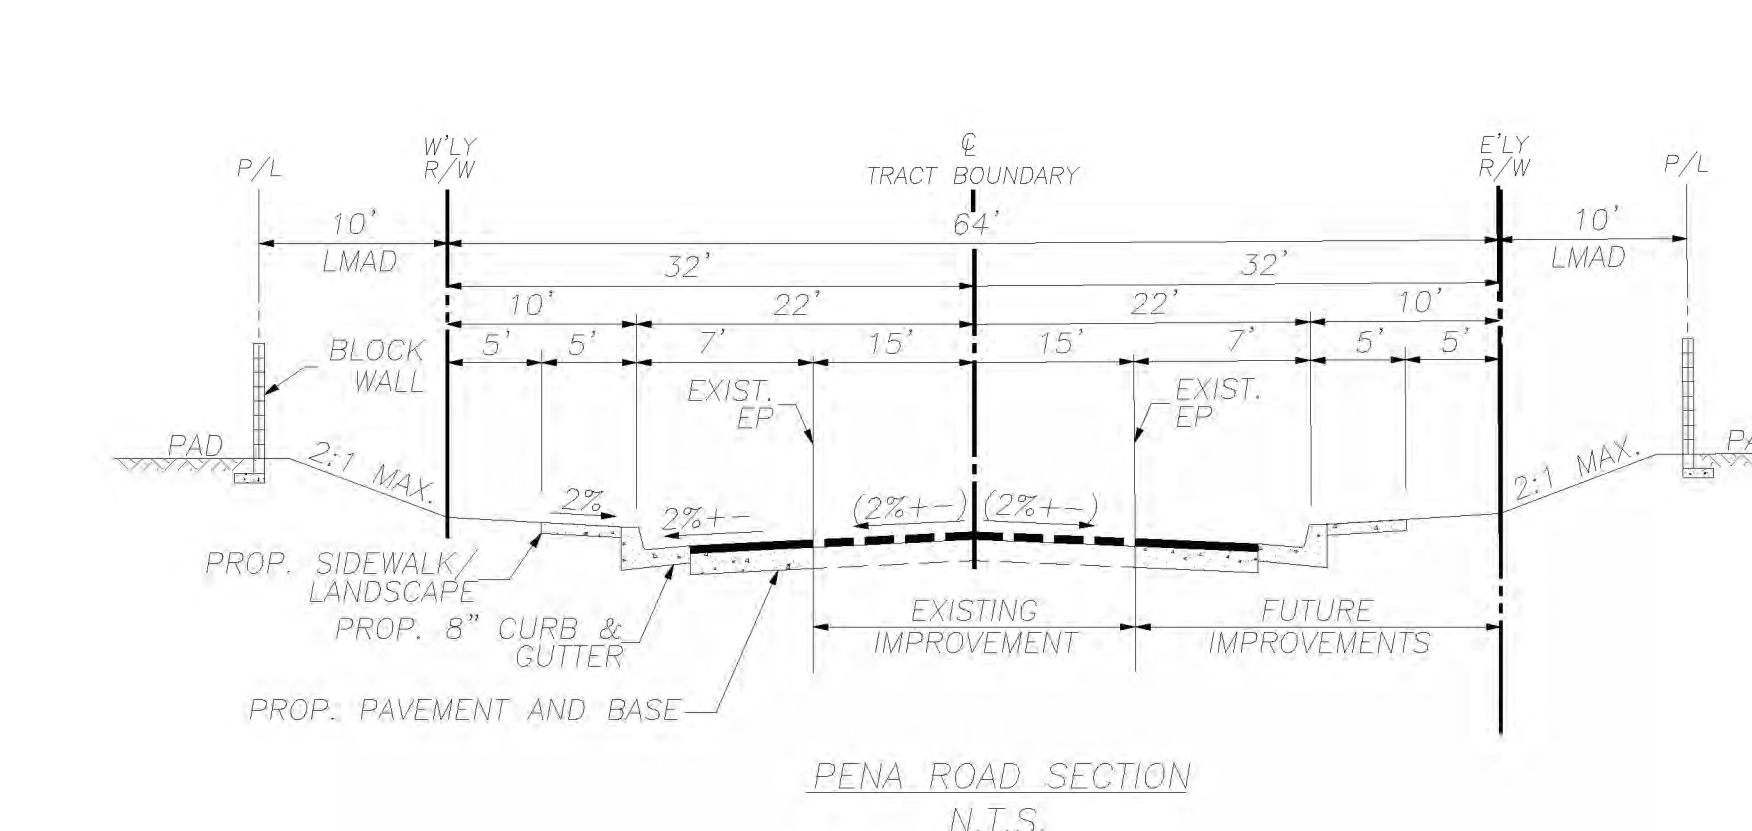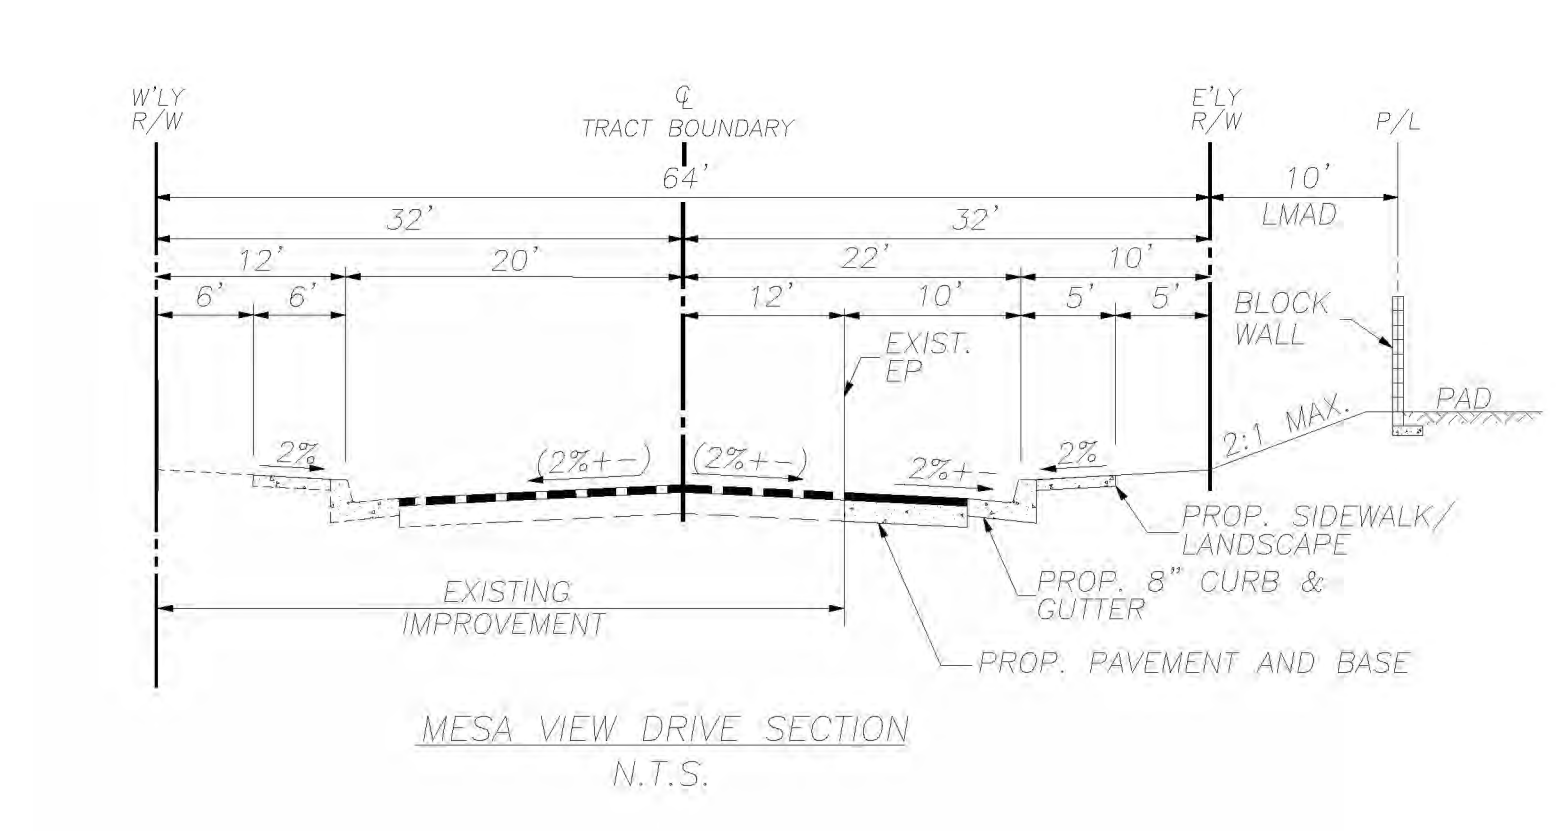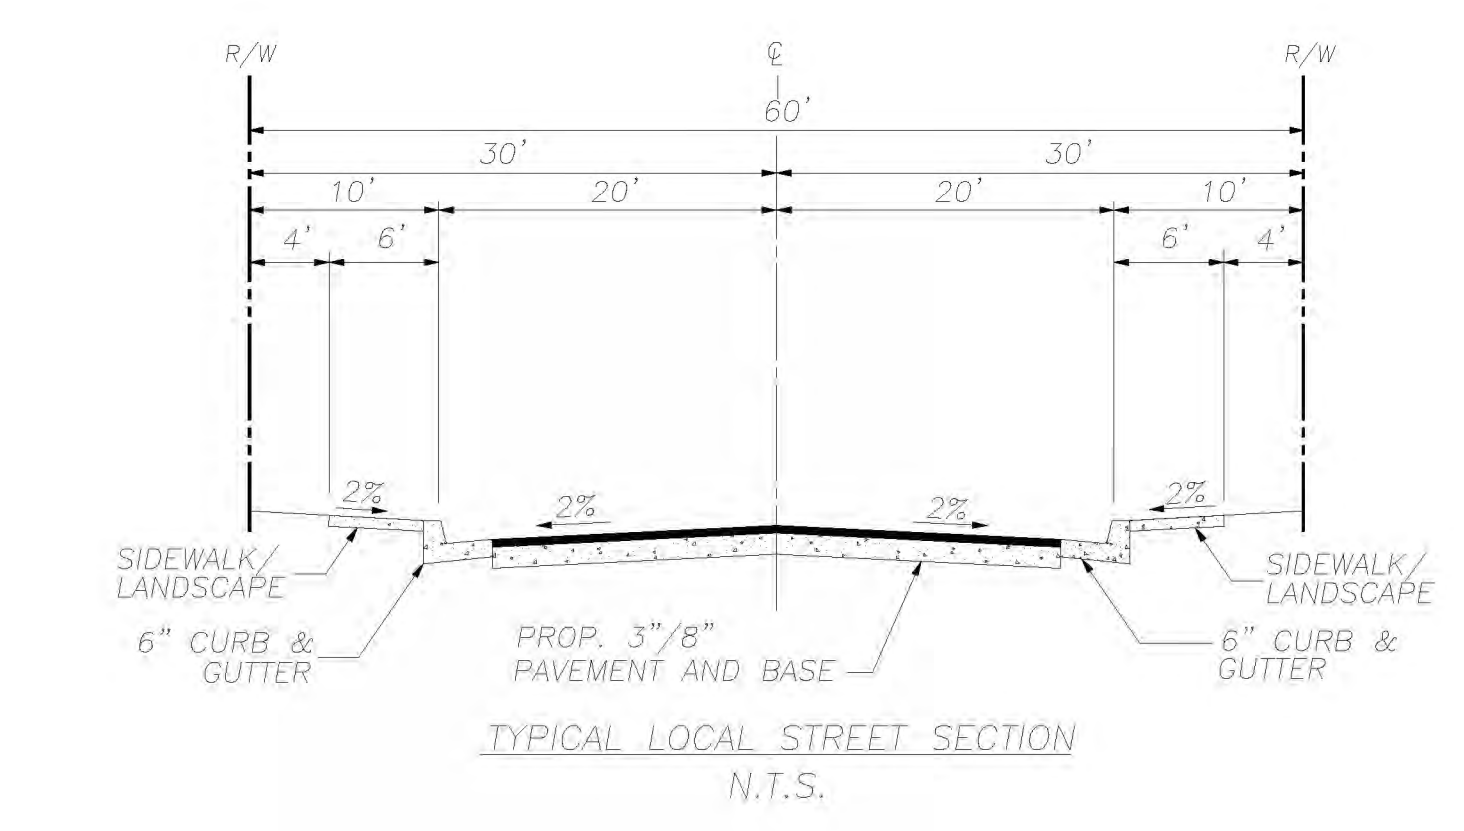

**BENCHMARK:**


CITY OF VICTORVILLE BENCHMARK NO. V-223,  
 IN TO 5' E/O N/E BDR MESA LINDA AND  
 EUCALYPTUS.  
 ELEV = 3378.91

**PREPARED BY:**

UNITED ENGINEERING GROUP-CA, INC.  
 SUITE 195  
 RANCHO CUCAMONGA, CA 91730  
 PHONE: 909.466.9240  
 www.unitedeng.com


**APPLICANT/OWNER:**

UNLOCKING VALUE INVESTMENTS, LLC  
 C/O JOSH MALHI  
 312 ARIZONA AVENUE  
 3RD FLOOR  
 SANTA MONICA, CA 90401

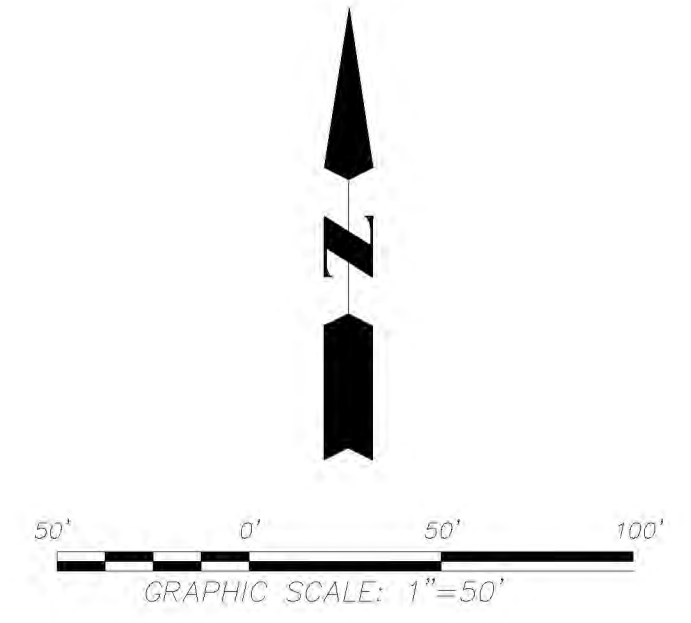

SUBMITTALS:		REVISIONS:	
NO.	DESCRIPTION	NO.	DATE

DESIGNED BY: CHRISTOPHER F. LENZ  
 DRAWN BY: R.D.E. No. 63001  
 CHECKED BY: DATE

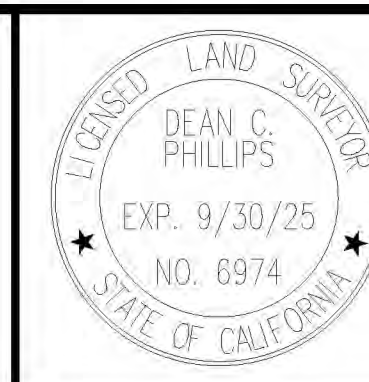

DEAN C. PHILLIPS  
 L.S. No. 6974  
 DATE



8885 Haven Avenue  
 Suite 195  
 Rancho Cucamonga,  
 CA 91730  
 Phone: 909.466.9240  
 www.unitedeng.com


**OLIVERA & PENA**  
**VESTING TTM NO. 20547**  
**EXISTING CONDITION EXHIBIT**

JANUARY 2025  
 SHEET 1 OF 1  
 PROJECT NUMBER  
 CR-30212

IN THE CITY OF VICTORVILLE, COUNTY OF SAN BERNARDINO, STATE OF CALIFORNIA.  
**DRAINAGE PROPOSED CONDITION EXHIBIT TTM 20547**

PARCELS 2, 3 AND 4 OF PARCEL MAP NO. 2619, IN THE COUNTY OF SAN BERNARDINO, STATE OF CALIFORNIA, AS PER PLAT  
 RECORDED IN BOOK 23 OF PARCEL MAPS, PAGE 44, RECORDS OF SAID COUNTY

UNITED ENGINEERING GROUP CA., INC JANUARY 2025

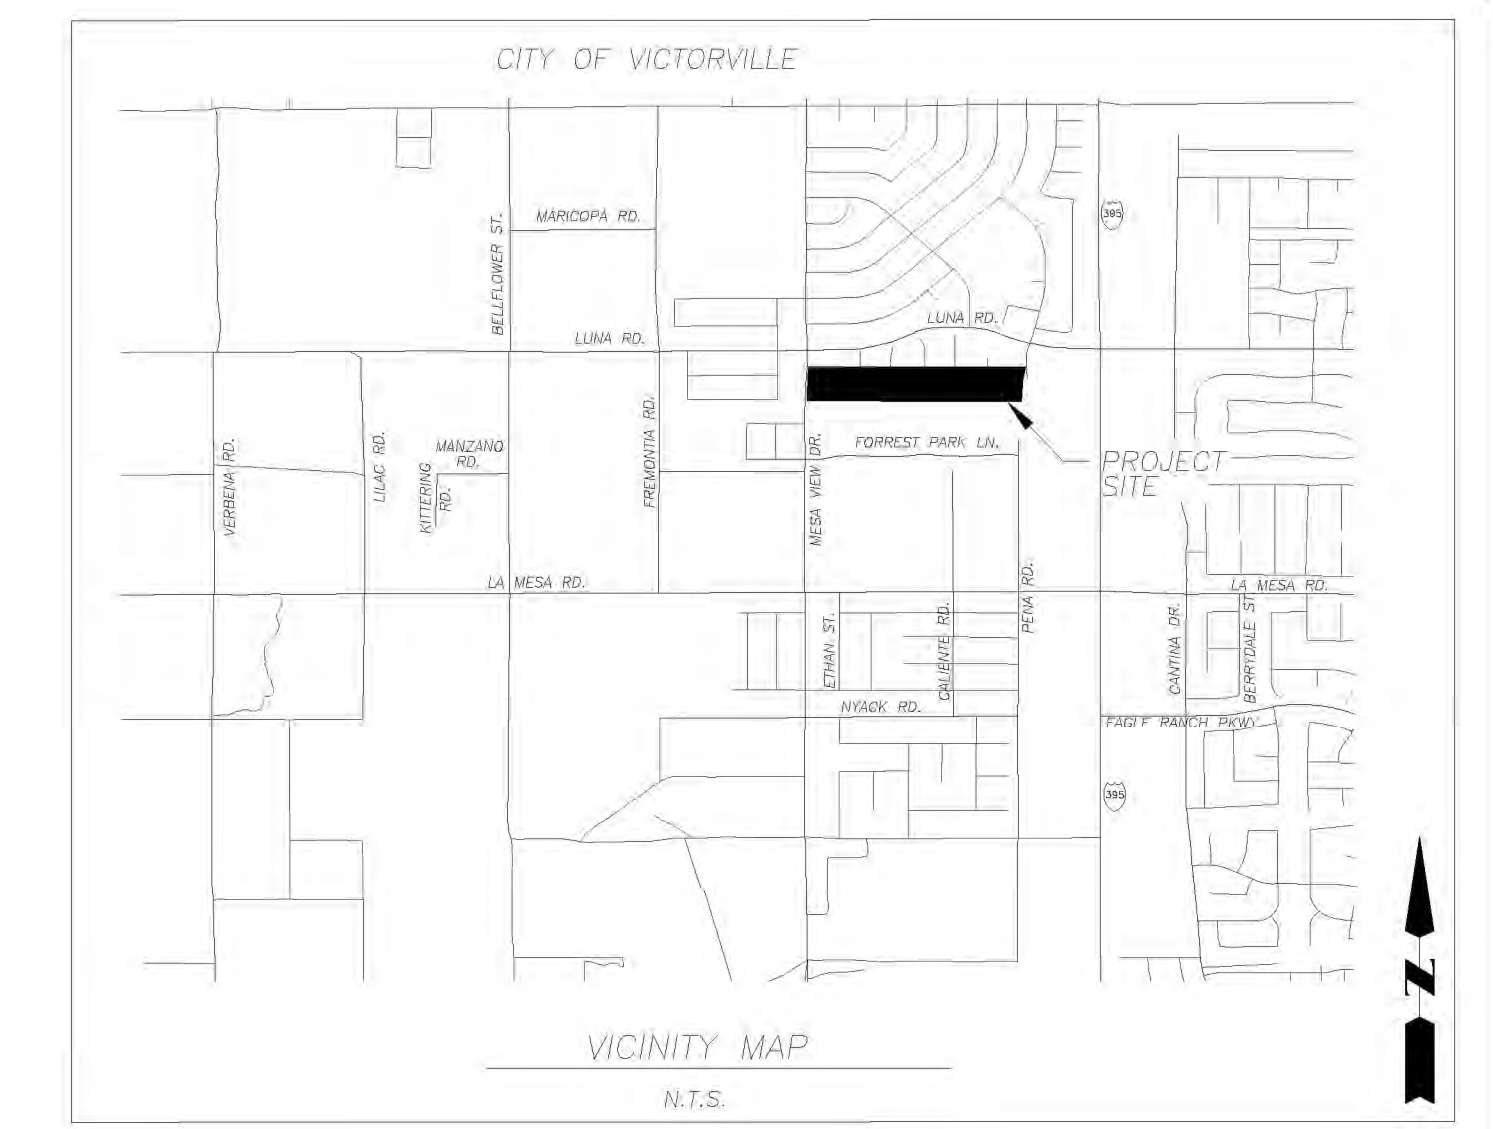

**GENERAL NOTES:**





- ASSESSOR'S PARCEL NOS: 3096-361-05, -06 & -07.
- THE PROPERTY SHOWN HEREIN CONTAINS THE ENTIRE CONTIGUOUS OWNERSHIP.
- TOTAL GROSS AREA = 658,917 SQ. FT., 15.13 ACRES
- TOTAL NET AREA = 627,023 SQ. FT., 14.39 ACRES
- TOTAL NO. OF NUMBERED LOTS = 54
- TOTAL NO. OF LETTERED LOTS = 2
- LOTS 1 THROUGH 54 ARE 7,200 S.F. MIN. (RESIDENTIAL LOTS)
- NET DENSITY: 3.75 DU/AC.
- GROSS DENSITY: 3.57 DU/AC.
- AVERAGE LOT SIZE = 8,611 S.F.
- CONTOUR INTERVAL = 1 FOOT (VARIES)
- ALL SLOPES ARE 2:1 OR FLATTER
- LOT DIMENSIONS SHOWN HEREIN ARE APPROXIMATE.
- LOT DIMENSIONS SHOWN HEREIN ARE APPROXIMATE.
- THIS MAP IS COMPILED FROM RECORD INFORMATION ONLY AND IS NOT TO BE USED AS A BOUNDARY SURVEY.
- THE LOCATIONS OF ALL EXISTING UTILITIES SHOWN ON THIS MAP ARE APPROXIMATE.
- ALL FRONT YARD BUILDING SETBACK LINES (BSL) ARE SHOWN AT THE MINIMUM FRONT YARD BSL = 20'.

**LEGEND**

- FLOWLINE
- CONTRIBUTORY AREA BOUNDARY
- TRACT BOUNDARY
- A2  
22.4 SUB AREA IDENTIFIER AREA (ACRES)
- 302  
3229 NODE/CONCENTRATION POINT FLOWLINE ELEVATION

**LAND USE INFORMATION:**

EXISTING ZONING = R-1/R-114 (SINGLE FAMILY RESIDENTIAL)  
 PROPOSED ZONING = R-1/R-114 (SINGLE FAMILY RESIDENTIAL)  
 ADJACENT EXISTING LAND USE  
 NORTH - R-114 (SINGLE FAMILY RESIDENTIAL)  
 EAST - C-1 (NEIGHBORHOOD RETAIL)  
 WEST - SP2-91 (VISTA VERDE SPECIFIC PLAN)  
 SOUTH - R-114 (SINGLE FAMILY RESIDENTIAL)

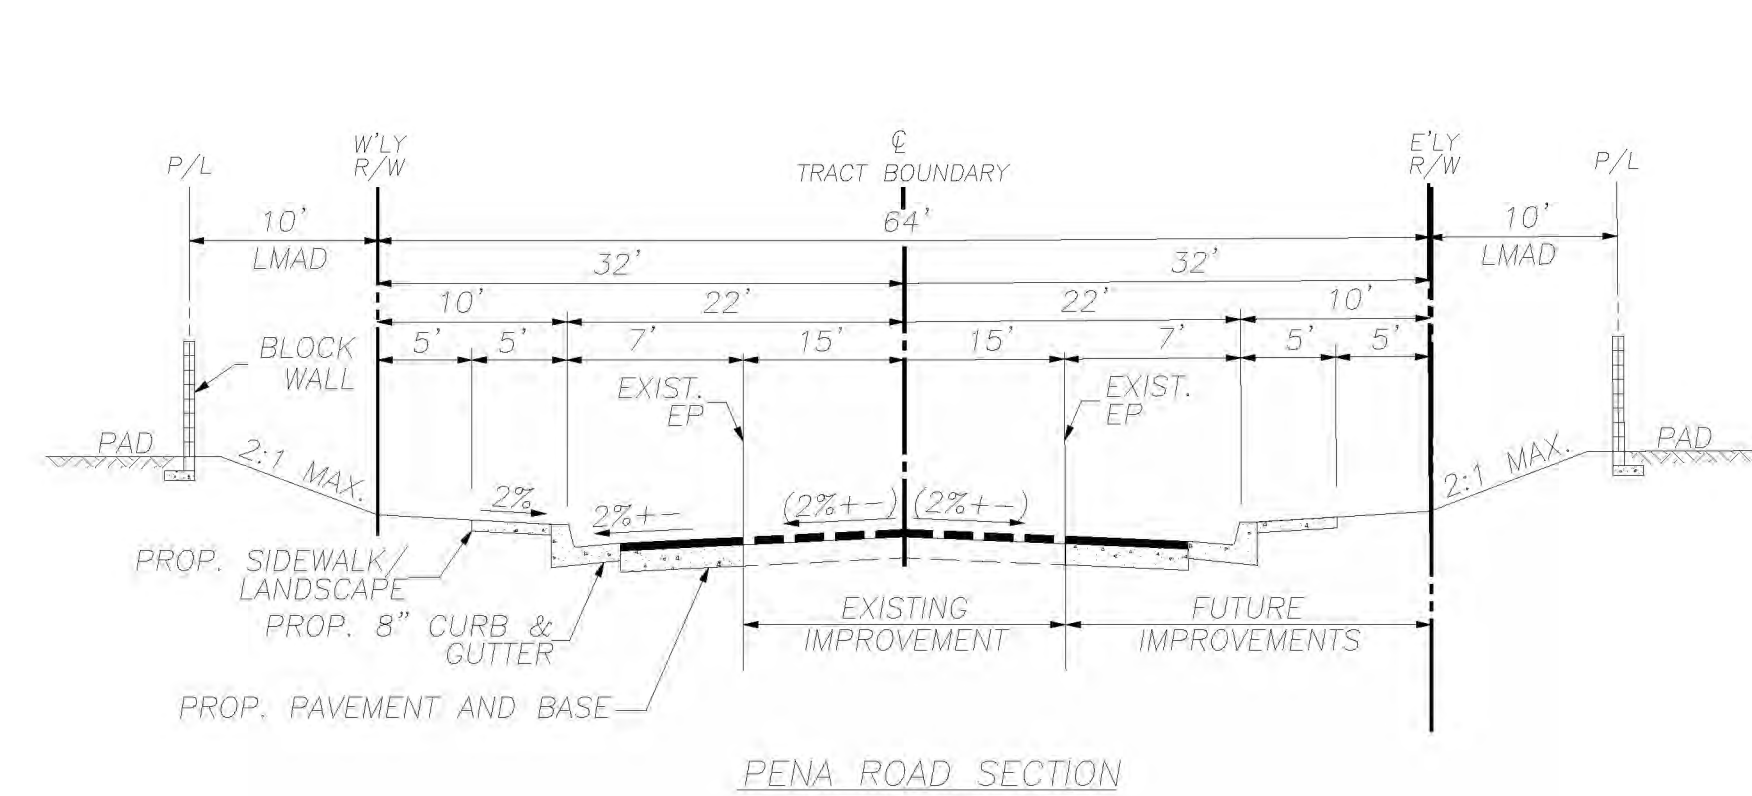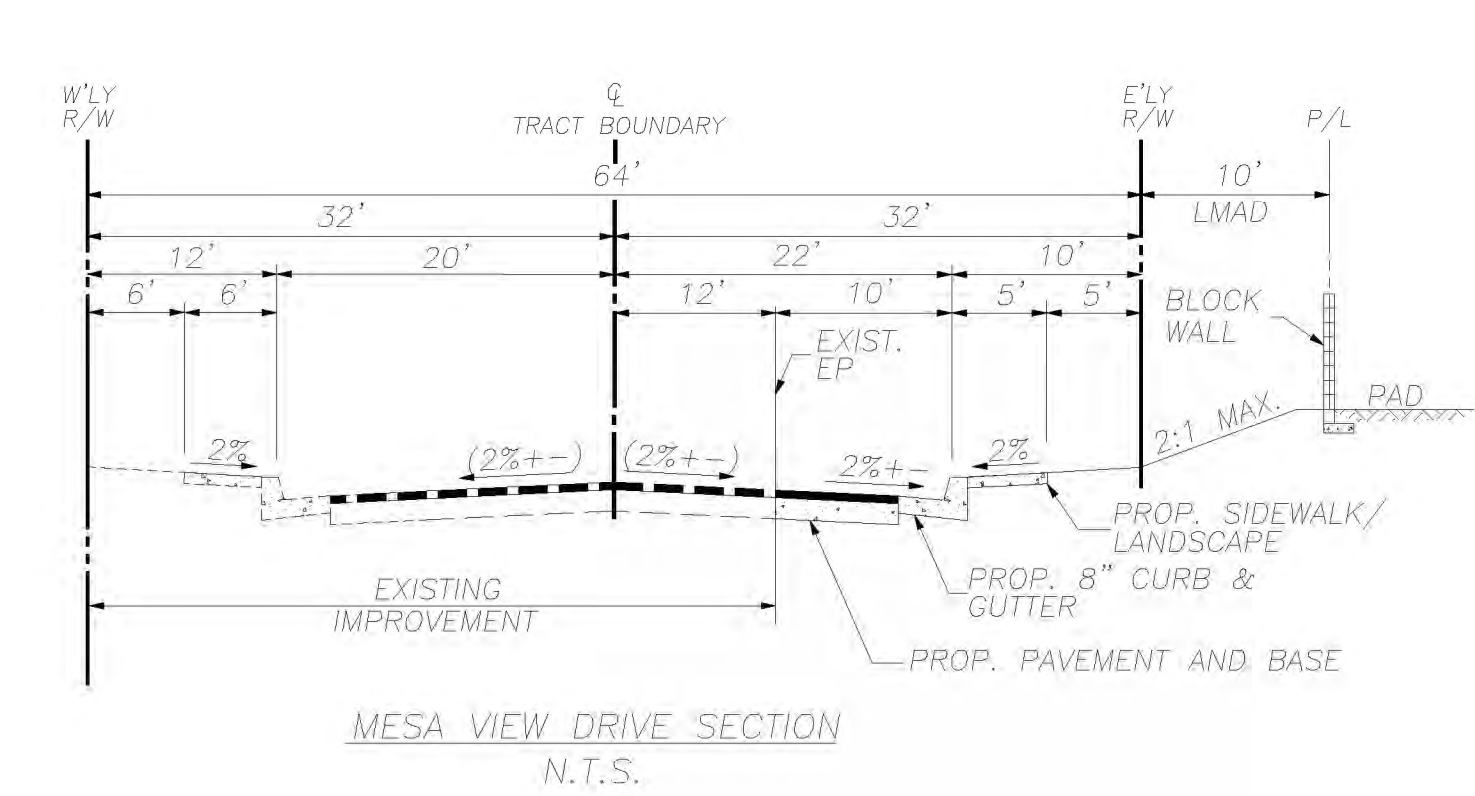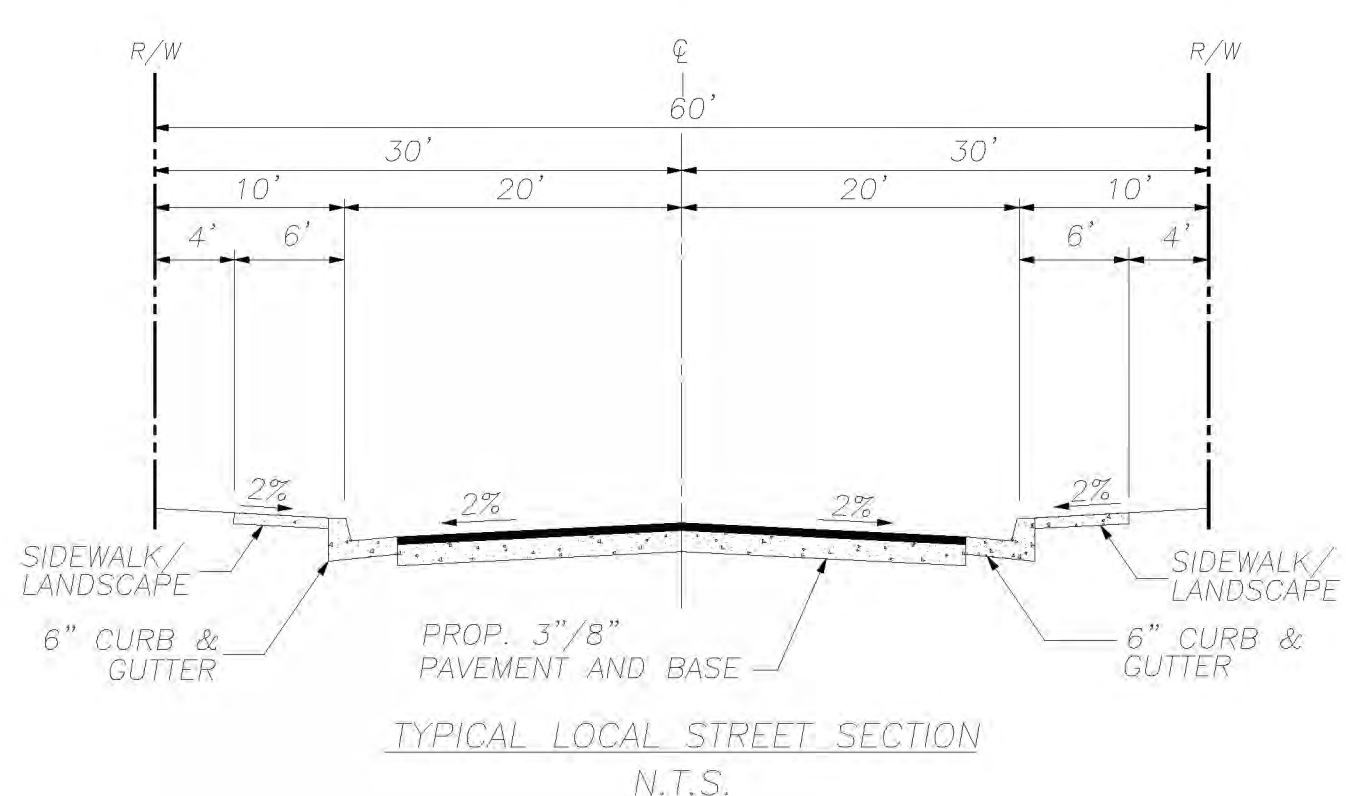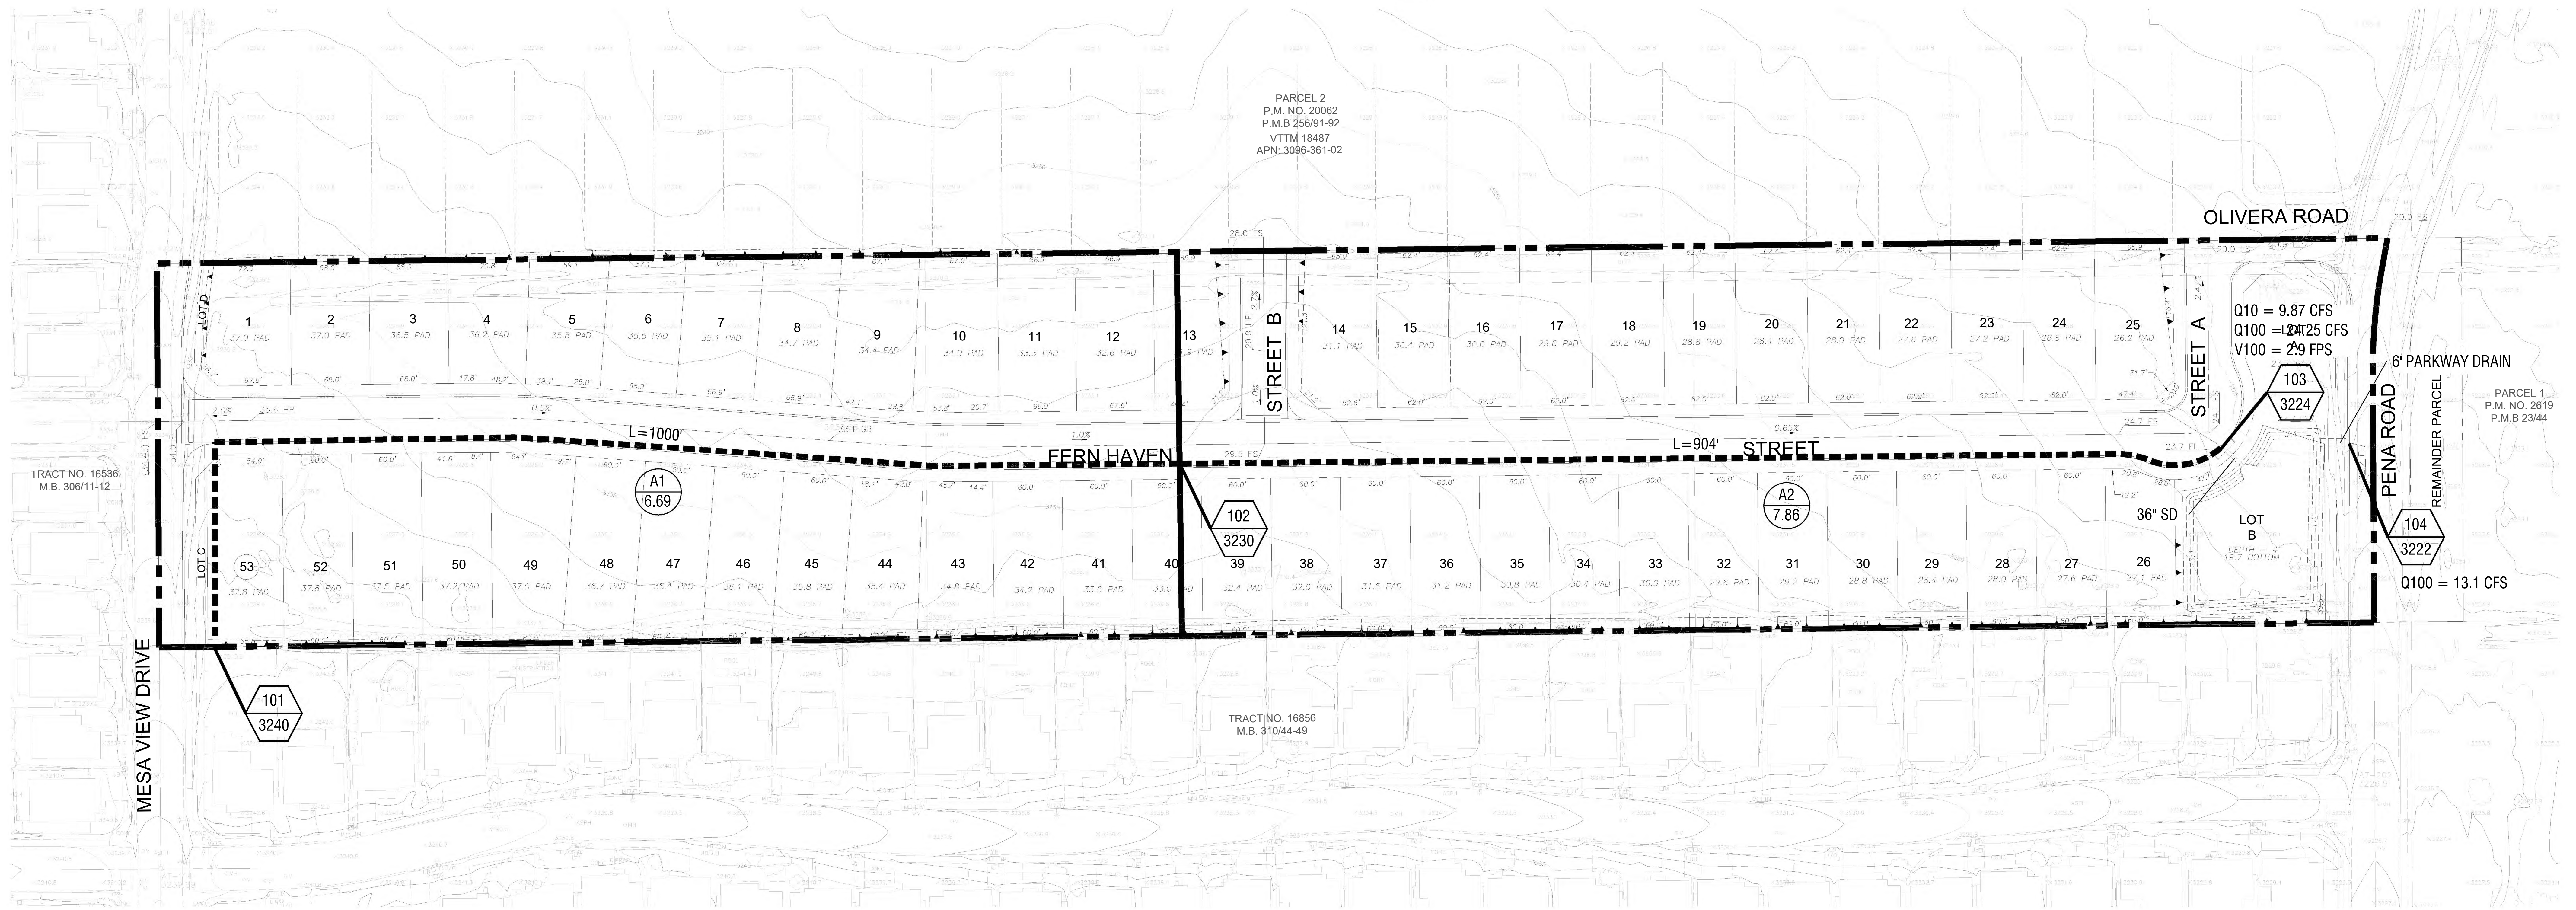

**BENCHMARK:**


CITY OF VICTORVILLE BENCHMARK NO. V-223,  
 IN TC 2° E/O N/E BCR MESA LINDA AND  
 EQUILYPTUS  
 ELEV = 3376.91

**PREPARED BY:**

UNITED ENGINEERING GROUP-CA, INC.  
 8885 HAVEN AVENUE  
 SUITE 135  
 RANCHO CUCAMONGA, CA 91730  
 PHONE: 909.466.9240  
 WWW.UNITEDENG.COM

**APPLICANT/OWNER:**

UNLOCKING VALUE INVESTMENTS, LLC  
 C/O JOSH MALH  
 312 ARIZONA AVENUE  
 3RD FLOOR  
 SANTA MONICA, CA 90401

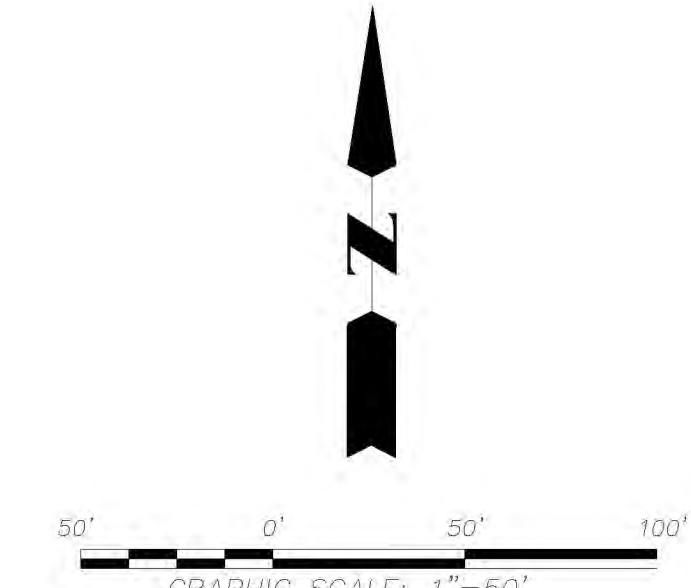

SUBMITTALS:		REVISIONS	
NO.	DESCRIPTION	NO.	DATE

DESIGNED BY: CHRISTOPHER F. LENZ DATE: \_\_\_\_\_  
 DRAWN BY: \_\_\_\_\_ R.C.E. No. 63001  
 CHECKED BY: \_\_\_\_\_

LAND SURVEYOR  
 DEAN C. PHILLIPS  
 NO. 6974  
 EXP. 9/30/25  
 STATE OF CALIFORNIA  
 DEAN C. PHILLIPS DATE: \_\_\_\_\_  
 L.S. No. 6974  
 dphillips@unitedeng.com

8885 Haven Avenue  
 Suite 135  
 Rancho Cucamonga,  
 CA 91730  
 Phone: 909.466.9240  
 www.unitedeng.com

OLIVERA & PENA  
 VESTING TTM NO. 20547  
 PROPOSED CONDITION EXHIBIT

JANUARY 2025  
 SHEET # OF 1  
 PROJECT NUMBER  
 CA-30212

**APPENDIX B:  
PROJECT RATIONAL  
SCS UNIT HYDROGRAPH  
HYDROLOGY STUDY INFORMATION**



**NOAA Atlas 14, Volume 6, Version 2**  
**Location name: Victorville, California, USA\***  
**Latitude: 34.4862°, Longitude: -117.4113°**  
**Elevation: 3257.47 ft\*\***



\* source: ESRI Maps  
 \*\* source: USGS

**POINT PRECIPITATION FREQUENCY ESTIMATES**

Sanja Perica, Sarah Dietz, Sarah Heim, Lillian Hiner, Kazungu Maitaria, Deborah Martin, Sandra Pavlovic, Ishani Roy, Carl Trypaluk, Dale Unruh, Fenglin Yan, Michael Yekta, Tan Zhao, Geoffrey Bonnin, Daniel Brewer, Li-Chuan Chen, Tye Parzybok, John Yarchoan

NOAA, National Weather Service, Silver Spring, Maryland

[PF tabular](#) | [PF graphical](#) | [Maps & aeriels](#)

**PF tabular**





<b>PDS-based point precipitation frequency estimates with 90% confidence intervals (in inches)<sup>1</sup></b>										
<b>Duration</b>	<b>Average recurrence interval (years)</b>									
	<b>1</b>	<b>2</b>	<b>5</b>	<b>10</b>	<b>25</b>	<b>50</b>	<b>100</b>	<b>200</b>	<b>500</b>	<b>1000</b>
<b>5-min</b>	<b>0.078</b> (0.064-0.095)	<b>0.112</b> (0.093-0.137)	<b>0.158</b> (0.130-0.194)	<b>0.195</b> (0.159-0.241)	<b>0.245</b> (0.194-0.314)	<b>0.284</b> (0.220-0.371)	<b>0.324</b> (0.244-0.433)	<b>0.364</b> (0.267-0.501)	<b>0.419</b> (0.295-0.601)	<b>0.462</b> (0.314-0.685)
<b>10-min</b>	<b>0.111</b> (0.092-0.136)	<b>0.161</b> (0.133-0.197)	<b>0.226</b> (0.186-0.278)	<b>0.279</b> (0.228-0.346)	<b>0.352</b> (0.278-0.450)	<b>0.407</b> (0.315-0.532)	<b>0.464</b> (0.350-0.621)	<b>0.522</b> (0.383-0.718)	<b>0.601</b> (0.423-0.862)	<b>0.662</b> (0.450-0.982)
<b>15-min</b>	<b>0.135</b> (0.111-0.165)	<b>0.195</b> (0.161-0.238)	<b>0.274</b> (0.225-0.336)	<b>0.338</b> (0.276-0.418)	<b>0.425</b> (0.336-0.544)	<b>0.493</b> (0.381-0.643)	<b>0.561</b> (0.424-0.751)	<b>0.631</b> (0.464-0.869)	<b>0.727</b> (0.512-1.04)	<b>0.800</b> (0.544-1.19)
<b>30-min</b>	<b>0.204</b> (0.169-0.249)	<b>0.295</b> (0.243-0.361)	<b>0.414</b> (0.341-0.508)	<b>0.511</b> (0.418-0.632)	<b>0.643</b> (0.508-0.823)	<b>0.745</b> (0.576-0.973)	<b>0.849</b> (0.641-1.14)	<b>0.955</b> (0.701-1.31)	<b>1.10</b> (0.774-1.58)	<b>1.21</b> (0.824-1.80)
<b>60-min</b>	<b>0.276</b> (0.228-0.337)	<b>0.399</b> (0.330-0.488)	<b>0.561</b> (0.462-0.688)	<b>0.692</b> (0.565-0.856)	<b>0.871</b> (0.688-1.11)	<b>1.01</b> (0.781-1.32)	<b>1.15</b> (0.868-1.54)	<b>1.29</b> (0.949-1.78)	<b>1.49</b> (1.05-2.13)	<b>1.64</b> (1.12-2.43)
<b>2-hr</b>	<b>0.388</b> (0.321-0.474)	<b>0.528</b> (0.436-0.646)	<b>0.718</b> (0.591-0.881)	<b>0.878</b> (0.717-1.09)	<b>1.10</b> (0.872-1.41)	<b>1.28</b> (0.993-1.68)	<b>1.47</b> (1.11-1.97)	<b>1.67</b> (1.23-2.30)	<b>1.95</b> (1.37-2.79)	<b>2.17</b> (1.48-3.22)
<b>3-hr</b>	<b>0.488</b> (0.403-0.596)	<b>0.652</b> (0.538-0.797)	<b>0.878</b> (0.723-1.08)	<b>1.07</b> (0.875-1.33)	<b>1.35</b> (1.07-1.73)	<b>1.57</b> (1.22-2.05)	<b>1.81</b> (1.37-2.42)	<b>2.07</b> (1.52-2.85)	<b>2.43</b> (1.71-3.49)	<b>2.73</b> (1.86-4.05)
<b>6-hr</b>	<b>0.669</b> (0.553-0.817)	<b>0.885</b> (0.731-1.08)	<b>1.19</b> (0.980-1.46)	<b>1.46</b> (1.19-1.80)	<b>1.85</b> (1.46-2.36)	<b>2.17</b> (1.68-2.83)	<b>2.51</b> (1.90-3.36)	<b>2.89</b> (2.12-3.98)	<b>3.45</b> (2.43-4.94)	<b>3.91</b> (2.66-5.80)
<b>12-hr</b>	<b>0.834</b> (0.690-1.02)	<b>1.15</b> (0.949-1.41)	<b>1.60</b> (1.31-1.96)	<b>1.98</b> (1.62-2.45)	<b>2.55</b> (2.02-3.26)	<b>3.02</b> (2.34-3.95)	<b>3.53</b> (2.67-4.73)	<b>4.09</b> (3.00-5.63)	<b>4.90</b> (3.45-7.03)	<b>5.58</b> (3.80-8.29)
<b>24-hr</b>	<b>1.14</b> (1.01-1.31)	<b>1.64</b> (1.46-1.89)	<b>2.35</b> (2.08-2.72)	<b>2.97</b> (2.60-3.46)	<b>3.87</b> (3.28-4.66)	<b>4.61</b> (3.83-5.67)	<b>5.41</b> (4.38-6.81)	<b>6.29</b> (4.95-8.14)	<b>7.56</b> (5.72-10.2)	<b>8.62</b> (6.30-12.0)
<b>2-day</b>	<b>1.23</b> (1.09-1.41)	<b>1.76</b> (1.56-2.02)	<b>2.51</b> (2.22-2.90)	<b>3.17</b> (2.77-3.69)	<b>4.13</b> (3.50-4.98)	<b>4.94</b> (4.10-6.07)	<b>5.82</b> (4.71-7.33)	<b>6.78</b> (5.34-8.78)	<b>8.20</b> (6.20-11.1)	<b>9.39</b> (6.86-13.1)
<b>3-day</b>	<b>1.31</b> (1.16-1.51)	<b>1.86</b> (1.65-2.14)	<b>2.64</b> (2.33-3.05)	<b>3.33</b> (2.92-3.88)	<b>4.34</b> (3.68-5.23)	<b>5.19</b> (4.31-6.38)	<b>6.12</b> (4.96-7.71)	<b>7.14</b> (5.63-9.25)	<b>8.65</b> (6.54-11.7)	<b>9.92</b> (7.24-13.9)
<b>4-day</b>	<b>1.41</b> (1.25-1.63)	<b>1.99</b> (1.76-2.30)	<b>2.82</b> (2.49-3.26)	<b>3.55</b> (3.11-4.14)	<b>4.63</b> (3.92-5.58)	<b>5.53</b> (4.59-6.80)	<b>6.51</b> (5.27-8.20)	<b>7.59</b> (5.98-9.84)	<b>9.19</b> (6.95-12.4)	<b>10.5</b> (7.69-14.7)
<b>7-day</b>	<b>1.54</b> (1.36-1.77)	<b>2.15</b> (1.90-2.47)	<b>3.01</b> (2.66-3.48)	<b>3.77</b> (3.31-4.40)	<b>4.89</b> (4.14-5.89)	<b>5.81</b> (4.82-7.15)	<b>6.81</b> (5.52-8.58)	<b>7.91</b> (6.23-10.2)	<b>9.52</b> (7.19-12.8)	<b>10.9</b> (7.93-15.2)
<b>10-day</b>	<b>1.64</b> (1.46-1.89)	<b>2.28</b> (2.02-2.63)	<b>3.19</b> (2.82-3.69)	<b>3.98</b> (3.49-4.64)	<b>5.14</b> (4.36-6.19)	<b>6.10</b> (5.06-7.50)	<b>7.13</b> (5.78-8.98)	<b>8.26</b> (6.51-10.7)	<b>9.90</b> (7.48-13.4)	<b>11.3</b> (8.23-15.7)
<b>20-day</b>	<b>1.99</b> (1.77-2.30)	<b>2.75</b> (2.44-3.17)	<b>3.82</b> (3.37-4.41)	<b>4.75</b> (4.16-5.53)	<b>6.11</b> (5.18-7.36)	<b>7.22</b> (6.00-8.88)	<b>8.42</b> (6.82-10.6)	<b>9.73</b> (7.66-12.6)	<b>11.6</b> (8.77-15.7)	<b>13.2</b> (9.61-18.4)
<b>30-day</b>	<b>2.34</b> (2.07-2.69)	<b>3.20</b> (2.83-3.68)	<b>4.41</b> (3.90-5.10)	<b>5.47</b> (4.79-6.38)	<b>7.02</b> (5.95-8.45)	<b>8.29</b> (6.88-10.2)	<b>9.65</b> (7.82-12.2)	<b>11.1</b> (8.76-14.4)	<b>13.2</b> (10.0-17.9)	<b>15.0</b> (10.9-20.9)
<b>45-day</b>	<b>2.75</b> (2.44-3.16)	<b>3.71</b> (3.28-4.27)	<b>5.07</b> (4.48-5.86)	<b>6.26</b> (5.48-7.29)	<b>8.00</b> (6.78-9.63)	<b>9.43</b> (7.82-11.6)	<b>11.0</b> (8.87-13.8)	<b>12.6</b> (9.93-16.3)	<b>15.0</b> (11.3-20.2)	<b>16.9</b> (12.4-23.6)
<b>60-day</b>	<b>3.10</b> (2.75-3.56)	<b>4.12</b> (3.65-4.75)	<b>5.58</b> (4.93-6.45)	<b>6.85</b> (6.00-7.98)	<b>8.72</b> (7.39-10.5)	<b>10.3</b> (8.51-12.6)	<b>11.9</b> (9.64-15.0)	<b>13.7</b> (10.8-17.7)	<b>16.2</b> (12.3-21.9)	<b>18.3</b> (13.4-25.6)

<sup>1</sup> Precipitation frequency (PF) estimates in this table are based on frequency analysis of partial duration series (PDS). Numbers in parenthesis are PF estimates at lower and upper bounds of the 90% confidence interval. The probability that precipitation frequency estimates (for a given duration and average recurrence interval) will be greater than the upper bound (or less than the lower bound) is 5%. Estimates at upper bounds are not checked against probable maximum precipitation (PMP) estimates and may be higher than currently valid PMP values. Please refer to NOAA Atlas 14 document for more information.

[Back to Top](#)

# PF graphical

PDS-based depth-duration-frequency (DDF) curves  
 Latitude: 34.4862°, Longitude: -117.4113°

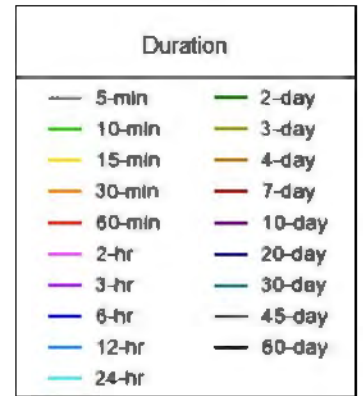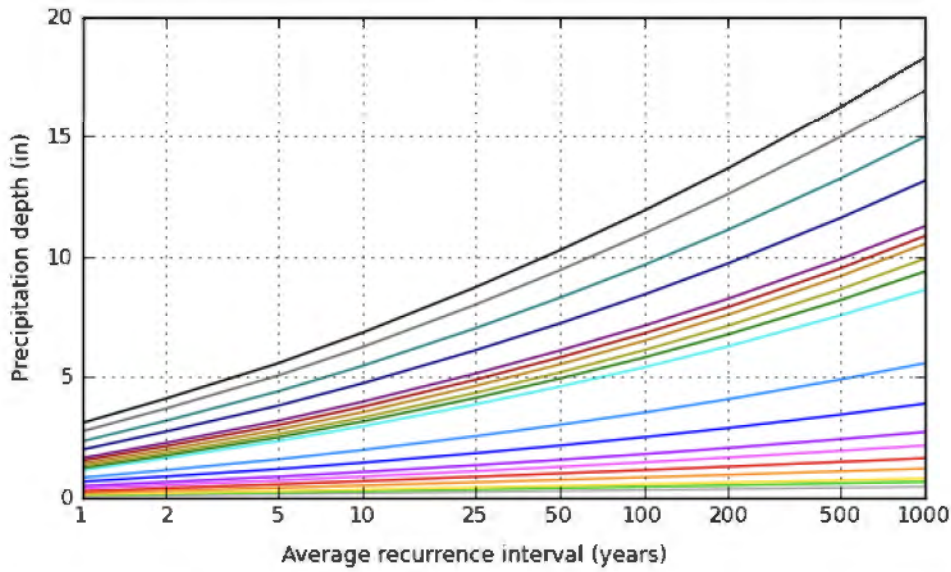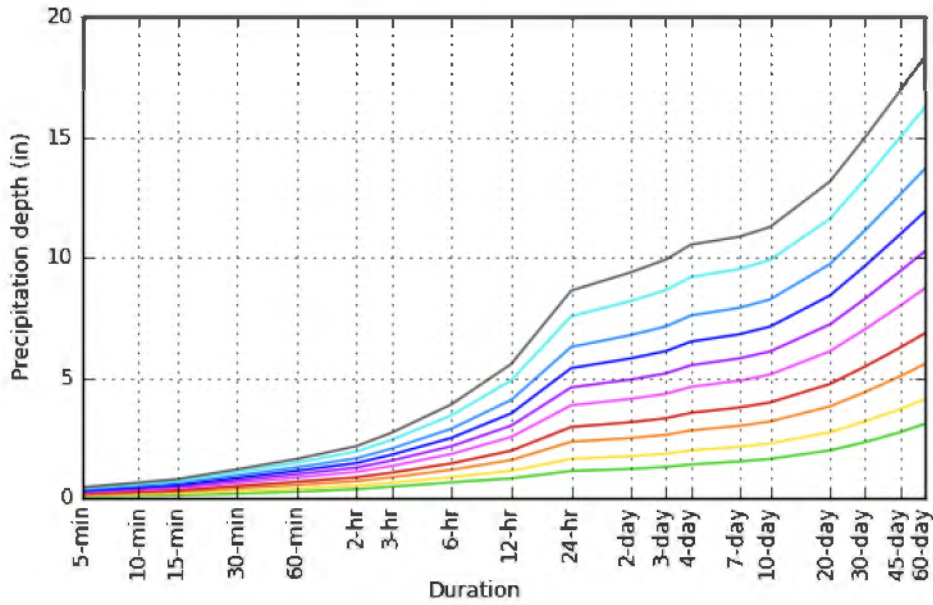

[Back to Top](#)

## Maps & aerials

Small scale terrain



Large scale terrain



Large scale map



Large scale aerial



[Back to Top](#)

---

[US Department of Commerce](#)  
[National Oceanic and Atmospheric Administration](#)  
[National Weather Service](#)  
[National Water Center](#)  
1325 East West Highway  
Silver Spring, MD 20910  
Questions?: [HDSC.Questions@noaa.gov](mailto:HDSC.Questions@noaa.gov)

[Disclaimer](#)

**Curve (I) Numbers of Hydrologic Soil-Cover Complexes For Pervious Areas-AMC II**

Cover Type (3)	Quality of Cover (2)	Soil Group			
		A	B	C	D
<b><u>NATURAL COVERS -</u></b>					
Barren (Rockland, eroded and graded land)		78	86	91	93
Chaparral, Broadleaf (Manzonita, ceanothus and scrub oak)	Poor	53	70	80	85
	Fair	40	63	75	81
	Good	31	57	71	78
Chaparral, Narrowleaf (Chamise and redshank)	Poor	71	82	88	91
	Fair	55	72	81	86
Grass, Annual or Perennial	Poor	67	78	86	89
	Fair	50	69	79	84
	Good	38	61	74	80
Meadows or Cienegas (Areas with seasonally high water table, principal vegetation is sod forming grass)	Poor	63	77	85	88
	Fair	51	70	80	84
	Good	30	58	71	78
Open Brush (Soft wood shrubs - buckwheat, sage, etc.)	Poor	62	76	84	88
	Fair	46	66	77	83
	Good	41	63	75	81
Woodland (Coniferous or broadleaf trees predominate. Canopy density is at least 50 percent.)	Poor	45	66	77	83
	Fair	36	60	73	79
	Good	25	55	70	77
Woodland, Grass (Coniferous or broadleaf trees with canopy density from 20 to 50 percent)	Poor	57	73	82	86
	Fair	44	65	77	82
	Good	33	58	72	79
<b><u>URBAN COVERS -</u></b>					
Residential or Commercial Landscaping (Lawn, shrubs, etc.)	Good	32	56	69	75
Turf (Irrigated and mowed grass)	Poor	58	74	83	87
	Fair	44	65	77	82
	Good	33	58	72	79
<b><u>AGRICULTURAL COVERS -</u></b>					
Fallow (Land plowed but not tilled or seeded)		77	86	91	94

**SAN BERNARDINO COUNTY**  
**HYDROLOGY MANUAL**

**CURVE NUMBERS**  
**FOR**  
**PERVIOUS AREAS**

**ACTUAL IMPERVIOUS COVER**

Land Use (1)	Range-Percent	Recommended Value For Average Conditions-Percent (2)
Natural or Agriculture	0 - 0	0
Public Park	10 - 25	15
School	30 - 50	40
Single Family Residential: (3)		
2.5 acre lots	5 - 15	10
1 acre lots	10 - 25	20
2 dwellings/acre	20 - 40	30
3-4 dwellings/acre	30 - 50	40
5-7 dwellings/acre	35 - 55	50
8-10 dwellings/acre	50 - 70	60
More than 10 dwellings/acre	65 - 90	80
Multiple Family Residential:		
Condominiums	45 - 70	65
Apartments	65 - 90	80
Mobile Home Park	60 - 85	75
Commercial, Downtown Business or Industrial	80 - 100	90

**Notes:**

1. Land use should be based on ultimate development of the watershed. Long range master plans for the County and incorporated cities should be reviewed to insure reasonable land use assumptions.
2. Recommended values are based on average conditions which may not apply to a particular study area. The percentage impervious may vary greatly even on comparable sized lots due to differences in dwelling size, improvements, etc. Landscape practices should also be considered as it is common in some areas to use ornamental gravels underlain by impervious plastic materials in place of lawns and shrubs. A field investigation of a study area shall always be made, and a review of aerial photos, where available, may assist in estimating the percentage of impervious cover in developed areas.
3. For typical equestrian subdivisions increase impervious area 5 percent over the values recommended in the table above.

**SAN BERNARDINO COUNTY**  
**HYDROLOGY MANUAL**

**ACTUAL IMPERVIOUS COVER**  
**FOR**  
**DEVELOPED AREAS**

## San Bernardino County, California, Mojave River Area

### 112—CAJON SAND, 0 TO 2 PERCENT SLOPES

#### Map Unit Setting

*National map unit symbol:* hkrj

*Elevation:* 1,800 to 3,200 feet

*Mean annual precipitation:* 3 to 6 inches

*Mean annual air temperature:* 59 to 66 degrees F

*Frost-free period:* 180 to 290 days

*Farmland classification:* Farmland of statewide importance

#### Map Unit Composition

*Cajon and similar soils:* 85 percent

*Minor components:* 15 percent

*Estimates are based on observations, descriptions, and transects of the mapunit.*

#### Description of Cajon

##### Setting

*Landform:* Alluvial fans

*Landform position (two-dimensional):* Backslope

*Landform position (three-dimensional):* Tread

*Down-slope shape:* Linear

*Across-slope shape:* Linear

*Parent material:* Alluvium derived from granite sources

##### Typical profile

*H1 - 0 to 7 inches:* sand

*H2 - 7 to 25 inches:* sand

*H3 - 25 to 45 inches:* gravelly sand

*H4 - 45 to 60 inches:* stratified sand to loamy fine sand

##### Properties and qualities

*Slope:* 0 to 2 percent

*Depth to restrictive feature:* More than 80 inches

*Drainage class:* Somewhat excessively drained

*Capacity of the most limiting layer to transmit water (Ksat):* High to very high (5.95 to 19.98 in/hr)

*Depth to water table:* More than 80 inches

*Frequency of flooding:* None

*Frequency of ponding:* None

*Calcium carbonate, maximum content:* 1 percent

*Available water supply, 0 to 60 inches:* Low (about 4.1 inches)

##### Interpretive groups

*Land capability classification (irrigated):* 3e

*Land capability classification (nonirrigated):* 7e

*Hydrologic Soil Group:* A

*Ecological site:* R030XF012CA - Sandy

*Hydric soil rating:* No

### **Minor Components**

#### **Manet**

*Percent of map unit:* 5 percent

*Landform:* Playas

*Hydric soil rating:* Yes

#### **Kimberlina**

*Percent of map unit:* 5 percent


#### **Helendale**

*Percent of map unit:* 5 percent

## **Data Source Information**


Soil Survey Area: San Bernardino County, California, Mojave River Area  
Survey Area Data: Version 13, Sep 13, 2021

Soil Map—San Bernardino County, California, Mojave River Area  
(Olivera and Pena )

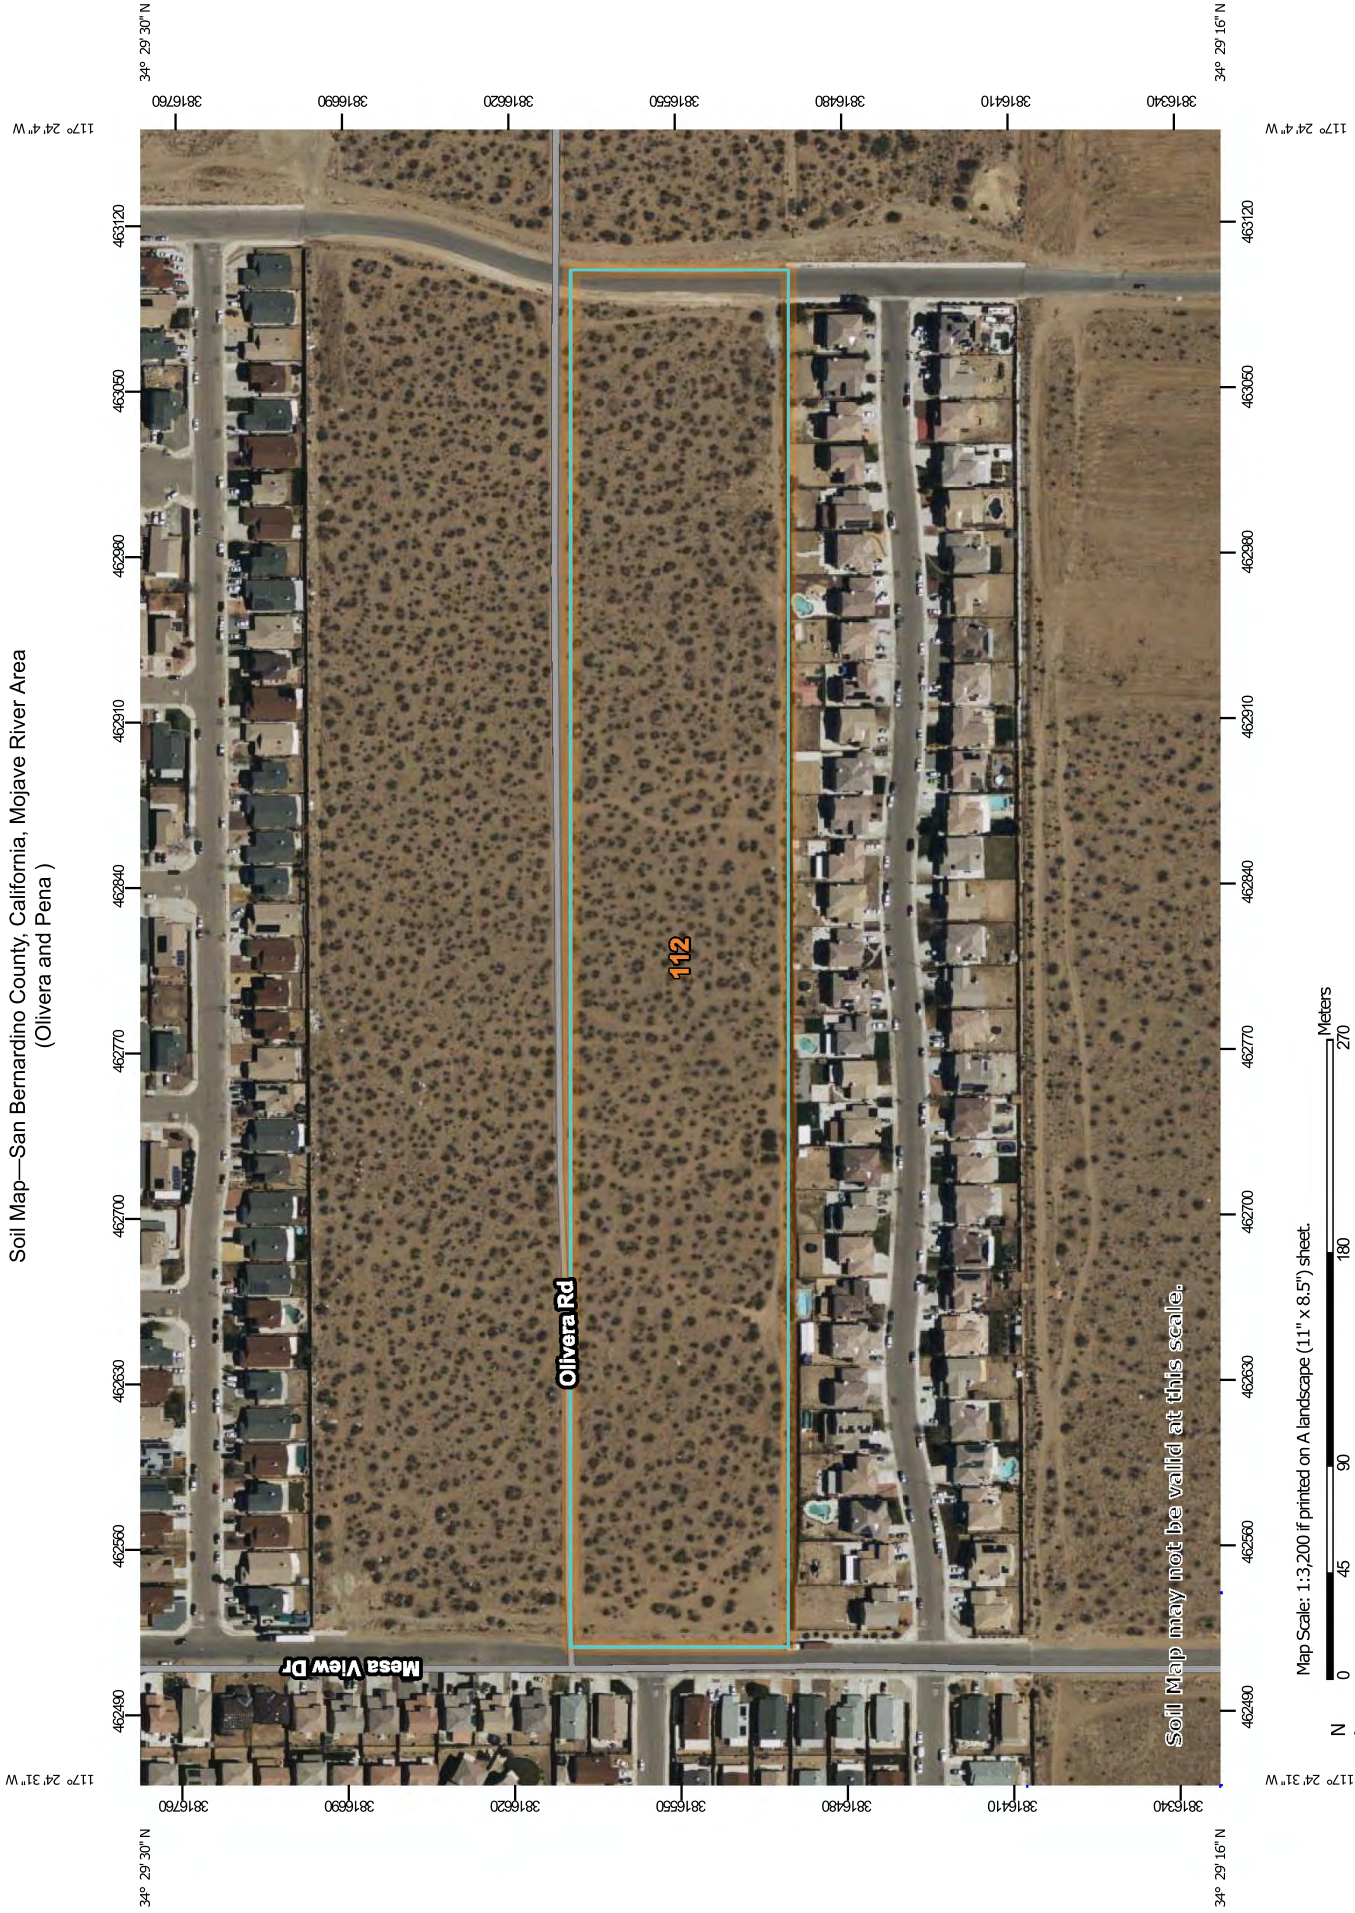

Soil Map may not be valid at this scale.

Map Scale: 1:3,200 if printed on A landscape (11" x 8.5") sheet.



## MAP LEGEND

-  Area of Interest (AOI)
-  Area of Interest (AOI)
- Soils**
-  Soil Map Unit Polygons
-  Soil Map Unit Lines
-  Soil Map Unit Points
- Special Point Features**
-  Blowout
-  Borrow Pit
-  Clay Spot
-  Closed Depression
-  Gravel Pit
-  Gravelly Spot
-  Landfill
-  Lava Flow
-  Marsh or swamp
-  Mine or Quarry
-  Miscellaneous Water
-  Perennial Water
-  Rock Outcrop
-  Saline Spot
-  Sandy Spot
-  Severely Eroded Spot
-  Sinkhole
-  Slide or Slip
-  Sodic Spot

## MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service  
Web Soil Survey URL:  
Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.














Soil Survey Area: San Bernardino County, California, Mojave River Area

Survey Area Data: Version 13, Sep 13, 2021

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Mar 27, 2021—May 24, 2021

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

-  Spoil Area
-  Stony Spot
-  Very Stony Spot
-  Wet Spot
-  Other
-  Special Line Features
- Water Features**
-  Streams and Canals
- Transportation**
-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads
- Background**
-  Aerial Photography

## Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
112	CAJON SAND, 0 TO 2 PERCENT SLOPES	13.2	100.0%
<b>Totals for Area of Interest</b>		<b>13.2</b>	<b>100.0%</b>

San Bernardino County Rational Hydrology Program  
(Hydrology Manual Date - August 1986)

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989-2005  
Version 7.1

Rational Hydrology Study Date: 07/08/22

-----  
Olivera and Pena  
Existing Condition  
10yr  
-----

-----  
Program License Serial Number 6232  
-----

-----  
\*\*\*\*\* Hydrology Study Control Information \*\*\*\*\*  
-----

-----  
Rational hydrology study storm event year is 10.0  
Computed rainfall intensity:  
Storm year = 10.00 1 hour rainfall = 0.692 (In.)  
Slope used for rainfall intensity curve b = 0.7000  
Soil antecedent moisture condition (AMC) = 2

++++  
Process from Point/Station 101.000 to Point/Station  
102.000  
\*\*\*\* INITIAL AREA EVALUATION \*\*\*\*

-----  
UNDEVELOPED (average cover) subarea  
Decimal fraction soil group A = 1.000  
Decimal fraction soil group B = 0.000  
Decimal fraction soil group C = 0.000  
Decimal fraction soil group D = 0.000  
SCS curve number for soil(AMC 2) = 50.00  
Pervious ratio(Ap) = 1.0000 Max loss rate(Fm)= 0.810  
(In/Hr)  
Initial subarea data:  
Initial area flow distance = 1000.000(Ft.)  
Top (of initial area) elevation = 3240.000(Ft.)  
Bottom (of initial area) elevation = 3231.000(Ft.)  
Difference in elevation = 9.000(Ft.)  
Slope = 0.00900 s(%)= 0.90  
TC = k(0.706)\*[(length^3)/(elevation change)]^0.2  
Initial area time of concentration = 28.705 min.  
Rainfall intensity = 1.159(In/Hr) for a 10.0 year storm  
Effective runoff coefficient used for area (Q=KCIA) is C = 0.272  
Subarea runoff = 2.277(CFS)  
Total initial stream area = 7.230(Ac.)

Pervious area fraction = 1.000  
Initial area Fm value = 0.810(In/Hr)

++++  
Process from Point/Station 102.000 to Point/Station  
103.000  
\*\*\*\* IRREGULAR CHANNEL FLOW TRAVEL TIME \*\*\*\*

---

Estimated mean flow rate at midpoint of channel = 0.000(CFS)  
Depth of flow = 0.422(Ft.), Average velocity = 1.858(Ft/s)  
\*\*\*\*\* Irregular Channel Data \*\*\*\*\*

-----  
Information entered for subchannel number 1 :  
Point number 'X' coordinate 'Y' coordinate  
1 0.00 1.00  
2 4.00 0.00  
3 14.00 1.00  
Manning's 'N' friction factor = 0.030

-----  
Sub-Channel flow = 2.313(CFS)  
' ' flow top width = 5.904(Ft.)  
' ' velocity = 1.858(Ft/s)  
' ' area = 1.245(Sq.Ft)  
' ' Froude number = 0.713

Upstream point elevation = 3231.000(Ft.)  
Downstream point elevation = 3220.000(Ft.)  
Flow length = 965.000(Ft.)  
Travel time = 8.66 min.  
Time of concentration = 37.36 min.  
Depth of flow = 0.422(Ft.)  
Average velocity = 1.858(Ft/s)  
Total irregular channel flow = 2.313(CFS)  
Irregular channel normal depth above invert elev. = 0.422(Ft.)  
Average velocity of channel(s) = 1.858(Ft/s)  
Adding area flow to channel

UNDEVELOPED (average cover) subarea  
Decimal fraction soil group A = 1.000  
Decimal fraction soil group B = 0.000  
Decimal fraction soil group C = 0.000  
Decimal fraction soil group D = 0.000  
SCS curve number for soil(AMC 2) = 50.00  
Pervious ratio(Ap) = 1.0000 Max loss rate(Fm)= 0.810

(In/Hr)  
The area added to the existing stream causes a  
a lower flow rate of Q = 2.024(CFS)  
therefore the upstream flow rate of Q = 2.277(CFS) is being  
used

Rainfall intensity = 0.964(In/Hr) for a 10.0 year storm  
Effective runoff coefficient used for area,(total area with  
modified  
rational method)(Q=KCIA) is C = 0.144  
Subarea runoff = 0.000(CFS) for 7.320(Ac.)  
Total runoff = 2.277(CFS)  
Effective area this stream = 14.55(Ac.)  
Total Study Area (Main Stream No. 1) = 14.55(Ac.)  
Area averaged Fm value = 0.810(In/Hr)

Depth of flow = 0.419(Ft.), Average velocity = 1.851(Ft/s)  
End of computations, Total Study Area = 14.55 (Ac.)  
The following figures may  
be used for a unit hydrograph study of the same area.  
Note: These figures do not consider reduced effective area  
effects caused by confluences in the rational equation.

Area averaged pervious area fraction( $A_p$ ) = 1.000  
Area averaged SCS curve number = 50.0



San Bernardino County Rational Hydrology Program

(Hydrology Manual Date - August 1986)

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989-2005  
Version 7.1

Rational Hydrology Study Date: 07/08/22

-----  
Olivera and Pena  
Existing Condition  
100 yr  
-----

-----  
Program License Serial Number 6232  
-----

-----  
\*\*\*\*\* Hydrology Study Control Information \*\*\*\*\*  
-----

-----  
Rational hydrology study storm event year is 100.0  
Computed rainfall intensity:  
Storm year = 100.00 1 hour rainfall = 1.150 (In.)  
Slope used for rainfall intensity curve b = 0.7000  
Soil antecedent moisture condition (AMC) = 3

++++  
++++  
Process from Point/Station 101.000 to Point/Station  
102.000  
\*\*\*\* INITIAL AREA EVALUATION \*\*\*\*  
-----

-----  
UNDEVELOPED (average cover) subarea  
Decimal fraction soil group A = 1.000  
Decimal fraction soil group B = 0.000  
Decimal fraction soil group C = 0.000  
Decimal fraction soil group D = 0.000  
SCS curve number for soil(AMC 2) = 50.00  
Adjusted SCS curve number for AMC 3 = 70.00  
Pervious ratio(Ap) = 1.0000 Max loss rate(Fm)= 0.532  
(In/Hr)  
Initial subarea data:  
Initial area flow distance = 1000.000(Ft.)  
Top (of initial area) elevation = 3240.000(Ft.)  
Bottom (of initial area) elevation = 3231.000(Ft.)  
Difference in elevation = 9.000(Ft.)  
Slope = 0.00900 s(%)= 0.90  
TC = k(0.706)\*[(length^3)/(elevation change)]^0.2  
Initial area time of concentration = 28.705 min.  
Rainfall intensity = 1.927(In/Hr) for a 100.0 year storm  
Effective runoff coefficient used for area (Q=KCIA) is C = 0.651  
Subarea runoff = 9.073(CFS)

Total initial stream area = 7.230(Ac.)  
Pervious area fraction = 1.000  
Initial area Fm value = 0.532(In/Hr)

++++  
Process from Point/Station 102.000 to Point/Station  
103.000  
\*\*\*\* IRREGULAR CHANNEL FLOW TRAVEL TIME \*\*\*\*

-----  
Estimated mean flow rate at midpoint of channel = 0.000(CFS)  
Depth of flow = 0.786(Ft.), Average velocity = 2.815(Ft/s)  
\*\*\*\*\* Irregular Channel Data \*\*\*\*\*

-----  
Information entered for subchannel number 1 :  
Point number 'X' coordinate 'Y' coordinate  
1 0.00 1.00  
2 4.00 0.00  
3 14.00 1.00  
Manning's 'N' friction factor = 0.030

-----  
Sub-Channel flow = 12.187(CFS)  
' ' flow top width = 11.010(Ft.)  
' ' velocity= 2.815(Ft/s)  
' ' area = 4.329(Sq.Ft)  
' ' Froude number = 0.791

Upstream point elevation = 3231.000(Ft.)  
Downstream point elevation = 3220.000(Ft.)  
Flow length = 965.000(Ft.)  
Travel time = 5.71 min.  
Time of concentration = 34.42 min.  
Depth of flow = 0.786(Ft.)  
Average velocity = 2.815(Ft/s)  
Total irregular channel flow = 12.187(CFS)  
Irregular channel normal depth above invert elev. = 0.786(Ft.)  
Average velocity of channel(s) = 2.815(Ft/s)  
Adding area flow to channel

UNDEVELOPED (average cover) subarea  
Decimal fraction soil group A = 1.000  
Decimal fraction soil group B = 0.000  
Decimal fraction soil group C = 0.000  
Decimal fraction soil group D = 0.000  
SCS curve number for soil(AMC 2) = 50.00  
Adjusted SCS curve number for AMC 3 = 70.00  
Pervious ratio(Ap) = 1.0000 Max loss rate(Fm)= 0.532

(In/Hr)  
Rainfall intensity = 1.697(In/Hr) for a 100.0 year storm  
Effective runoff coefficient used for area,(total area with  
modified

rational method)(Q=KCIA) is C = 0.618  
Subarea runoff = 6.175(CFS) for 7.320(Ac.)  
Total runoff = 15.248(CFS)  
Effective area this stream = 14.55(Ac.)  
Total Study Area (Main Stream No. 1) = 14.55(Ac.)  
Area averaged Fm value = 0.532(In/Hr)  
Depth of flow = 0.855(Ft.), Average velocity = 2.977(Ft/s)  
End of computations, Total Study Area = 14.55 (Ac.)

The following figures may  
be used for a unit hydrograph study of the same area.  
Note: These figures do not consider reduced effective area  
effects caused by confluences in the rational equation.

Area averaged pervious area fraction( $A_p$ ) = 1.000  
Area averaged SCS curve number = 50.0



San Bernardino County Rational Hydrology Program  
(Hydrology Manual Date - August 1986)

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989-2005  
Version 7.1

Rational Hydrology Study Date: 07/08/22

-----  
Olivera and Pena  
Proposed Condition  
10 yr  
-----

-----  
Program License Serial Number 6232  
-----

-----  
\*\*\*\*\* Hydrology Study Control Information \*\*\*\*\*  
-----

-----  
Rational hydrology study storm event year is 10.0  
Computed rainfall intensity:  
Storm year = 10.00 1 hour rainfall = 0.692 (In.)  
Slope used for rainfall intensity curve b = 0.7000  
Soil antecedent moisture condition (AMC) = 2

++++  
Process from Point/Station 101.000 to Point/Station  
102.000  
\*\*\*\* INITIAL AREA EVALUATION \*\*\*\*

-----  
RESIDENTIAL(3 - 4 dwl/acre)  
Decimal fraction soil group A = 1.000  
Decimal fraction soil group B = 0.000  
Decimal fraction soil group C = 0.000  
Decimal fraction soil group D = 0.000  
SCS curve number for soil(AMC 2) = 32.00  
Pervious ratio(Ap) = 0.6000 Max loss rate(Fm)= 0.587  
(In/Hr)  
Initial subarea data:  
Initial area flow distance = 1000.000(Ft.)  
Top (of initial area) elevation = 3240.000(Ft.)  
Bottom (of initial area) elevation = 3230.000(Ft.)  
Difference in elevation = 10.000(Ft.)  
Slope = 0.01000 s(%)= 1.00  
TC = k(0.412)\*[(length^3)/(elevation change)]^0.2  
Initial area time of concentration = 16.402 min.  
Rainfall intensity = 1.715(In/Hr) for a 10.0 year storm  
Effective runoff coefficient used for area (Q=KCIA) is C = 0.592  
Subarea runoff = 6.796(CFS)  
Total initial stream area = 6.690(Ac.)

Pervious area fraction = 0.600  
Initial area Fm value = 0.587(In/Hr)

++++  
Process from Point/Station 102.000 to Point/Station  
103.000  
\*\*\*\* STREET FLOW TRAVEL TIME + SUBAREA FLOW ADDITION \*\*\*\*

---

Top of street segment elevation = 3230.000(Ft.)  
End of street segment elevation = 3224.000(Ft.)  
Length of street segment = 904.000(Ft.)  
Height of curb above gutter flowline = 6.0(In.)  
Width of half street (curb to crown) = 18.000(Ft.)  
Distance from crown to crossfall grade break = 16.000(Ft.)  
Slope from gutter to grade break (v/hz) = 0.020  
Slope from grade break to crown (v/hz) = 0.020  
Street flow is on [2] side(s) of the street  
Distance from curb to property line = 12.000(Ft.)  
Slope from curb to property line (v/hz) = 0.030  
Gutter width = 2.000(Ft.)  
Gutter hike from flowline = 2.000(In.)  
Manning's N in gutter = 0.0150  
Manning's N from gutter to grade break = 0.0150  
Manning's N from grade break to crown = 0.0150  
Estimated mean flow rate at midpoint of street = 8.426(CFS)  
Depth of flow = 0.396(Ft.), Average velocity = 2.174(Ft/s)  
Streetflow hydraulics at midpoint of street travel:  
Halfstreet flow width = 13.459(Ft.)  
Flow velocity = 2.17(Ft/s)  
Travel time = 6.93 min. TC = 23.33 min.  
Adding area flow to street  
RESIDENTIAL(3 - 4 dwl/acre)  
Decimal fraction soil group A = 1.000  
Decimal fraction soil group B = 0.000  
Decimal fraction soil group C = 0.000  
Decimal fraction soil group D = 0.000  
SCS curve number for soil(AMC 2) = 32.00  
Pervious ratio(Ap) = 0.6000 Max loss rate(Fm)= 0.587

(In/Hr)  
Rainfall intensity = 1.340(In/Hr) for a 10.0 year storm  
Effective runoff coefficient used for area,(total area with  
modified  
rational method)(Q=KCIA) is C = 0.506  
Subarea runoff = 3.073(CFS) for 7.860(Ac.)  
Total runoff = 9.870(CFS)  
Effective area this stream = 14.55(Ac.)  
Total Study Area (Main Stream No. 1) = 14.55(Ac.)  
Area averaged Fm value = 0.587(In/Hr)  
Street flow at end of street = 9.870(CFS)  
Half street flow at end of street = 4.935(CFS)  
Depth of flow = 0.414(Ft.), Average velocity = 2.258(Ft/s)  
Flow width (from curb towards crown)= 14.349(Ft.)  
End of computations, Total Study Area = 14.55 (Ac.)  
The following figures may  
be used for a unit hydrograph study of the same area.  
Note: These figures do not consider reduced effective area  
effects caused by confluences in the rational equation.

Area averaged pervious area fraction( $A_p$ ) = 0.600  
Area averaged SCS curve number = 32.0



San Bernardino County Rational Hydrology Program  
(Hydrology Manual Date - August 1986)

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989-2005  
Version 7.1

Rational Hydrology Study Date: 07/08/22

-----  
Olivera and Pena  
Proposed Condition  
100 year  
-----

-----  
Program License Serial Number 6232  
-----

-----  
\*\*\*\*\* Hydrology Study Control Information \*\*\*\*\*  
-----

-----  
Rational hydrology study storm event year is 100.0  
Computed rainfall intensity:  
Storm year = 100.00 1 hour rainfall = 1.150 (In.)  
Slope used for rainfall intensity curve b = 0.7000  
Soil antecedent moisture condition (AMC) = 3

++++  
++++  
Process from Point/Station 101.000 to Point/Station  
102.000  
\*\*\*\* INITIAL AREA EVALUATION \*\*\*\*

-----  
RESIDENTIAL(3 - 4 dwl/acre)  
Decimal fraction soil group A = 1.000  
Decimal fraction soil group B = 0.000  
Decimal fraction soil group C = 0.000  
Decimal fraction soil group D = 0.000  
SCS curve number for soil(AMC 2) = 32.00  
Adjusted SCS curve number for AMC 3 = 52.00  
Pervious ratio(Ap) = 0.6000 Max loss rate(Fm)= 0.471  
(In/Hr)  
Initial subarea data:  
Initial area flow distance = 1000.000(Ft.)  
Top (of initial area) elevation = 3240.000(Ft.)  
Bottom (of initial area) elevation = 3230.000(Ft.)  
Difference in elevation = 10.000(Ft.)  
Slope = 0.01000 s(%)= 1.00  
TC = k(0.412)\*[(length^3)/(elevation change)]^0.2  
Initial area time of concentration = 16.402 min.  
Rainfall intensity = 2.851(In/Hr) for a 100.0 year storm  
Effective runoff coefficient used for area (Q=KCIA) is C = 0.751  
Subarea runoff = 14.329(CFS)

Total initial stream area = 6.690(Ac.)  
Pervious area fraction = 0.600  
Initial area Fm value = 0.471(In/Hr)

++++  
Process from Point/Station 102.000 to Point/Station  
103.000  
\*\*\*\* STREET FLOW TRAVEL TIME + SUBAREA FLOW ADDITION \*\*\*\*

---

Top of street segment elevation = 3230.000(Ft.)  
End of street segment elevation = 3224.000(Ft.)  
Length of street segment = 904.000(Ft.)  
Height of curb above gutter flowline = 6.0(In.)  
Width of half street (curb to crown) = 18.000(Ft.)  
Distance from crown to crossfall grade break = 16.000(Ft.)  
Slope from gutter to grade break (v/hz) = 0.020  
Slope from grade break to crown (v/hz) = 0.020  
Street flow is on [2] side(s) of the street  
Distance from curb to property line = 12.000(Ft.)  
Slope from curb to property line (v/hz) = 0.030  
Gutter width = 2.000(Ft.)  
Gutter hike from flowline = 2.000(In.)  
Manning's N in gutter = 0.0150  
Manning's N from gutter to grade break = 0.0150  
Manning's N from grade break to crown = 0.0150  
Estimated mean flow rate at midpoint of street = 19.355(CFS)  
Depth of flow = 0.499(Ft.), Average velocity = 2.701(Ft/s)  
Note: depth of flow exceeds top of street crown.  
Streetflow hydraulics at midpoint of street travel:  
Halfstreet flow width = 18.000(Ft.)  
Flow velocity = 2.70(Ft/s)  
Travel time = 5.58 min. TC = 21.98 min.  
Adding area flow to street  
RESIDENTIAL(3 - 4 dwl/acre)  
Decimal fraction soil group A = 1.000  
Decimal fraction soil group B = 0.000  
Decimal fraction soil group C = 0.000  
Decimal fraction soil group D = 0.000  
SCS curve number for soil(AMC 2) = 32.00  
Adjusted SCS curve number for AMC 3 = 52.00  
Pervious ratio(Ap) = 0.6000 Max loss rate(Fm) = 0.471

(In/Hr)  
Rainfall intensity = 2.323(In/Hr) for a 100.0 year storm  
Effective runoff coefficient used for area, (total area with  
modified  
rational method)(Q=KCIA) is C = 0.717  
Subarea runoff = 9.917(CFS) for 7.860(Ac.)  
Total runoff = 24.246(CFS)  
Effective area this stream = 14.55(Ac.)  
Total Study Area (Main Stream No. 1) = 14.55(Ac.)  
Area averaged Fm value = 0.471(In/Hr)  
Street flow at end of street = 24.246(CFS)  
Half street flow at end of street = 12.123(CFS)  
Depth of flow = 0.532(Ft.), Average velocity = 2.891(Ft/s)  
Warning: depth of flow exceeds top of curb  
Note: depth of flow exceeds top of street crown.  
Distance that curb overflow reaches into property = 1.06(Ft.)

Flow width (from curb towards crown)= 18.000(Ft.)  
End of computations, Total Study Area = 14.55 (Ac.)  
The following figures may  
be used for a unit hydrograph study of the same area.  
Note: These figures do not consider reduced effective area  
effects caused by confluences in the rational equation.

Area averaged pervious area fraction( $A_p$ ) = 0.600  
Area averaged SCS curve number = 32.0

Unit Hydrograph Analysis

Copyright (c) CIVILCADD/CIVILDESIGN, 1989 - 2004, Version

7.0

Study date 07/08/22

++++++  
-----  
-----

San Bernardino County Synthetic Unit Hydrology Method  
Manual date - August 1986

Program License Serial Number 6232

-----  
---  
Olivera and Pena  
Proposed Condition  
100 yr  
-----  
--

Storm Event Year = 100

Antecedent Moisture Condition = 3

English (in-lb) Input Units Used

English Rainfall Data (Inches) Input Values Used

English Units used in output format

Area averaged rainfall intensity isohyetal data:

Sub-Area (Ac.)	Duration (hours)	Isohyetal (In)
Rainfall data for year 100		
14.55	1	1.15

-----  
--  
Rainfall data for year 100  
14.55 6 2.51  
-----

--  
Rainfall data for year 100  
14.55 24 5.41  
-----

-----  
++

\*\*\*\*\* Area-averaged max loss rate, Fm \*\*\*\*\*

Fm	SCS curve No.(AMCII) (In/Hr)	SCS curve NO.(AMC 3)	Area (Ac.)	Area Fraction	Fp(Fig C6) (In/Hr)	Ap (dec.)
0.471	32.0	52.0	14.55	1.000	0.785	0.600

Area-averaged adjusted loss rate Fm (In/Hr) = 0.471

\*\*\*\*\* Area-Averaged low loss rate fraction, Yb \*\*\*\*\*

Area (Ac.)	Area Fract	SCS CN (AMC2)	SCS CN (AMC3)	S	Pervious Yield Fr
8.73	0.600	32.0	52.0	9.23	0.183
5.82	0.400	98.0	98.0	0.20	0.956

Area-averaged catchment yield fraction, Y = 0.493

Area-averaged low loss fraction, Yb = 0.507

User entry of time of concentration = 0.425 (hours)

+++++

++

Watershed area = 14.55(Ac.)  
 Catchment Lag time = 0.340 hours  
 Unit interval = 5.000 minutes  
 Unit interval percentage of lag time = 24.5098  
 Hydrograph baseflow = 0.00(CFS)  
 Average maximum watershed loss rate(Fm) = 0.471(In/Hr)  
 Average low loss rate fraction (Yb) = 0.507 (decimal)  
 DESERT S-Graph Selected  
 Computed peak 5-minute rainfall = 0.546(In)  
 Computed peak 30-minute rainfall = 0.934(In)  
 Specified peak 1-hour rainfall = 1.150(In)  
 Computed peak 3-hour rainfall = 1.856(In)  
 Specified peak 6-hour rainfall = 2.510(In)  
 Specified peak 24-hour rainfall = 5.410(In)

Rainfall depth area reduction factors:

Using a total area of 14.55(Ac.) (Ref: fig. E-4)

5-minute factor = 0.999	Adjusted rainfall = 0.545(In)
30-minute factor = 0.999	Adjusted rainfall = 0.933(In)
1-hour factor = 0.999	Adjusted rainfall = 1.149(In)
3-hour factor = 1.000	Adjusted rainfall = 1.856(In)
6-hour factor = 1.000	Adjusted rainfall = 2.510(In)
24-hour factor = 1.000	Adjusted rainfall = 5.410(In)

---

Unit Hydrograph

+++++

+++

Interval Number	'S' Graph Mean values	Unit Hydrograph ((CFS))
--------------------	--------------------------	----------------------------

---

(K = 175.96 (CFS))

1	1.314	2.312
2	6.356	8.873
3	18.675	21.676
4	40.035	37.586
5	55.063	26.445
6	64.261	16.184
7	70.664	11.268
8	75.535	8.572
9	79.389	6.781
10	82.438	5.365
11	85.000	4.509
12	87.240	3.941
13	89.068	3.218
14	90.526	2.565
15	91.851	2.332
16	93.011	2.041
17	94.037	1.806
18	94.883	1.488
19	95.677	1.396
20	96.326	1.144
21	96.928	1.059
22	97.385	0.804
23	97.796	0.722
24	98.060	0.465
25	98.312	0.443
26	98.600	0.508
27	98.894	0.518
28	99.188	0.518
29	99.469	0.494
30	99.644	0.308
31	99.797	0.270
32	100.000	0.135

---

Peak Unit Number	Adjusted mass rainfall (In)	Unit rainfall (In)
1	0.5453	0.5453
2	0.6714	0.1260
3	0.7582	0.0868
4	0.8265	0.0683
5	0.8838	0.0572
6	0.9335	0.0497
7	0.9776	0.0442
8	1.0176	0.0400
9	1.0542	0.0366
10	1.0880	0.0339
11	1.1196	0.0316
12	1.1492	0.0296
13	1.1900	0.0408
14	1.2291	0.0391
15	1.2667	0.0375
16	1.3029	0.0362
17	1.3378	0.0349
18	1.3715	0.0338
19	1.4043	0.0327
20	1.4360	0.0318
21	1.4669	0.0309
22	1.4970	0.0301
23	1.5263	0.0293

24	1.5549	0.0286
25	1.5828	0.0279
26	1.6101	0.0273
27	1.6369	0.0267
28	1.6630	0.0262
29	1.6887	0.0256
30	1.7138	0.0252
31	1.7385	0.0247
32	1.7628	0.0242
33	1.7866	0.0238
34	1.8100	0.0234
35	1.8330	0.0230
36	1.8557	0.0227
37	1.8780	0.0223
38	1.8999	0.0219
39	1.9215	0.0216
40	1.9428	0.0213
41	1.9639	0.0210
42	1.9846	0.0207
43	2.0050	0.0204
44	2.0252	0.0202
45	2.0451	0.0199
46	2.0648	0.0197
47	2.0843	0.0194
48	2.1035	0.0192
49	2.1224	0.0190
50	2.1412	0.0188
51	2.1598	0.0186
52	2.1781	0.0183
53	2.1963	0.0182
54	2.2142	0.0180
55	2.2320	0.0178
56	2.2496	0.0176
57	2.2670	0.0174
58	2.2842	0.0172
59	2.3013	0.0171
60	2.3182	0.0169
61	2.3350	0.0168
62	2.3516	0.0166
63	2.3680	0.0165
64	2.3843	0.0163
65	2.4005	0.0162
66	2.4165	0.0160
67	2.4324	0.0159
68	2.4482	0.0158
69	2.4638	0.0156
70	2.4793	0.0155
71	2.4946	0.0154
72	2.5099	0.0152
73	2.5291	0.0193
74	2.5483	0.0191
75	2.5673	0.0190
76	2.5862	0.0189
77	2.6050	0.0188
78	2.6237	0.0187
79	2.6423	0.0186
80	2.6607	0.0185
81	2.6791	0.0184
82	2.6974	0.0183
83	2.7156	0.0182

84	2.7336	0.0181
85	2.7516	0.0180
86	2.7695	0.0179
87	2.7873	0.0178
88	2.8050	0.0177
89	2.8226	0.0176
90	2.8401	0.0175
91	2.8576	0.0174
92	2.8749	0.0174
93	2.8922	0.0173
94	2.9094	0.0172
95	2.9265	0.0171
96	2.9435	0.0170
97	2.9605	0.0169
98	2.9773	0.0169
99	2.9941	0.0168
100	3.0109	0.0167
101	3.0275	0.0166
102	3.0441	0.0166
103	3.0606	0.0165
104	3.0770	0.0164
105	3.0933	0.0164
106	3.1096	0.0163
107	3.1259	0.0162
108	3.1420	0.0162
109	3.1581	0.0161
110	3.1741	0.0160
111	3.1901	0.0160
112	3.2059	0.0159
113	3.2218	0.0158
114	3.2375	0.0158
115	3.2532	0.0157
116	3.2689	0.0156
117	3.2845	0.0156
118	3.3000	0.0155
119	3.3155	0.0155
120	3.3309	0.0154
121	3.3462	0.0153
122	3.3615	0.0153
123	3.3767	0.0152
124	3.3919	0.0152
125	3.4070	0.0151
126	3.4221	0.0151
127	3.4371	0.0150
128	3.4521	0.0150
129	3.4670	0.0149
130	3.4819	0.0149
131	3.4967	0.0148
132	3.5115	0.0148
133	3.5262	0.0147
134	3.5408	0.0147
135	3.5554	0.0146
136	3.5700	0.0146
137	3.5845	0.0145
138	3.5990	0.0145
139	3.6134	0.0144
140	3.6278	0.0144
141	3.6421	0.0143
142	3.6564	0.0143
143	3.6707	0.0142

144	3.6849	0.0142
145	3.6990	0.0142
146	3.7131	0.0141
147	3.7272	0.0141
148	3.7412	0.0140
149	3.7552	0.0140
150	3.7691	0.0139
151	3.7830	0.0139
152	3.7969	0.0139
153	3.8107	0.0138
154	3.8245	0.0138
155	3.8382	0.0137
156	3.8519	0.0137
157	3.8656	0.0137
158	3.8792	0.0136
159	3.8928	0.0136
160	3.9063	0.0135
161	3.9199	0.0135
162	3.9333	0.0135
163	3.9468	0.0134
164	3.9602	0.0134
165	3.9735	0.0134
166	3.9868	0.0133
167	4.0001	0.0133
168	4.0134	0.0133
169	4.0266	0.0132
170	4.0398	0.0132
171	4.0529	0.0131
172	4.0660	0.0131
173	4.0791	0.0131
174	4.0922	0.0130
175	4.1052	0.0130
176	4.1181	0.0130
177	4.1311	0.0129
178	4.1440	0.0129
179	4.1569	0.0129
180	4.1697	0.0128
181	4.1826	0.0128
182	4.1953	0.0128
183	4.2081	0.0128
184	4.2208	0.0127
185	4.2335	0.0127
186	4.2462	0.0127
187	4.2588	0.0126
188	4.2714	0.0126
189	4.2840	0.0126
190	4.2965	0.0125
191	4.3090	0.0125
192	4.3215	0.0125
193	4.3340	0.0125
194	4.3464	0.0124
195	4.3588	0.0124
196	4.3712	0.0124
197	4.3835	0.0123
198	4.3958	0.0123
199	4.4081	0.0123
200	4.4204	0.0123
201	4.4326	0.0122
202	4.4448	0.0122
203	4.4570	0.0122

204	4.4691	0.0121
205	4.4812	0.0121
206	4.4933	0.0121
207	4.5054	0.0121
208	4.5175	0.0120
209	4.5295	0.0120
210	4.5415	0.0120
211	4.5534	0.0120
212	4.5654	0.0119
213	4.5773	0.0119
214	4.5892	0.0119
215	4.6011	0.0119
216	4.6129	0.0118
217	4.6247	0.0118
218	4.6365	0.0118
219	4.6483	0.0118
220	4.6600	0.0117
221	4.6718	0.0117
222	4.6835	0.0117
223	4.6951	0.0117
224	4.7068	0.0117
225	4.7184	0.0116
226	4.7300	0.0116
227	4.7416	0.0116
228	4.7532	0.0116
229	4.7647	0.0115
230	4.7762	0.0115
231	4.7877	0.0115
232	4.7992	0.0115
233	4.8106	0.0114
234	4.8221	0.0114
235	4.8335	0.0114
236	4.8448	0.0114
237	4.8562	0.0114
238	4.8675	0.0113
239	4.8789	0.0113
240	4.8902	0.0113
241	4.9014	0.0113
242	4.9127	0.0113
243	4.9239	0.0112
244	4.9352	0.0112
245	4.9463	0.0112
246	4.9575	0.0112
247	4.9687	0.0112
248	4.9798	0.0111
249	4.9909	0.0111
250	5.0020	0.0111
251	5.0131	0.0111
252	5.0241	0.0111
253	5.0352	0.0110
254	5.0462	0.0110
255	5.0572	0.0110
256	5.0682	0.0110
257	5.0791	0.0110
258	5.0901	0.0109
259	5.1010	0.0109
260	5.1119	0.0109
261	5.1228	0.0109
262	5.1336	0.0109
263	5.1445	0.0108

264	5.1553	0.0108
265	5.1661	0.0108
266	5.1769	0.0108
267	5.1877	0.0108
268	5.1984	0.0108
269	5.2092	0.0107
270	5.2199	0.0107
271	5.2306	0.0107
272	5.2413	0.0107
273	5.2519	0.0107
274	5.2626	0.0106
275	5.2732	0.0106
276	5.2838	0.0106
277	5.2944	0.0106
278	5.3050	0.0106
279	5.3156	0.0106
280	5.3261	0.0105
281	5.3367	0.0105
282	5.3472	0.0105
283	5.3577	0.0105
284	5.3681	0.0105
285	5.3786	0.0105
286	5.3891	0.0104
287	5.3995	0.0104
288	5.4099	0.0104

Unit Period (number)	Unit Rainfall (In)	Unit Soil-Loss (In)	Effective Rainfall (In)
1	0.0104	0.0053	0.0051
2	0.0104	0.0053	0.0051
3	0.0105	0.0053	0.0052
4	0.0105	0.0053	0.0052
5	0.0105	0.0053	0.0052
6	0.0105	0.0053	0.0052
7	0.0106	0.0054	0.0052
8	0.0106	0.0054	0.0052
9	0.0106	0.0054	0.0052
10	0.0106	0.0054	0.0052
11	0.0107	0.0054	0.0053
12	0.0107	0.0054	0.0053
13	0.0107	0.0054	0.0053
14	0.0107	0.0054	0.0053
15	0.0108	0.0055	0.0053
16	0.0108	0.0055	0.0053
17	0.0108	0.0055	0.0053
18	0.0108	0.0055	0.0053
19	0.0109	0.0055	0.0054
20	0.0109	0.0055	0.0054
21	0.0109	0.0056	0.0054
22	0.0110	0.0056	0.0054
23	0.0110	0.0056	0.0054
24	0.0110	0.0056	0.0054
25	0.0111	0.0056	0.0054
26	0.0111	0.0056	0.0055
27	0.0111	0.0056	0.0055
28	0.0111	0.0057	0.0055

29	0.0112	0.0057	0.0055
30	0.0112	0.0057	0.0055
31	0.0112	0.0057	0.0055
32	0.0113	0.0057	0.0055
33	0.0113	0.0057	0.0056
34	0.0113	0.0057	0.0056
35	0.0114	0.0058	0.0056
36	0.0114	0.0058	0.0056
37	0.0114	0.0058	0.0056
38	0.0114	0.0058	0.0056
39	0.0115	0.0058	0.0057
40	0.0115	0.0058	0.0057
41	0.0116	0.0059	0.0057
42	0.0116	0.0059	0.0057
43	0.0116	0.0059	0.0057
44	0.0117	0.0059	0.0057
45	0.0117	0.0059	0.0058
46	0.0117	0.0059	0.0058
47	0.0118	0.0060	0.0058
48	0.0118	0.0060	0.0058
49	0.0118	0.0060	0.0058
50	0.0119	0.0060	0.0058
51	0.0119	0.0060	0.0059
52	0.0119	0.0061	0.0059
53	0.0120	0.0061	0.0059
54	0.0120	0.0061	0.0059
55	0.0121	0.0061	0.0059
56	0.0121	0.0061	0.0060
57	0.0121	0.0062	0.0060
58	0.0122	0.0062	0.0060
59	0.0122	0.0062	0.0060
60	0.0123	0.0062	0.0060
61	0.0123	0.0062	0.0061
62	0.0123	0.0063	0.0061
63	0.0124	0.0063	0.0061
64	0.0124	0.0063	0.0061
65	0.0125	0.0063	0.0061
66	0.0125	0.0063	0.0062
67	0.0126	0.0064	0.0062
68	0.0126	0.0064	0.0062
69	0.0127	0.0064	0.0062
70	0.0127	0.0064	0.0063
71	0.0128	0.0065	0.0063
72	0.0128	0.0065	0.0063
73	0.0128	0.0065	0.0063
74	0.0129	0.0065	0.0063
75	0.0129	0.0066	0.0064
76	0.0130	0.0066	0.0064
77	0.0130	0.0066	0.0064
78	0.0131	0.0066	0.0064
79	0.0131	0.0067	0.0065
80	0.0132	0.0067	0.0065
81	0.0133	0.0067	0.0065
82	0.0133	0.0067	0.0065
83	0.0134	0.0068	0.0066
84	0.0134	0.0068	0.0066
85	0.0135	0.0068	0.0066
86	0.0135	0.0069	0.0067
87	0.0136	0.0069	0.0067
88	0.0136	0.0069	0.0067

89	0.0137	0.0070	0.0067
90	0.0137	0.0070	0.0068
91	0.0138	0.0070	0.0068
92	0.0139	0.0070	0.0068
93	0.0139	0.0071	0.0069
94	0.0140	0.0071	0.0069
95	0.0141	0.0071	0.0069
96	0.0141	0.0072	0.0070
97	0.0142	0.0072	0.0070
98	0.0142	0.0072	0.0070
99	0.0143	0.0073	0.0071
100	0.0144	0.0073	0.0071
101	0.0145	0.0073	0.0071
102	0.0145	0.0074	0.0072
103	0.0146	0.0074	0.0072
104	0.0147	0.0074	0.0072
105	0.0148	0.0075	0.0073
106	0.0148	0.0075	0.0073
107	0.0149	0.0076	0.0073
108	0.0150	0.0076	0.0074
109	0.0151	0.0076	0.0074
110	0.0151	0.0077	0.0075
111	0.0152	0.0077	0.0075
112	0.0153	0.0078	0.0075
113	0.0154	0.0078	0.0076
114	0.0155	0.0078	0.0076
115	0.0156	0.0079	0.0077
116	0.0156	0.0079	0.0077
117	0.0158	0.0080	0.0078
118	0.0158	0.0080	0.0078
119	0.0160	0.0081	0.0079
120	0.0160	0.0081	0.0079
121	0.0162	0.0082	0.0080
122	0.0162	0.0082	0.0080
123	0.0164	0.0083	0.0081
124	0.0164	0.0083	0.0081
125	0.0166	0.0084	0.0082
126	0.0166	0.0084	0.0082
127	0.0168	0.0085	0.0083
128	0.0169	0.0086	0.0083
129	0.0170	0.0086	0.0084
130	0.0171	0.0087	0.0084
131	0.0173	0.0088	0.0085
132	0.0174	0.0088	0.0085
133	0.0175	0.0089	0.0086
134	0.0176	0.0089	0.0087
135	0.0178	0.0090	0.0088
136	0.0179	0.0091	0.0088
137	0.0181	0.0092	0.0089
138	0.0182	0.0092	0.0090
139	0.0184	0.0093	0.0091
140	0.0185	0.0094	0.0091
141	0.0187	0.0095	0.0092
142	0.0188	0.0095	0.0093
143	0.0190	0.0097	0.0094
144	0.0191	0.0097	0.0094
145	0.0152	0.0077	0.0075
146	0.0154	0.0078	0.0076
147	0.0156	0.0079	0.0077
148	0.0158	0.0080	0.0078

149	0.0160	0.0081	0.0079
150	0.0162	0.0082	0.0080
151	0.0165	0.0083	0.0081
152	0.0166	0.0084	0.0082
153	0.0169	0.0086	0.0083
154	0.0171	0.0087	0.0084
155	0.0174	0.0088	0.0086
156	0.0176	0.0089	0.0087
157	0.0180	0.0091	0.0088
158	0.0182	0.0092	0.0089
159	0.0186	0.0094	0.0091
160	0.0188	0.0095	0.0092
161	0.0192	0.0097	0.0095
162	0.0194	0.0099	0.0096
163	0.0199	0.0101	0.0098
164	0.0202	0.0102	0.0099
165	0.0207	0.0105	0.0102
166	0.0210	0.0107	0.0104
167	0.0216	0.0110	0.0107
168	0.0219	0.0111	0.0108
169	0.0227	0.0115	0.0112
170	0.0230	0.0117	0.0113
171	0.0238	0.0121	0.0117
172	0.0242	0.0123	0.0119
173	0.0252	0.0128	0.0124
174	0.0256	0.0130	0.0126
175	0.0267	0.0136	0.0132
176	0.0273	0.0139	0.0135
177	0.0286	0.0145	0.0141
178	0.0293	0.0149	0.0144
179	0.0309	0.0157	0.0152
180	0.0318	0.0161	0.0156
181	0.0338	0.0171	0.0166
182	0.0349	0.0177	0.0172
183	0.0375	0.0191	0.0185
184	0.0391	0.0198	0.0193
185	0.0296	0.0150	0.0146
186	0.0316	0.0160	0.0155
187	0.0366	0.0186	0.0180
188	0.0400	0.0203	0.0197
189	0.0497	0.0252	0.0245
190	0.0572	0.0290	0.0282
191	0.0868	0.0393	0.0476
192	0.1260	0.0393	0.0868
193	0.5453	0.0393	0.5061
194	0.0683	0.0347	0.0337
195	0.0442	0.0224	0.0218
196	0.0339	0.0172	0.0167
197	0.0408	0.0207	0.0201
198	0.0362	0.0184	0.0178
199	0.0327	0.0166	0.0161
200	0.0301	0.0153	0.0148
201	0.0279	0.0142	0.0138
202	0.0262	0.0133	0.0129
203	0.0247	0.0125	0.0122
204	0.0234	0.0119	0.0115
205	0.0223	0.0113	0.0110
206	0.0213	0.0108	0.0105
207	0.0204	0.0104	0.0101
208	0.0197	0.0100	0.0097

209	0.0190	0.0096	0.0093
210	0.0183	0.0093	0.0090
211	0.0178	0.0090	0.0088
212	0.0172	0.0087	0.0085
213	0.0168	0.0085	0.0083
214	0.0163	0.0083	0.0080
215	0.0159	0.0081	0.0078
216	0.0155	0.0079	0.0076
217	0.0193	0.0098	0.0095
218	0.0189	0.0096	0.0093
219	0.0186	0.0094	0.0092
220	0.0183	0.0093	0.0090
221	0.0180	0.0091	0.0089
222	0.0177	0.0090	0.0087
223	0.0174	0.0088	0.0086
224	0.0172	0.0087	0.0085
225	0.0169	0.0086	0.0083
226	0.0167	0.0085	0.0082
227	0.0165	0.0084	0.0081
228	0.0163	0.0083	0.0080
229	0.0161	0.0082	0.0079
230	0.0159	0.0081	0.0078
231	0.0157	0.0080	0.0077
232	0.0155	0.0079	0.0076
233	0.0153	0.0078	0.0076
234	0.0152	0.0077	0.0075
235	0.0150	0.0076	0.0074
236	0.0149	0.0075	0.0073
237	0.0147	0.0075	0.0072
238	0.0146	0.0074	0.0072
239	0.0144	0.0073	0.0071
240	0.0143	0.0073	0.0070
241	0.0142	0.0072	0.0070
242	0.0140	0.0071	0.0069
243	0.0139	0.0071	0.0068
244	0.0138	0.0070	0.0068
245	0.0137	0.0069	0.0067
246	0.0135	0.0069	0.0067
247	0.0134	0.0068	0.0066
248	0.0133	0.0068	0.0066
249	0.0132	0.0067	0.0065
250	0.0131	0.0067	0.0065
251	0.0130	0.0066	0.0064
252	0.0129	0.0066	0.0064
253	0.0128	0.0065	0.0063
254	0.0127	0.0065	0.0063
255	0.0126	0.0064	0.0062
256	0.0125	0.0064	0.0062
257	0.0125	0.0063	0.0061
258	0.0124	0.0063	0.0061
259	0.0123	0.0062	0.0061
260	0.0122	0.0062	0.0060
261	0.0121	0.0062	0.0060
262	0.0120	0.0061	0.0059
263	0.0120	0.0061	0.0059
264	0.0119	0.0060	0.0059
265	0.0118	0.0060	0.0058
266	0.0117	0.0060	0.0058
267	0.0117	0.0059	0.0058
268	0.0116	0.0059	0.0057

269	0.0115	0.0059	0.0057
270	0.0115	0.0058	0.0056
271	0.0114	0.0058	0.0056
272	0.0113	0.0058	0.0056
273	0.0113	0.0057	0.0056
274	0.0112	0.0057	0.0055
275	0.0112	0.0057	0.0055
276	0.0111	0.0056	0.0055
277	0.0110	0.0056	0.0054
278	0.0110	0.0056	0.0054
279	0.0109	0.0055	0.0054
280	0.0109	0.0055	0.0054
281	0.0108	0.0055	0.0053
282	0.0108	0.0055	0.0053
283	0.0107	0.0054	0.0053
284	0.0106	0.0054	0.0052
285	0.0106	0.0054	0.0052
286	0.0105	0.0054	0.0052
287	0.0105	0.0053	0.0052
288	0.0104	0.0053	0.0051

-----  
 --  
 -----  
 --  
 Total soil rain loss = 2.48(In)  
 Total effective rainfall = 2.93(In)  
 Peak flow rate in flood hydrograph = 24.28(CFS)  
 -----

-----  
 +++  
 ++  
 24 - H O U R S T O R M  
 R u n o f f H y d r o g r a p h  
 -----

--  
 Hydrograph in 5 Minute intervals ((CFS))  
 -----

--  
 Time(h+m) Volume Ac.Ft Q(CFS) 0 7.5 15.0 22.5  
 30.0  
 -----

0+ 5	0.0001	0.01	Q			
0+10	0.0005	0.06	Q			
0+15	0.0016	0.17	Q			
0+20	0.0041	0.36	Q			
0+25	0.0076	0.50	Q			
0+30	0.0116	0.58	Q			
0+35	0.0160	0.64	Q			
0+40	0.0207	0.69	Q			
0+45	0.0257	0.72	Q			

0+50	0.0309	0.75	VQ			
0+55	0.0362	0.78	VQ			
1+ 0	0.0418	0.80	VQ			
1+ 5	0.0474	0.82	VQ			
1+10	0.0531	0.83	VQ			
1+15	0.0590	0.85	VQ			
1+20	0.0649	0.86	VQ			
1+25	0.0709	0.87	VQ			
1+30	0.0769	0.88	VQ			
1+35	0.0831	0.89	VQ			
1+40	0.0893	0.90	Q			
1+45	0.0955	0.91	Q			
1+50	0.1018	0.91	Q			
1+55	0.1081	0.92	Q			
2+ 0	0.1145	0.92	Q			
2+ 5	0.1209	0.93	Q			
2+10	0.1273	0.93	Q			
2+15	0.1337	0.94	Q			
2+20	0.1402	0.94	Q			
2+25	0.1468	0.95	Q			
2+30	0.1533	0.95	Q			
2+35	0.1599	0.96	Q			
2+40	0.1665	0.96	Q			
2+45	0.1731	0.96	Q			
2+50	0.1798	0.96	QV			
2+55	0.1864	0.97	QV			
3+ 0	0.1931	0.97	QV			
3+ 5	0.1998	0.97	QV			
3+10	0.2065	0.98	QV			
3+15	0.2133	0.98	QV			

3+20	0.2200	0.98	QV			
3+25	0.2268	0.98	QV			
3+30	0.2336	0.99	QV			
3+35	0.2404	0.99	QV			
3+40	0.2472	0.99	QV			
3+45	0.2541	0.99	QV			
3+50	0.2609	1.00	QV			
3+55	0.2678	1.00	Q V			
4+ 0	0.2747	1.00	Q V			
4+ 5	0.2817	1.01	Q V			
4+10	0.2886	1.01	Q V			
4+15	0.2956	1.01	Q V			
4+20	0.3026	1.02	Q V			
4+25	0.3096	1.02	Q V			
4+30	0.3167	1.02	Q V			
4+35	0.3237	1.02	Q V			
4+40	0.3308	1.03	Q V			
4+45	0.3379	1.03	Q V			
4+50	0.3450	1.03	Q V			
4+55	0.3522	1.04	Q V			
5+ 0	0.3593	1.04	Q V			
5+ 5	0.3665	1.04	Q V			
5+10	0.3738	1.05	Q V			
5+15	0.3810	1.05	Q V			
5+20	0.3883	1.06	Q V			
5+25	0.3956	1.06	Q V			
5+30	0.4029	1.06	Q V			
5+35	0.4102	1.07	Q V			
5+40	0.4176	1.07	Q V			
5+45	0.4250	1.07	Q V			

5+50	0.4324	1.08	Q	V			
5+55	0.4398	1.08	Q	V			
6+ 0	0.4473	1.08	Q	V			
6+ 5	0.4548	1.09	Q	V			
6+10	0.4623	1.09	Q	V			
6+15	0.4698	1.10	Q	V			
6+20	0.4774	1.10	Q	V			
6+25	0.4850	1.10	Q	V			
6+30	0.4927	1.11	Q	V			
6+35	0.5003	1.11	Q	V			
6+40	0.5080	1.12	Q	V			
6+45	0.5157	1.12	Q	V			
6+50	0.5235	1.12	Q	V			
6+55	0.5312	1.13	Q	V			
7+ 0	0.5391	1.13	Q	V			
7+ 5	0.5469	1.14	Q	V			
7+10	0.5548	1.14	Q	V			
7+15	0.5627	1.15	Q	V			
7+20	0.5706	1.15	Q	V			
7+25	0.5786	1.16	Q	V			
7+30	0.5865	1.16	Q	V			
7+35	0.5946	1.17	Q	V			
7+40	0.6026	1.17	Q	V			
7+45	0.6107	1.18	Q	V			
7+50	0.6189	1.18	Q	V			
7+55	0.6270	1.19	Q	V			
8+ 0	0.6352	1.19	Q	V			
8+ 5	0.6435	1.20	Q	V			
8+10	0.6517	1.20	Q	V			
8+15	0.6601	1.21	Q	V			

8+20	0.6684	1.21	Q	v			
8+25	0.6768	1.22	Q	v			
8+30	0.6852	1.22	Q	v			
8+35	0.6937	1.23	Q	v			
8+40	0.7022	1.23	Q	v			
8+45	0.7107	1.24	Q	v			
8+50	0.7193	1.25	Q	v			
8+55	0.7279	1.25	Q	v			
9+ 0	0.7366	1.26	Q	v			
9+ 5	0.7453	1.27	Q	v			
9+10	0.7541	1.27	Q	v			
9+15	0.7629	1.28	Q	v			
9+20	0.7717	1.28	Q	v			
9+25	0.7806	1.29	Q	v			
9+30	0.7896	1.30	Q	v			
9+35	0.7986	1.30	Q	v			
9+40	0.8076	1.31	Q	v			
9+45	0.8167	1.32	Q	v			
9+50	0.8258	1.33	Q	v			
9+55	0.8350	1.33	Q	v			
10+ 0	0.8442	1.34	Q	v			
10+ 5	0.8535	1.35	Q	v			
10+10	0.8629	1.36	Q	v			
10+15	0.8723	1.36	Q	v			
10+20	0.8817	1.37	Q	v			
10+25	0.8912	1.38	Q	v			
10+30	0.9008	1.39	Q	v			
10+35	0.9104	1.40	Q	v			
10+40	0.9201	1.41	Q	v			
10+45	0.9299	1.42	Q	v			

10+50	0.9397	1.43	Q	v		
10+55	0.9496	1.43	Q	v		
11+ 0	0.9595	1.44	Q	v		
11+ 5	0.9696	1.45	Q	v		
11+10	0.9796	1.46	Q	v		
11+15	0.9898	1.47	Q	v		
11+20	1.0000	1.49	Q	v		
11+25	1.0103	1.50	Q	v		
11+30	1.0207	1.51	Q	v		
11+35	1.0312	1.52	Q	v		
11+40	1.0417	1.53	Q	v		
11+45	1.0523	1.54	Q	v		
11+50	1.0630	1.55	Q	v		
11+55	1.0738	1.57	Q	v		
12+ 0	1.0847	1.58	Q	v		
12+ 5	1.0956	1.59	Q	v		
12+10	1.1065	1.58	Q	v		
12+15	1.1172	1.55	Q	v		
12+20	1.1275	1.49	Q	v		
12+25	1.1375	1.45	Q	v		
12+30	1.1474	1.43	Q	v		
12+35	1.1572	1.43	Q	v		
12+40	1.1670	1.43	Q	v		
12+45	1.1769	1.43	Q	v		
12+50	1.1867	1.44	Q	v		
12+55	1.1967	1.44	Q	v		
13+ 0	1.2067	1.45	Q	v		
13+ 5	1.2168	1.47	Q	v		
13+10	1.2270	1.48	Q	v		
13+15	1.2373	1.50	Q	v		

13+20	1.2478	1.52	Q		V		
13+25	1.2583	1.53	Q		V		
13+30	1.2691	1.56	Q		V		
13+35	1.2799	1.58	Q		V		
13+40	1.2909	1.60	Q		V		
13+45	1.3021	1.63	Q		V		
13+50	1.3135	1.65	Q		V		
13+55	1.3251	1.68	Q		V		
14+ 0	1.3369	1.71	Q		V		
14+ 5	1.3489	1.74	Q		V		
14+10	1.3611	1.78	Q		V		
14+15	1.3736	1.81	Q		V		
14+20	1.3864	1.85	Q		V		
14+25	1.3994	1.89	Q		V		
14+30	1.4128	1.94	Q		V		
14+35	1.4264	1.98	Q		V		
14+40	1.4405	2.04	Q		V		
14+45	1.4549	2.09	Q		V		
14+50	1.4697	2.15	Q		V		
14+55	1.4849	2.22	Q		V		
15+ 0	1.5007	2.29	Q		V		
15+ 5	1.5170	2.36	Q		V		
15+10	1.5339	2.45	Q		V		
15+15	1.5514	2.55	Q		V		
15+20	1.5697	2.65	Q		V		
15+25	1.5887	2.76	Q		V		
15+30	1.6083	2.84	Q		V		
15+35	1.6280	2.86	Q		V		
15+40	1.6473	2.81	Q		V		
15+45	1.6669	2.85	Q		V		

15+50	1.6877	3.02	Q		v	
15+55	1.7107	3.33	Q		v	
16+ 0	1.7378	3.93	Q		v	
16+ 5	1.7790	5.99	Q		v	
16+10	1.8508	10.42		Q	v	
16+15	1.9707	17.42			vQ	
16+20	2.1379	24.28			v	Q
16+25	2.2637	18.25			QV	
16+30	2.3511	12.69		Q	v	
16+35	2.4188	9.84		Q	v	
16+40	2.4757	8.26		Q	v	
16+45	2.5249	7.13	Q		v	
16+50	2.5676	6.20	Q		v	
16+55	2.6058	5.55	Q		v	
17+ 0	2.6406	5.05	Q		v	
17+ 5	2.6716	4.51	Q		v	
17+10	2.6993	4.03	Q		v	
17+15	2.7252	3.76	Q		v	
17+20	2.7493	3.49	Q		v	
17+25	2.7716	3.24	Q		v	
17+30	2.7921	2.98	Q		v	
17+35	2.8116	2.83	Q		v	
17+40	2.8296	2.61	Q		v	
17+45	2.8466	2.47	Q		v	
17+50	2.8622	2.27	Q		v	
17+55	2.8770	2.14	Q		v	
18+ 0	2.8905	1.96	Q		v	
18+ 5	2.9036	1.90	Q		v	
18+10	2.9167	1.90	Q		v	
18+15	2.9298	1.90	Q		v	

18+20	2.9430	1.93	Q			V
18+25	2.9562	1.91	Q			V
18+30	2.9686	1.81	Q			V
18+35	2.9807	1.76	Q			V
18+40	2.9922	1.67	Q			V
18+45	3.0031	1.58	Q			V
18+50	3.0138	1.56	Q			V
18+55	3.0244	1.54	Q			V
19+ 0	3.0349	1.52	Q			V
19+ 5	3.0452	1.50	Q			V
19+10	3.0553	1.48	Q			V
19+15	3.0654	1.46	Q			V
19+20	3.0753	1.44	Q			V
19+25	3.0851	1.42	Q			V
19+30	3.0948	1.41	Q			V
19+35	3.1044	1.39	Q			V
19+40	3.1139	1.38	Q			V
19+45	3.1232	1.36	Q			V
19+50	3.1325	1.35	Q			V
19+55	3.1417	1.33	Q			V
20+ 0	3.1508	1.32	Q			V
20+ 5	3.1597	1.30	Q			V
20+10	3.1686	1.29	Q			V
20+15	3.1774	1.28	Q			V
20+20	3.1861	1.27	Q			V
20+25	3.1948	1.25	Q			V
20+30	3.2033	1.24	Q			V
20+35	3.2118	1.23	Q			V
20+40	3.2202	1.22	Q			V
20+45	3.2285	1.21	Q			V

20+50	3.2368	1.20	Q				V
20+55	3.2450	1.19	Q				V
21+ 0	3.2531	1.18	Q				V
21+ 5	3.2611	1.17	Q				V
21+10	3.2691	1.16	Q				V
21+15	3.2770	1.15	Q				V
21+20	3.2848	1.14	Q				V
21+25	3.2926	1.13	Q				V
21+30	3.3003	1.12	Q				V
21+35	3.3080	1.11	Q				V
21+40	3.3156	1.10	Q				V
21+45	3.3231	1.10	Q				V
21+50	3.3306	1.09	Q				V
21+55	3.3381	1.08	Q				V
22+ 0	3.3455	1.07	Q				V
22+ 5	3.3528	1.07	Q				V
22+10	3.3601	1.06	Q				V
22+15	3.3674	1.05	Q				V
22+20	3.3746	1.04	Q				V
22+25	3.3817	1.04	Q				V
22+30	3.3888	1.03	Q				V
22+35	3.3959	1.03	Q				V
22+40	3.4029	1.02	Q				V
22+45	3.4099	1.01	Q				V
22+50	3.4168	1.01	Q				V
22+55	3.4237	1.00	Q				V
23+ 0	3.4305	0.99	Q				V
23+ 5	3.4373	0.99	Q				V
23+10	3.4441	0.98	Q				V
23+15	3.4508	0.98	Q				V

	23+20	3.4575	0.97	Q				V
	23+25	3.4642	0.97	Q				
V	23+30	3.4708	0.96	Q				
V	23+35	3.4774	0.96	Q				
V	23+40	3.4840	0.95	Q				
V	23+45	3.4905	0.95	Q				
V	23+50	3.4970	0.94	Q				
V	23+55	3.5034	0.94	Q				
V	24+ 0	3.5098	0.93	Q				
V	24+ 5	3.5162	0.92	Q				
V	24+10	3.5221	0.87	Q				
V	24+15	3.5273	0.75	Q				
V	24+20	3.5311	0.55	Q				
V	24+25	3.5340	0.42	Q				
V	24+30	3.5362	0.33	Q				
V	24+35	3.5381	0.27	Q				
V	24+40	3.5397	0.23	Q				
V	24+45	3.5410	0.19	Q				
V	24+50	3.5421	0.16	Q				
V	24+55	3.5431	0.14	Q				
V	25+ 0	3.5439	0.12	Q				
V	25+ 5	3.5446	0.10	Q				
V	25+10	3.5452	0.09	Q				
V	25+15	3.5457	0.07	Q				
V	25+20	3.5461	0.06	Q				
V	25+25	3.5465	0.05	Q				
V	25+30	3.5468	0.05	Q				
V	25+35	3.5471	0.04	Q				
V	25+40	3.5473	0.03	Q				
V	25+45	3.5475	0.03	Q				

V	25+50	3.5476	0.02	Q			
V	25+55	3.5478	0.02	Q			
V	26+ 0	3.5479	0.02	Q			
V	26+ 5	3.5480	0.01	Q			
V	26+10	3.5481	0.01	Q			
V	26+15	3.5481	0.01	Q			
V	26+20	3.5482	0.01	Q			
V	26+25	3.5482	0.00	Q			
V	26+30	3.5482	0.00	Q			
V	26+35	3.5482	0.00	Q			
V							

---

FLOOD HYDROGRAPH ROUTING PROGRAM  
Copyright (c) CIVILCADD/CIVILDESIGN, 1989 - 2012  
Study date: 07/08/22

-----  
Olivera & Pena  
100 yr 24hr  
Basin Routing  
Run 3  
-----

--  
Program License Serial Number 6232  
-----

--  
\*\*\*\*\* HYDROGRAPH INFORMATION  
\*\*\*\*\*

From study/file name: oliverapro.rte  
\*\*\*\*\*HYDROGRAPH  
DATA\*\*\*\*\*  
Number of intervals = 319  
Time interval = 5.0 (Min.)  
Maximum/Peak flow rate = 24.278 (CFS)  
Total volume = 3.548 (Ac.Ft)  
Status of hydrographs being held in storage  
Stream 1 Stream 2 Stream 3 Stream 4 Stream 5  
Peak (CFS) 0.000 0.000 0.000 0.000  
0.000  
Vol (Ac.Ft) 0.000 0.000 0.000 0.000  
0.000  
\*\*\*\*\*  
\*\*\*\*\*

++++  
Process from Point/Station 103.000 to Point/Station  
104.000  
\*\*\*\* RETARDING BASIN ROUTING \*\*\*\*  
-----

-----  
User entry of depth-outflow-storage data  
-----

--  
Total number of inflow hydrograph intervals = 319  
Hydrograph time unit = 5.000 (Min.)  
Initial depth in storage basin = 0.00(Ft.)  
-----  
--

--  
 Initial basin depth = 0.00 (Ft.)  
 Initial basin storage = 0.00 (Ac.Ft)  
 Initial basin outflow = 0.00 (CFS)  
 -----

-----  
 --  
 Depth vs. Storage and Depth vs. Discharge data:  
 Basin Depth    Storage        Outflow        (S-O\*dt/2)        (S+O\*dt/2)  
           (Ft.)        (Ac.Ft)        (CFS)        (Ac.Ft)        (Ac.Ft)  
 -----

0.000	0.000	0.000	0.000	0.000
1.000	0.253	0.720	0.251	0.255
2.000	0.536	0.720	0.534	0.538
3.000	0.850	0.720	0.848	0.852
4.000	1.200	13.725	1.153	1.247

-----

--  
 Hydrograph Detention Basin Routing  
 -----

Graph values: 'I'= unit inflow; 'O'=outflow at time shown  
 -----

Time Depth (Hours) (Ft.)	Inflow (CFS)	Outflow (CFS)	Storage (Ac.Ft)	.0	6.1	12.14	18.21	24.28
0.083	0.01	0.00	0.000	O				
0.167	0.06	0.00	0.000	O				
0.250	0.17	0.00	0.001	O				
0.333	0.36	0.01	0.003	O				
0.417	0.50	0.02	0.006	O				
0.500	0.58	0.03	0.009	O				
0.583	0.64	0.04	0.013	O				
0.667	0.69	0.05	0.018	O				
0.750	0.72	0.06	0.022	O				
0.833	0.75	0.08	0.027	O				
0.917	0.78	0.09	0.031	OI				
1.000	0.80	0.10	0.036	OI				
1.083	0.82	0.12	0.041	OI				
1.167	0.83	0.13	0.046	OI				
1.250	0.85	0.14	0.051	OI				

0.20									
1.333	0.86	0.16	0.055	OI					
0.22									
1.417	0.87	0.17	0.060	OI					
0.24									
1.500	0.88	0.19	0.065	OI					
0.26									
1.583	0.89	0.20	0.070	OI					
0.28									
1.667	0.90	0.21	0.075	OI					
0.29									
1.750	0.91	0.23	0.079	OI					
0.31									
1.833	0.91	0.24	0.084	OI					
0.33									
1.917	0.92	0.25	0.089	OI					
0.35									
2.000	0.92	0.27	0.093	OI					
0.37									
2.083	0.93	0.28	0.098	OI					
0.39									
2.167	0.93	0.29	0.102	OI					
0.40									
2.250	0.94	0.30	0.106	OI					
0.42									
2.333	0.94	0.32	0.111	OI					
0.44									
2.417	0.95	0.33	0.115	OI					
0.46									
2.500	0.95	0.34	0.119	OI					
0.47									
2.583	0.96	0.35	0.124	OI					
0.49									
2.667	0.96	0.36	0.128	OI					
0.50									
2.750	0.96	0.37	0.132	OI					
0.52									
2.833	0.96	0.39	0.136	OI					
0.54									
2.917	0.97	0.40	0.140	OI					
0.55									
3.000	0.97	0.41	0.144	OI					
0.57									
3.083	0.97	0.42	0.147	OI					
0.58									
3.167	0.98	0.43	0.151	OI					
0.60									
3.250	0.98	0.44	0.155	OI					
0.61									
3.333	0.98	0.45	0.159	OI					
0.63									
3.417	0.98	0.46	0.162	OI					
0.64									
3.500	0.99	0.47	0.166	OI					
0.66									
3.583	0.99	0.48	0.169	OI					
0.67									
3.667	0.99	0.49	0.173	OI					
0.68									
3.750	0.99	0.50	0.176	OI					

0.70									
3.833	1.00	0.51	0.180	OI					
0.71									
3.917	1.00	0.52	0.183	OI					
0.72									
4.000	1.00	0.53	0.186	OI					
0.74									
4.083	1.01	0.54	0.189	OI					
0.75									
4.167	1.01	0.55	0.193	OI					
0.76									
4.250	1.01	0.56	0.196	OI					
0.77									
4.333	1.02	0.57	0.199	OI					
0.79									
4.417	1.02	0.57	0.202	OI					
0.80									
4.500	1.02	0.58	0.205	OI					
0.81									
4.583	1.02	0.59	0.208	OI					
0.82									
4.667	1.03	0.60	0.211	OI					
0.83									
4.750	1.03	0.61	0.214	OI					
0.85									
4.833	1.03	0.62	0.217	OI					
0.86									
4.917	1.04	0.63	0.220	OI					
0.87									
5.000	1.04	0.63	0.223	OI					
0.88									
5.083	1.04	0.64	0.225	OI					
0.89									
5.167	1.05	0.65	0.228	OI					
0.90									
5.250	1.05	0.66	0.231	OI					
0.91									
5.333	1.06	0.66	0.233	OI					
0.92									
5.417	1.06	0.67	0.236	OI					
0.93									
5.500	1.06	0.68	0.239	OI					
0.94									
5.583	1.07	0.69	0.241	OI					
0.95									
5.667	1.07	0.69	0.244	OI					
0.96									
5.750	1.07	0.70	0.247	OI					
0.97									
5.833	1.08	0.71	0.249	OI					
0.98									
5.917	1.08	0.72	0.252	OI					
0.99									
6.000	1.08	0.72	0.254	OI					
1.00									
6.083	1.09	0.72	0.257	OI					
1.01									
6.167	1.09	0.72	0.259	OI					
1.02									
6.250	1.10	0.72	0.262	OI					

1.03									
6.333	1.10	0.72	0.264	OI					
1.04									
6.417	1.10	0.72	0.267	OI					
1.05									
6.500	1.11	0.72	0.270	OI					
1.06									
6.583	1.11	0.72	0.272	OI					
1.07									
6.667	1.12	0.72	0.275	OI					
1.08									
6.750	1.12	0.72	0.278	OI					
1.09									
6.833	1.12	0.72	0.281	OI					
1.10									
6.917	1.13	0.72	0.283	OI					
1.11									
7.000	1.13	0.72	0.286	OI					
1.12									
7.083	1.14	0.72	0.289	OI					
1.13									
7.167	1.14	0.72	0.292	OI					
1.14									
7.250	1.15	0.72	0.295	OI					
1.15									
7.333	1.15	0.72	0.298	OI					
1.16									
7.417	1.16	0.72	0.301	OI					
1.17									
7.500	1.16	0.72	0.304	OI					
1.18									
7.583	1.17	0.72	0.307	OI					
1.19									
7.667	1.17	0.72	0.310	OI					
1.20									
7.750	1.18	0.72	0.313	OI					
1.21									
7.833	1.18	0.72	0.316	OI					
1.22									
7.917	1.19	0.72	0.320	OI					
1.24									
8.000	1.19	0.72	0.323	OI					
1.25									
8.083	1.20	0.72	0.326	OI					
1.26									
8.167	1.20	0.72	0.329	OI					
1.27									
8.250	1.21	0.72	0.333	OI					
1.28									
8.333	1.21	0.72	0.336	OI					
1.29									
8.417	1.22	0.72	0.339	OI					
1.31									
8.500	1.22	0.72	0.343	OI					
1.32									
8.583	1.23	0.72	0.346	OI					
1.33									
8.667	1.23	0.72	0.350	OI					
1.34									
8.750	1.24	0.72	0.353	OI					

1.35									
8.833	1.25	0.72	0.357	OI					
1.37									
8.917	1.25	0.72	0.361	OI					
1.38									
9.000	1.26	0.72	0.364	OI					
1.39									
9.083	1.27	0.72	0.368	OI					
1.41									
9.167	1.27	0.72	0.372	OI					
1.42									
9.250	1.28	0.72	0.376	OI					
1.43									
9.333	1.28	0.72	0.380	OI					
1.45									
9.417	1.29	0.72	0.383	OI					
1.46									
9.500	1.30	0.72	0.387	OI					
1.48									
9.583	1.30	0.72	0.391	OI					
1.49									
9.667	1.31	0.72	0.396	OI					
1.50									
9.750	1.32	0.72	0.400	OI					
1.52									
9.833	1.33	0.72	0.404	OI					
1.53									
9.917	1.33	0.72	0.408	OI					
1.55									
10.000	1.34	0.72	0.412	OI					
1.56									
10.083	1.35	0.72	0.417	OI					
1.58									
10.167	1.36	0.72	0.421	OI					
1.59									
10.250	1.36	0.72	0.425	OI					
1.61									
10.333	1.37	0.72	0.430	OI					
1.62									
10.417	1.38	0.72	0.434	OI					
1.64									
10.500	1.39	0.72	0.439	OI					
1.66									
10.583	1.40	0.72	0.444	OI					
1.67									
10.667	1.41	0.72	0.448	OI					
1.69									
10.750	1.42	0.72	0.453	OI					
1.71									
10.833	1.43	0.72	0.458	OI					
1.72									
10.917	1.43	0.72	0.463	OI					
1.74									
11.000	1.44	0.72	0.468	OI					
1.76									
11.083	1.45	0.72	0.473	OI					
1.78									
11.167	1.46	0.72	0.478	OI					
1.79									
11.250	1.47	0.72	0.483	OI					

1.81									
11.333	1.49	0.72	0.488	OI					
1.83									
11.417	1.50	0.72	0.493	OI					
1.85									
11.500	1.51	0.72	0.499	OI					
1.87									
11.583	1.52	0.72	0.504	O I					
1.89									
11.667	1.53	0.72	0.510	O I					
1.91									
11.750	1.54	0.72	0.515	O I					
1.93									
11.833	1.55	0.72	0.521	O I					
1.95									
11.917	1.57	0.72	0.527	O I					
1.97									
12.000	1.58	0.72	0.533	O I					
1.99									
12.083	1.59	0.72	0.539	O I					
2.01									
12.167	1.58	0.72	0.545	O I					
2.03									
12.250	1.55	0.72	0.551	O I					
2.05									
12.333	1.49	0.72	0.556	OI					
2.06									
12.417	1.45	0.72	0.561	OI					
2.08									
12.500	1.43	0.72	0.566	OI					
2.10									
12.583	1.43	0.72	0.571	OI					
2.11									
12.667	1.43	0.72	0.576	OI					
2.13									
12.750	1.43	0.72	0.581	OI					
2.14									
12.833	1.44	0.72	0.586	OI					
2.16									
12.917	1.44	0.72	0.591	OI					
2.17									
13.000	1.45	0.72	0.596	OI					
2.19									
13.083	1.47	0.72	0.601	OI					
2.21									
13.167	1.48	0.72	0.606	OI					
2.22									
13.250	1.50	0.72	0.611	OI					
2.24									
13.333	1.52	0.72	0.617	OI					
2.26									
13.417	1.53	0.72	0.622	O I					
2.28									
13.500	1.56	0.72	0.628	O I					
2.29									
13.583	1.58	0.72	0.634	O I					
2.31									
13.667	1.60	0.72	0.640	O I					
2.33									
13.750	1.63	0.72	0.646	O I					

2.35									
13.833	1.65	0.72	0.652	O I					
2.37									
13.917	1.68	0.72	0.659	O I					
2.39									
14.000	1.71	0.72	0.666	O I					
2.41									
14.083	1.74	0.72	0.673	O I					
2.43									
14.167	1.78	0.72	0.680	O I					
2.46									
14.250	1.81	0.72	0.687	O I					
2.48									
14.333	1.85	0.72	0.695	O I					
2.51									
14.417	1.89	0.72	0.703	O I					
2.53									
14.500	1.94	0.72	0.711	O I					
2.56									
14.583	1.98	0.72	0.719	O I					
2.58									
14.667	2.04	0.72	0.728	O I					
2.61									
14.750	2.09	0.72	0.738	O I					
2.64									
14.833	2.15	0.72	0.747	O I					
2.67									
14.917	2.22	0.72	0.757	O I					
2.70									
15.000	2.29	0.72	0.768	O I					
2.74									
15.083	2.36	0.72	0.779	O I					
2.77									
15.167	2.45	0.72	0.791	O I					
2.81									
15.250	2.55	0.72	0.803	O I					
2.85									
15.333	2.65	0.72	0.816	O I					
2.89									
15.417	2.76	0.72	0.829	O I					
2.93									
15.500	2.84	0.72	0.844	O I					
2.98									
15.583	2.86	1.00	0.858	O I					
3.02									
15.667	2.81	1.42	0.869	O I					
3.05									
15.750	2.85	1.74	0.877	OI					
3.08									
15.833	3.02	2.01	0.885	OI					
3.10									
15.917	3.33	2.27	0.892	O I					
3.12									
16.000	3.93	2.58	0.900	O I					
3.14									
16.083	5.99	3.12	0.915	O I					
3.18									
16.167	10.42	4.28	0.946	O		I			
3.27									
16.250	17.42	6.46	1.005	O		I			

3.44										
16.333	24.28	9.73	1.092				O			I
3.69										
16.417	18.25	12.34	1.163					O	I	
3.89										
16.500	12.69	13.05	1.182					IO		
3.95										
16.583	9.84	12.65	1.171				I	O		
3.92										
16.667	8.26	11.83	1.149				I	O		
3.85										
16.750	7.13	10.89	1.124				I	O		
3.78										
16.833	6.20	9.93	1.098				I	O		
3.71										
16.917	5.55	9.01	1.073				I	O		
3.64										
17.000	5.05	8.17	1.051				I	O		
3.57										
17.083	4.51	7.40	1.030				I	O		
3.51										
17.167	4.03	6.69	1.011				I	O		
3.46										
17.250	3.76	6.06	0.994				I	O		
3.41										
17.333	3.49	5.50	0.979				I	O		
3.37										
17.417	3.24	5.02	0.966				I	O		
3.33										
17.500	2.98	4.59	0.954				I	O		
3.30										
17.583	2.83	4.20	0.944				I	O		
3.27										
17.667	2.61	3.87	0.935				I	O		
3.24										
17.750	2.47	3.57	0.927				IO			
3.22										
17.833	2.27	3.29	0.919				I	O		
3.20										
17.917	2.14	3.05	0.913				I	O		
3.18										
18.000	1.96	2.82	0.907				IO			
3.16										
18.083	1.90	2.62	0.901				IO			
3.15										
18.167	1.90	2.46	0.897				IO			
3.13										
18.250	1.90	2.33	0.893				IO			
3.12										
18.333	1.93	2.24	0.891				O			
3.12										
18.417	1.91	2.16	0.889				O			
3.11										
18.500	1.81	2.09	0.887				O			
3.11										
18.583	1.76	2.02	0.885				O			
3.10										
18.667	1.67	1.95	0.883				O			
3.09										
18.750	1.58	1.88	0.881				O			

3.09									
18.833	1.56	1.81	0.879	O					
3.08									
18.917	1.54	1.75	0.878	O					
3.08									
19.000	1.52	1.70	0.876	IO					
3.08									
19.083	1.50	1.66	0.875	IO					
3.07									
19.167	1.48	1.62	0.874	IO					
3.07									
19.250	1.46	1.58	0.873	IO					
3.07									
19.333	1.44	1.55	0.872	IO					
3.06									
19.417	1.42	1.53	0.872	IO					
3.06									
19.500	1.41	1.50	0.871	O					
3.06									
19.583	1.39	1.48	0.870	O					
3.06									
19.667	1.38	1.46	0.870	O					
3.06									
19.750	1.36	1.44	0.869	O					
3.06									
19.833	1.35	1.42	0.869	O					
3.05									
19.917	1.33	1.40	0.868	O					
3.05									
20.000	1.32	1.38	0.868	O					
3.05									
20.083	1.30	1.37	0.867	O					
3.05									
20.167	1.29	1.35	0.867	O					
3.05									
20.250	1.28	1.34	0.867	O					
3.05									
20.333	1.27	1.32	0.866	O					
3.05									
20.417	1.25	1.31	0.866	O					
3.05									
20.500	1.24	1.29	0.865	O					
3.04									
20.583	1.23	1.28	0.865	O					
3.04									
20.667	1.22	1.27	0.865	O					
3.04									
20.750	1.21	1.26	0.864	O					
3.04									
20.833	1.20	1.24	0.864	O					
3.04									
20.917	1.19	1.23	0.864	O					
3.04									
21.000	1.18	1.22	0.863	O					
3.04									
21.083	1.17	1.21	0.863	O					
3.04									
21.167	1.16	1.20	0.863	O					
3.04									
21.250	1.15	1.19	0.863	O					

3.04									
21.333	1.14	1.18	0.862	O					
3.04									
21.417	1.13	1.17	0.862	O					
3.03									
21.500	1.12	1.16	0.862	O					
3.03									
21.583	1.11	1.15	0.862	O					
3.03									
21.667	1.10	1.14	0.861	O					
3.03									
21.750	1.10	1.13	0.861	O					
3.03									
21.833	1.09	1.12	0.861	O					
3.03									
21.917	1.08	1.11	0.861	O					
3.03									
22.000	1.07	1.11	0.860	O					
3.03									
22.083	1.07	1.10	0.860	O					
3.03									
22.167	1.06	1.09	0.860	O					
3.03									
22.250	1.05	1.08	0.860	O					
3.03									
22.333	1.04	1.07	0.860	O					
3.03									
22.417	1.04	1.07	0.859	O					
3.03									
22.500	1.03	1.06	0.859	O					
3.03									
22.583	1.03	1.05	0.859	O					
3.03									
22.667	1.02	1.05	0.859	O					
3.03									
22.750	1.01	1.04	0.859	O					
3.02									
22.833	1.01	1.03	0.858	O					
3.02									
22.917	1.00	1.03	0.858	O					
3.02									
23.000	0.99	1.02	0.858	O					
3.02									
23.083	0.99	1.01	0.858	O					
3.02									
23.167	0.98	1.01	0.858	O					
3.02									
23.250	0.98	1.00	0.858	O					
3.02									
23.333	0.97	1.00	0.857	O					
3.02									
23.417	0.97	0.99	0.857	O					
3.02									
23.500	0.96	0.98	0.857	O					
3.02									
23.583	0.96	0.98	0.857	O					
3.02									
23.667	0.95	0.97	0.857	O					
3.02									
23.750	0.95	0.97	0.857	O					

3.02									
23.833	0.94	0.96	0.857	O					
3.02									
23.917	0.94	0.96	0.856	O					
3.02									
24.000	0.93	0.95	0.856	O					
3.02									
24.083	0.92	0.95	0.856	O					
3.02									
24.167	0.87	0.93	0.856	O					
3.02									
24.250	0.75	0.90	0.855	IO					
3.01									
24.333	0.55	0.85	0.853	IO					
3.01									
24.417	0.42	0.77	0.851	IO					
3.00									
24.500	0.33	0.72	0.849	O					
3.00									
24.583	0.27	0.72	0.846	O					
2.99									
24.667	0.23	0.72	0.843	O					
2.98									
24.750	0.19	0.72	0.839	O					
2.97									
24.833	0.16	0.72	0.835	O					
2.95									
24.917	0.14	0.72	0.831	O					
2.94									
25.000	0.12	0.72	0.827	O					
2.93									
25.083	0.10	0.72	0.823	O					
2.91									
25.167	0.09	0.72	0.819	O					
2.90									
25.250	0.07	0.72	0.814	O					
2.89									
25.333	0.06	0.72	0.810	O					
2.87									
25.417	0.05	0.72	0.805	O					
2.86									
25.500	0.05	0.72	0.801	O					
2.84									
25.583	0.04	0.72	0.796	O					
2.83									
25.667	0.03	0.72	0.791	O					
2.81									
25.750	0.03	0.72	0.787	O					
2.80									
25.833	0.02	0.72	0.782	O					
2.78									
25.917	0.02	0.72	0.777	O					
2.77									
26.000	0.02	0.72	0.772	O					
2.75									
26.083	0.01	0.72	0.767	O					
2.74									
26.167	0.01	0.72	0.762	O					
2.72									
26.250	0.01	0.72	0.758	O					

2.71									
26.333	0.01	0.72	0.753	o					
2.69									
26.417	0.00	0.72	0.748	o					
2.67									
26.500	0.00	0.72	0.743	o					
2.66									
26.583	0.00	0.72	0.738	o					
2.64									
26.667	0.00	0.72	0.733	o					
2.63									
26.750	0.00	0.72	0.728	o					
2.61									
26.833	0.00	0.72	0.723	o					
2.60									
26.917	0.00	0.72	0.718	o					
2.58									
27.000	0.00	0.72	0.713	o					
2.56									
27.083	0.00	0.72	0.708	o					
2.55									
27.167	0.00	0.72	0.703	o					
2.53									
27.250	0.00	0.72	0.698	o					
2.52									
27.333	0.00	0.72	0.693	o					
2.50									
27.417	0.00	0.72	0.688	o					
2.48									
27.500	0.00	0.72	0.683	o					
2.47									
27.583	0.00	0.72	0.678	o					
2.45									
27.667	0.00	0.72	0.673	o					
2.44									
27.750	0.00	0.72	0.668	o					
2.42									
27.833	0.00	0.72	0.663	o					
2.41									
27.917	0.00	0.72	0.658	o					
2.39									
28.000	0.00	0.72	0.654	o					
2.37									
28.083	0.00	0.72	0.649	o					
2.36									
28.167	0.00	0.72	0.644	o					
2.34									
28.250	0.00	0.72	0.639	o					
2.33									
28.333	0.00	0.72	0.634	o					
2.31									
28.417	0.00	0.72	0.629	o					
2.30									
28.500	0.00	0.72	0.624	o					
2.28									
28.583	0.00	0.72	0.619	o					
2.26									
28.667	0.00	0.72	0.614	o					
2.25									
28.750	0.00	0.72	0.609	o					

2.23									
28.833	0.00	0.72	0.604	o					
2.22									
28.917	0.00	0.72	0.599	o					
2.20									
29.000	0.00	0.72	0.594	o					
2.18									
29.083	0.00	0.72	0.589	o					
2.17									
29.167	0.00	0.72	0.584	o					
2.15									
29.250	0.00	0.72	0.579	o					
2.14									
29.333	0.00	0.72	0.574	o					
2.12									
29.417	0.00	0.72	0.569	o					
2.11									
29.500	0.00	0.72	0.564	o					
2.09									
29.583	0.00	0.72	0.559	o					
2.07									
29.667	0.00	0.72	0.554	o					
2.06									
29.750	0.00	0.72	0.549	o					
2.04									
29.833	0.00	0.72	0.544	o					
2.03									
29.917	0.00	0.72	0.539	o					
2.01									
30.000	0.00	0.72	0.535	o					
1.99									
30.083	0.00	0.72	0.530	o					
1.98									
30.167	0.00	0.72	0.525	o					
1.96									
30.250	0.00	0.72	0.520	o					
1.94									
30.333	0.00	0.72	0.515	o					
1.92									
30.417	0.00	0.72	0.510	o					
1.91									
30.500	0.00	0.72	0.505	o					
1.89									
30.583	0.00	0.72	0.500	o					
1.87									
30.667	0.00	0.72	0.495	o					
1.85									
30.750	0.00	0.72	0.490	o					
1.84									
30.833	0.00	0.72	0.485	o					
1.82									
30.917	0.00	0.72	0.480	o					
1.80									
31.000	0.00	0.72	0.475	o					
1.78									
31.083	0.00	0.72	0.470	o					
1.77									
31.167	0.00	0.72	0.465	o					
1.75									
31.250	0.00	0.72	0.460	o					

1.73									
31.333	0.00	0.72	0.455	o					
1.71									
31.417	0.00	0.72	0.450	o					
1.70									
31.500	0.00	0.72	0.445	o					
1.68									
31.583	0.00	0.72	0.440	o					
1.66									
31.667	0.00	0.72	0.435	o					
1.64									
31.750	0.00	0.72	0.430	o					
1.63									
31.833	0.00	0.72	0.425	o					
1.61									
31.917	0.00	0.72	0.420	o					
1.59									
32.000	0.00	0.72	0.416	o					
1.57									
32.083	0.00	0.72	0.411	o					
1.56									
32.167	0.00	0.72	0.406	o					
1.54									
32.250	0.00	0.72	0.401	o					
1.52									
32.333	0.00	0.72	0.396	o					
1.50									
32.417	0.00	0.72	0.391	o					
1.49									
32.500	0.00	0.72	0.386	o					
1.47									
32.583	0.00	0.72	0.381	o					
1.45									
32.667	0.00	0.72	0.376	o					
1.43									
32.750	0.00	0.72	0.371	o					
1.42									
32.833	0.00	0.72	0.366	o					
1.40									
32.917	0.00	0.72	0.361	o					
1.38									
33.000	0.00	0.72	0.356	o					
1.36									
33.083	0.00	0.72	0.351	o					
1.35									
33.167	0.00	0.72	0.346	o					
1.33									
33.250	0.00	0.72	0.341	o					
1.31									
33.333	0.00	0.72	0.336	o					
1.29									
33.417	0.00	0.72	0.331	o					
1.28									
33.500	0.00	0.72	0.326	o					
1.26									
33.583	0.00	0.72	0.321	o					
1.24									
33.667	0.00	0.72	0.316	o					
1.22									
33.750	0.00	0.72	0.311	o					

1.21									
33.833	0.00	0.72	0.306	o					
1.19									
33.917	0.00	0.72	0.301	o					
1.17									
34.000	0.00	0.72	0.296	o					
1.15									
34.083	0.00	0.72	0.292	o					
1.14									
34.167	0.00	0.72	0.287	o					
1.12									
34.250	0.00	0.72	0.282	o					
1.10									
34.333	0.00	0.72	0.277	o					
1.08									
34.417	0.00	0.72	0.272	o					
1.07									
34.500	0.00	0.72	0.267	o					
1.05									
34.583	0.00	0.72	0.262	o					
1.03									
34.667	0.00	0.72	0.257	o					
1.01									
34.750	0.00	0.72	0.252	o					
1.00									
34.833	0.00	0.70	0.247	o					
0.98									
34.917	0.00	0.69	0.242	o					
0.96									
35.000	0.00	0.68	0.237	o					
0.94									
35.083	0.00	0.66	0.233	o					
0.92									
35.167	0.00	0.65	0.228	o					
0.90									
35.250	0.00	0.64	0.224	o					
0.89									
35.333	0.00	0.62	0.220	o					
0.87									
35.417	0.00	0.61	0.215	o					
0.85									
35.500	0.00	0.60	0.211	o					
0.83									
35.583	0.00	0.59	0.207	o					
0.82									
35.667	0.00	0.58	0.203	o					
0.80									
35.750	0.00	0.57	0.199	o					
0.79									
35.833	0.00	0.56	0.195	o					
0.77									
35.917	0.00	0.54	0.191	o					
0.76									
36.000	0.00	0.53	0.188	o					
0.74									
36.083	0.00	0.52	0.184	o					
0.73									
36.167	0.00	0.51	0.181	o					
0.71									
36.250	0.00	0.50	0.177	o					

0.70									
36.333	0.00	0.49	0.174	o					
0.69									
36.417	0.00	0.48	0.170	o					
0.67									
36.500	0.00	0.47	0.167	o					
0.66									
36.583	0.00	0.47	0.164	o					
0.65									
36.667	0.00	0.46	0.160	o					
0.63									
36.750	0.00	0.45	0.157	o					
0.62									
36.833	0.00	0.44	0.154	o					
0.61									
36.917	0.00	0.43	0.151	o					
0.60									
37.000	0.00	0.42	0.148	o					
0.59									
37.083	0.00	0.41	0.145	o					
0.58									
37.167	0.00	0.41	0.143	o					
0.56									
37.250	0.00	0.40	0.140	o					
0.55									
37.333	0.00	0.39	0.137	o					
0.54									
37.417	0.00	0.38	0.135	o					
0.53									
37.500	0.00	0.38	0.132	o					
0.52									
37.583	0.00	0.37	0.129	o					
0.51									
37.667	0.00	0.36	0.127	o					
0.50									
37.750	0.00	0.35	0.124	o					
0.49									
37.833	0.00	0.35	0.122	o					
0.48									
37.917	0.00	0.34	0.120	o					
0.47									
38.000	0.00	0.33	0.117	o					
0.46									
38.083	0.00	0.33	0.115	o					
0.45									
38.167	0.00	0.32	0.113	o					
0.45									
38.250	0.00	0.31	0.111	o					
0.44									
38.333	0.00	0.31	0.108	o					
0.43									
38.417	0.00	0.30	0.106	o					
0.42									
38.500	0.00	0.30	0.104	o					
0.41									
38.583	0.00	0.29	0.102	o					
0.40									
38.667	0.00	0.29	0.100	o					
0.40									
38.750	0.00	0.28	0.098	o					

0.39									
38.833	0.00	0.27	0.096	o					
0.38									
38.917	0.00	0.27	0.095	o					
0.37									
39.000	0.00	0.26	0.093	o					
0.37									
39.083	0.00	0.26	0.091	o					
0.36									
39.167	0.00	0.25	0.089	o					
0.35									
39.250	0.00	0.25	0.087	o					
0.35									
39.333	0.00	0.24	0.086	o					
0.34									
39.417	0.00	0.24	0.084	o					
0.33									
39.500	0.00	0.23	0.082	o					
0.33									
39.583	0.00	0.23	0.081	o					
0.32									
39.667	0.00	0.23	0.079	o					
0.31									
39.750	0.00	0.22	0.078	o					
0.31									
39.833	0.00	0.22	0.076	o					
0.30									
39.917	0.00	0.21	0.075	o					
0.30									
40.000	0.00	0.21	0.073	o					
0.29									
40.083	0.00	0.20	0.072	o					
0.28									
40.167	0.00	0.20	0.070	o					
0.28									
40.250	0.00	0.20	0.069	o					
0.27									
40.333	0.00	0.19	0.068	o					
0.27									
40.417	0.00	0.19	0.066	o					
0.26									
40.500	0.00	0.19	0.065	o					
0.26									
40.583	0.00	0.18	0.064	o					
0.25									
40.667	0.00	0.18	0.063	o					
0.25									
40.750	0.00	0.17	0.061	o					
0.24									
40.833	0.00	0.17	0.060	o					
0.24									
40.917	0.00	0.17	0.059	o					
0.23									
41.000	0.00	0.16	0.058	o					
0.23									
41.083	0.00	0.16	0.057	o					
0.22									
41.167	0.00	0.16	0.056	o					
0.22									
41.250	0.00	0.16	0.055	o					

0.22									
41.333	0.00	0.15	0.054	o					
0.21									
41.417	0.00	0.15	0.053	o					
0.21									
41.500	0.00	0.15	0.051	o					
0.20									
41.583	0.00	0.14	0.050	o					
0.20									
41.667	0.00	0.14	0.050	o					
0.20									
41.750	0.00	0.14	0.049	o					
0.19									
41.833	0.00	0.14	0.048	o					
0.19									
41.917	0.00	0.13	0.047	o					
0.18									
42.000	0.00	0.13	0.046	o					
0.18									
42.083	0.00	0.13	0.045	o					
0.18									
42.167	0.00	0.13	0.044	o					
0.17									
42.250	0.00	0.12	0.043	o					
0.17									
42.333	0.00	0.12	0.042	o					
0.17									
42.417	0.00	0.12	0.042	o					
0.16									
42.500	0.00	0.12	0.041	o					
0.16									
42.583	0.00	0.11	0.040	o					
0.16									
42.667	0.00	0.11	0.039	o					
0.15									
42.750	0.00	0.11	0.038	o					
0.15									
42.833	0.00	0.11	0.038	o					
0.15									
42.917	0.00	0.11	0.037	o					
0.15									
43.000	0.00	0.10	0.036	o					
0.14									
43.083	0.00	0.10	0.035	o					
0.14									
43.167	0.00	0.10	0.035	o					
0.14									
43.250	0.00	0.10	0.034	o					
0.13									
43.333	0.00	0.10	0.033	o					
0.13									
43.417	0.00	0.09	0.033	o					
0.13									
43.500	0.00	0.09	0.032	o					
0.13									
43.583	0.00	0.09	0.032	o					
0.12									
43.667	0.00	0.09	0.031	o					
0.12									
43.750	0.00	0.09	0.030	o					

0.12									
43.833	0.00	0.08	0.030	o					
0.12									
43.917	0.00	0.08	0.029	o					
0.12									
44.000	0.00	0.08	0.029	o					
0.11									
44.083	0.00	0.08	0.028	o					
0.11									
44.167	0.00	0.08	0.027	o					
0.11									
44.250	0.00	0.08	0.027	o					
0.11									
44.333	0.00	0.08	0.026	o					
0.10									
44.417	0.00	0.07	0.026	o					
0.10									
44.500	0.00	0.07	0.025	o					
0.10									
44.583	0.00	0.07	0.025	o					
0.10									
44.667	0.00	0.07	0.024	o					
0.10									
44.750	0.00	0.07	0.024	o					
0.09									
44.833	0.00	0.07	0.024	o					
0.09									
44.917	0.00	0.07	0.023	o					
0.09									
45.000	0.00	0.06	0.023	o					
0.09									
45.083	0.00	0.06	0.022	o					
0.09									
45.167	0.00	0.06	0.022	o					
0.09									
45.250	0.00	0.06	0.021	o					
0.08									
45.333	0.00	0.06	0.021	o					
0.08									
45.417	0.00	0.06	0.020	o					
0.08									
45.500	0.00	0.06	0.020	o					
0.08									
45.583	0.00	0.06	0.020	o					
0.08									
45.667	0.00	0.05	0.019	o					
0.08									
45.750	0.00	0.05	0.019	o					
0.07									
45.833	0.00	0.05	0.019	o					
0.07									
45.917	0.00	0.05	0.018	o					
0.07									
46.000	0.00	0.05	0.018	o					
0.07									
46.083	0.00	0.05	0.018	o					
0.07									
46.167	0.00	0.05	0.017	o					
0.07									
46.250	0.00	0.05	0.017	o					

0.07									
46.333	0.00	0.05	0.017	o					
0.07									
46.417	0.00	0.05	0.016	o					
0.06									
46.500	0.00	0.05	0.016	o					
0.06									
46.583	0.00	0.04	0.016	o					
0.06									
46.667	0.00	0.04	0.015	o					
0.06									
46.750	0.00	0.04	0.015	o					
0.06									
46.833	0.00	0.04	0.015	o					
0.06									
46.917	0.00	0.04	0.014	o					
0.06									
47.000	0.00	0.04	0.014	o					
0.06									
47.083	0.00	0.04	0.014	o					
0.05									
47.167	0.00	0.04	0.014	o					
0.05									
47.250	0.00	0.04	0.013	o					
0.05									
47.333	0.00	0.04	0.013	o					
0.05									
47.417	0.00	0.04	0.013	o					
0.05									
47.500	0.00	0.04	0.013	o					
0.05									
47.583	0.00	0.04	0.012	o					
0.05									
47.667	0.00	0.03	0.012	o					
0.05									
47.750	0.00	0.03	0.012	o					
0.05									
47.833	0.00	0.03	0.012	o					
0.05									
47.917	0.00	0.03	0.011	o					
0.04									
48.000	0.00	0.03	0.011	o					
0.04									
48.083	0.00	0.03	0.011	o					
0.04									
48.167	0.00	0.03	0.011	o					
0.04									
48.250	0.00	0.03	0.011	o					
0.04									
48.333	0.00	0.03	0.010	o					
0.04									
48.417	0.00	0.03	0.010	o					
0.04									
48.500	0.00	0.03	0.010	o					
0.04									
48.583	0.00	0.03	0.010	o					
0.04									
48.667	0.00	0.03	0.010	o					
0.04									
48.750	0.00	0.03	0.009	o					

0.04									
48.833	0.00	0.03	0.009	o					
0.04									
48.917	0.00	0.03	0.009	o					
0.04									
49.000	0.00	0.03	0.009	o					
0.03									
49.083	0.00	0.02	0.009	o					
0.03									
49.167	0.00	0.02	0.008	o					
0.03									
49.250	0.00	0.02	0.008	o					
0.03									
49.333	0.00	0.02	0.008	o					
0.03									
49.417	0.00	0.02	0.008	o					
0.03									
49.500	0.00	0.02	0.008	o					
0.03									
49.583	0.00	0.02	0.008	o					
0.03									
49.667	0.00	0.02	0.008	o					
0.03									
49.750	0.00	0.02	0.007	o					
0.03									
49.833	0.00	0.02	0.007	o					
0.03									
49.917	0.00	0.02	0.007	o					
0.03									
50.000	0.00	0.02	0.007	o					
0.03									
50.083	0.00	0.02	0.007	o					
0.03									
50.167	0.00	0.02	0.007	o					
0.03									
50.250	0.00	0.02	0.007	o					
0.03									
50.333	0.00	0.02	0.006	o					
0.03									
50.417	0.00	0.02	0.006	o					
0.02									
50.500	0.00	0.02	0.006	o					
0.02									
50.583	0.00	0.02	0.006	o					
0.02									
50.667	0.00	0.02	0.006	o					
0.02									
50.750	0.00	0.02	0.006	o					
0.02									
50.833	0.00	0.02	0.006	o					
0.02									
50.917	0.00	0.02	0.006	o					
0.02									
51.000	0.00	0.02	0.006	o					
0.02									
51.083	0.00	0.02	0.005	o					
0.02									
51.167	0.00	0.02	0.005	o					
0.02									
51.250	0.00	0.01	0.005	o					

0.02									
51.333	0.00	0.01	0.005	o					
0.02									
51.417	0.00	0.01	0.005	o					
0.02									
51.500	0.00	0.01	0.005	o					
0.02									
51.583	0.00	0.01	0.005	o					
0.02									
51.667	0.00	0.01	0.005	o					
0.02									
51.750	0.00	0.01	0.005	o					
0.02									
51.833	0.00	0.01	0.005	o					
0.02									
51.917	0.00	0.01	0.004	o					
0.02									
52.000	0.00	0.01	0.004	o					
0.02									
52.083	0.00	0.01	0.004	o					
0.02									
52.167	0.00	0.01	0.004	o					
0.02									
52.250	0.00	0.01	0.004	o					
0.02									
52.333	0.00	0.01	0.004	o					
0.02									
52.417	0.00	0.01	0.004	o					
0.02									
52.500	0.00	0.01	0.004	o					
0.02									
52.583	0.00	0.01	0.004	o					
0.02									
52.667	0.00	0.01	0.004	o					
0.01									
52.750	0.00	0.01	0.004	o					
0.01									
52.833	0.00	0.01	0.004	o					
0.01									
52.917	0.00	0.01	0.004	o					
0.01									
53.000	0.00	0.01	0.003	o					
0.01									
53.083	0.00	0.01	0.003	o					
0.01									
53.167	0.00	0.01	0.003	o					
0.01									
53.250	0.00	0.01	0.003	o					
0.01									
53.333	0.00	0.01	0.003	o					
0.01									
53.417	0.00	0.01	0.003	o					
0.01									
53.500	0.00	0.01	0.003	o					
0.01									
53.583	0.00	0.01	0.003	o					
0.01									
53.667	0.00	0.01	0.003	o					
0.01									
53.750	0.00	0.01	0.003	o					

0.01									
53.833	0.00	0.01	0.003	o					
0.01									
53.917	0.00	0.01	0.003	o					
0.01									
54.000	0.00	0.01	0.003	o					
0.01									
54.083	0.00	0.01	0.003	o					
0.01									
54.167	0.00	0.01	0.003	o					
0.01									
54.250	0.00	0.01	0.003	o					
0.01									
54.333	0.00	0.01	0.003	o					
0.01									
54.417	0.00	0.01	0.002	o					
0.01									
54.500	0.00	0.01	0.002	o					
0.01									
54.583	0.00	0.01	0.002	o					
0.01									
54.667	0.00	0.01	0.002	o					
0.01									
54.750	0.00	0.01	0.002	o					
0.01									
54.833	0.00	0.01	0.002	o					
0.01									
54.917	0.00	0.01	0.002	o					
0.01									
55.000	0.00	0.01	0.002	o					
0.01									
55.083	0.00	0.01	0.002	o					
0.01									
55.167	0.00	0.01	0.002	o					
0.01									
55.250	0.00	0.01	0.002	o					
0.01									
55.333	0.00	0.01	0.002	o					
0.01									
55.417	0.00	0.01	0.002	o					
0.01									
55.500	0.00	0.01	0.002	o					
0.01									
55.583	0.00	0.01	0.002	o					
0.01									
55.667	0.00	0.01	0.002	o					
0.01									
55.750	0.00	0.01	0.002	o					
0.01									
55.833	0.00	0.01	0.002	o					
0.01									
55.917	0.00	0.00	0.002	o					
0.01									
56.000	0.00	0.00	0.002	o					
0.01									
56.083	0.00	0.00	0.002	o					
0.01									
56.167	0.00	0.00	0.002	o					
0.01									
56.250	0.00	0.00	0.002	o					

0.01									
56.333	0.00	0.00	0.002	o					
0.01									
56.417	0.00	0.00	0.002	o					
0.01									
56.500	0.00	0.00	0.002	o					
0.01									
56.583	0.00	0.00	0.001	o					
0.01									
56.667	0.00	0.00	0.001	o					
0.01									
56.750	0.00	0.00	0.001	o					
0.01									
56.833	0.00	0.00	0.001	o					
0.01									
56.917	0.00	0.00	0.001	o					
0.01									
57.000	0.00	0.00	0.001	o					
0.01									
57.083	0.00	0.00	0.001	o					
0.01									
57.167	0.00	0.00	0.001	o					
0.01									
57.250	0.00	0.00	0.001	o					
0.01									
57.333	0.00	0.00	0.001	o					
0.00									
57.417	0.00	0.00	0.001	o					
0.00									
57.500	0.00	0.00	0.001	o					
0.00									
57.583	0.00	0.00	0.001	o					
0.00									
57.667	0.00	0.00	0.001	o					
0.00									
57.750	0.00	0.00	0.001	o					
0.00									
57.833	0.00	0.00	0.001	o					
0.00									
57.917	0.00	0.00	0.001	o					
0.00									
58.000	0.00	0.00	0.001	o					
0.00									
58.083	0.00	0.00	0.001	o					
0.00									
58.167	0.00	0.00	0.001	o					
0.00									
58.250	0.00	0.00	0.001	o					
0.00									
58.333	0.00	0.00	0.001	o					
0.00									
58.417	0.00	0.00	0.001	o					
0.00									
58.500	0.00	0.00	0.001	o					
0.00									
58.583	0.00	0.00	0.001	o					
0.00									
58.667	0.00	0.00	0.001	o					
0.00									
58.750	0.00	0.00	0.001	o					

0.00									
58.833	0.00	0.00	0.001	o					
0.00									
58.917	0.00	0.00	0.001	o					
0.00									
59.000	0.00	0.00	0.001	o					
0.00									
59.083	0.00	0.00	0.001	o					
0.00									
59.167	0.00	0.00	0.001	o					
0.00									
59.250	0.00	0.00	0.001	o					
0.00									
59.333	0.00	0.00	0.001	o					
0.00									
59.417	0.00	0.00	0.001	o					
0.00									
59.500	0.00	0.00	0.001	o					
0.00									
59.583	0.00	0.00	0.001	o					
0.00									
59.667	0.00	0.00	0.001	o					
0.00									
59.750	0.00	0.00	0.001	o					
0.00									
59.833	0.00	0.00	0.001	o					
0.00									
59.917	0.00	0.00	0.001	o					
0.00									
60.000	0.00	0.00	0.001	o					
0.00									
60.083	0.00	0.00	0.001	o					
0.00									
60.167	0.00	0.00	0.001	o					
0.00									
60.250	0.00	0.00	0.001	o					
0.00									
60.333	0.00	0.00	0.001	o					
0.00									
60.417	0.00	0.00	0.001	o					
0.00									
60.500	0.00	0.00	0.001	o					
0.00									
60.583	0.00	0.00	0.001	o					
0.00									
60.667	0.00	0.00	0.001	o					
0.00									
60.750	0.00	0.00	0.001	o					
0.00									
60.833	0.00	0.00	0.001	o					
0.00									
60.917	0.00	0.00	0.001	o					
0.00									
61.000	0.00	0.00	0.001	o					
0.00									
61.083	0.00	0.00	0.001	o					
0.00									
61.167	0.00	0.00	0.001	o					
0.00									
61.250	0.00	0.00	0.000	o					

0.00									
61.333	0.00	0.00	0.000	o					
0.00									
61.417	0.00	0.00	0.000	o					
0.00									
61.500	0.00	0.00	0.000	o					
0.00									
61.583	0.00	0.00	0.000	o					
0.00									
61.667	0.00	0.00	0.000	o					
0.00									
61.750	0.00	0.00	0.000	o					
0.00									
61.833	0.00	0.00	0.000	o					
0.00									
61.917	0.00	0.00	0.000	o					
0.00									
62.000	0.00	0.00	0.000	o					
0.00									
62.083	0.00	0.00	0.000	o					
0.00									
62.167	0.00	0.00	0.000	o					
0.00									
62.250	0.00	0.00	0.000	o					
0.00									
62.333	0.00	0.00	0.000	o					
0.00									
62.417	0.00	0.00	0.000	o					
0.00									
62.500	0.00	0.00	0.000	o					
0.00									
62.583	0.00	0.00	0.000	o					
0.00									
62.667	0.00	0.00	0.000	o					
0.00									
62.750	0.00	0.00	0.000	o					
0.00									

\*\*\*\*\*HYDROGRAPH

DATA\*\*\*\*\*

Number of intervals = 753  
Time interval = 5.0 (Min.)  
Maximum/Peak flow rate = 13.054 (CFS)  
Total volume = 3.548 (Ac.Ft)

Status of hydrographs being held in storage

	Stream 1	Stream 2	Stream 3	Stream 4	Stream 5
Peak (CFS)	0.000	0.000	0.000	0.000	
Vol (Ac.Ft)	0.000	0.000	0.000	0.000	

\*\*\*\*\*  
\*\*\*\*\*

-----  
--

# **APPENDIX C: PROJECT HYDRAULIC CALCULATIONS**

# Weir Report

## Pena Outlet - Prelim Design - Parkway Drain - 6ft 4in opening

### Rectangular Weir


Crest = Sharp  
Bottom Length (ft) = 6.33  
Total Depth (ft) = 0.75

### Highlighted

Depth (ft) = 0.75  
Q (cfs) = 13.69  
Area (sqft) = 4.75  
Velocity (ft/s) = 2.88  
Top Width (ft) = 6.33

### Calculations

Weir Coeff. Cw = 3.33  
Compute by: Q vs Depth  
No. Increments = 10

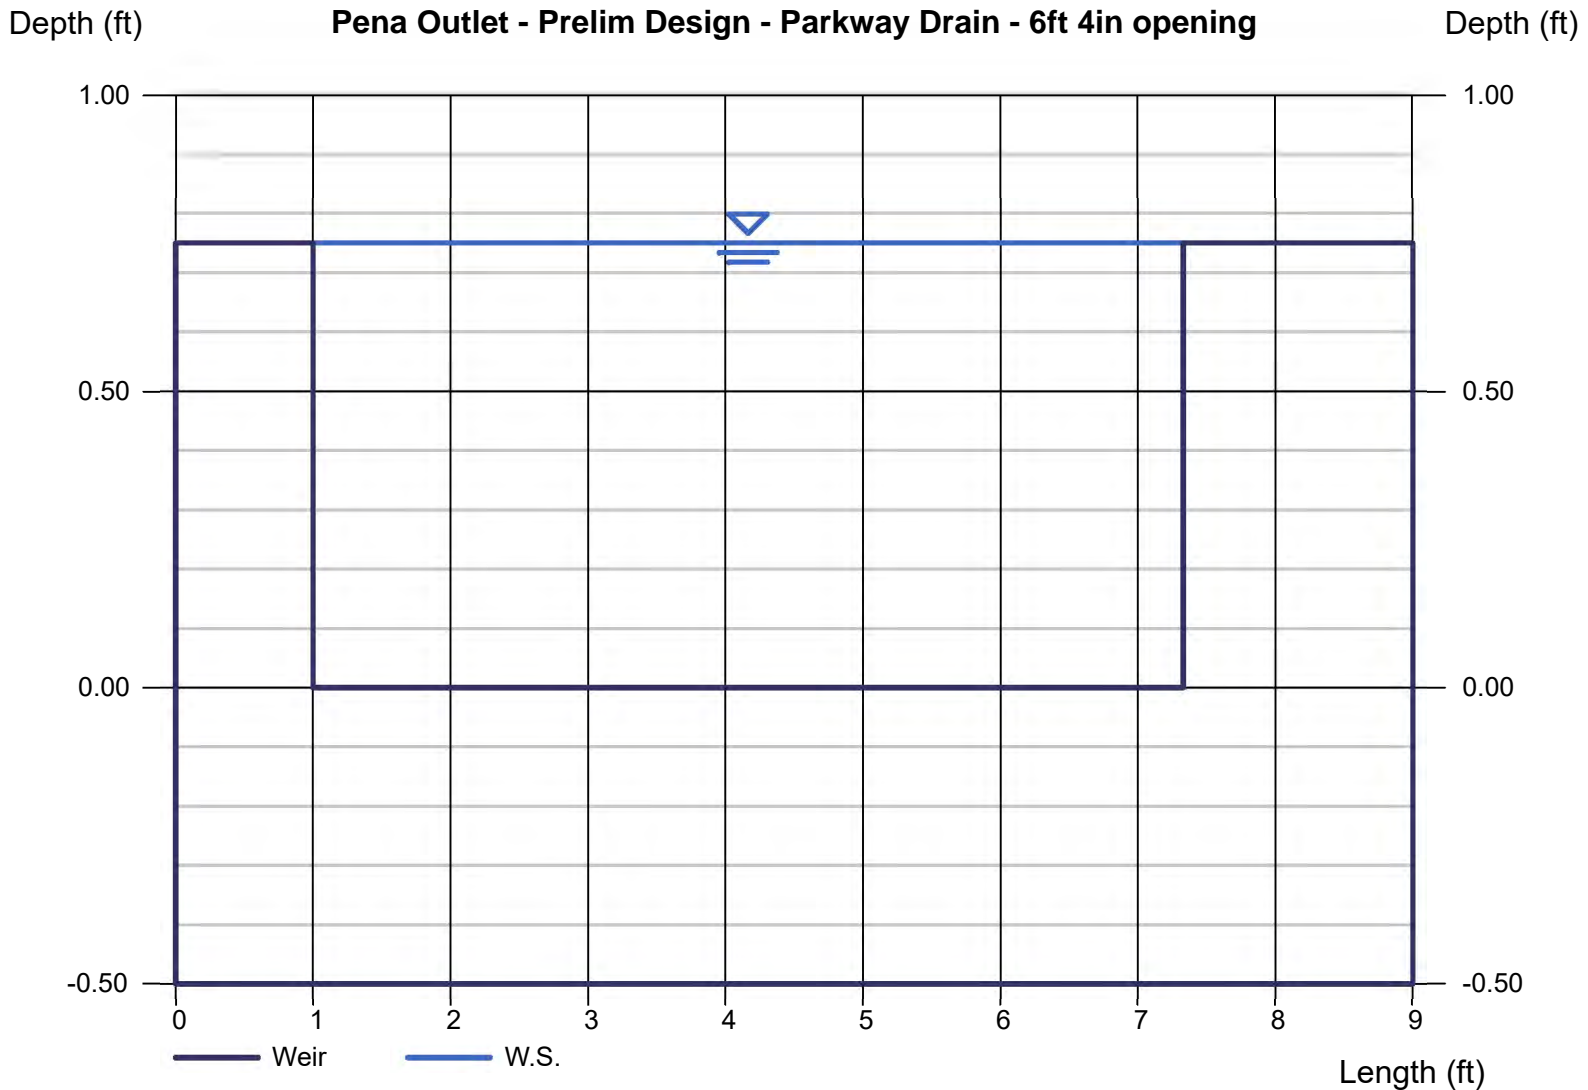

# Channel Report

## Street Capacity 0.5% BC to BC - 10 year

### User-defined

Invert Elev (ft) = 0.30  
Slope (%) = 0.50  
N-Value = 0.015

### Highlighted


Depth (ft) = 0.50  
Q (cfs) = 37.13  
Area (sqft) = 12.00  
Velocity (ft/s) = 3.09  
Wetted Perim (ft) = 41.00  
Crit Depth, Yc (ft) = 0.50  
Top Width (ft) = 40.01  
EGL (ft) = 0.65

### Calculations

Compute by: Known Depth  
Known Depth (ft) = 0.50

### (Sta, El, n)-(Sta, El, n)...

(0.00, 1.00)-(10.00, 0.80, 0.035)-(10.01, 0.30, 0.015)-(30.00, 0.70, 0.015)-(50.00, 0.30, 0.015)-(50.01, 0.80, 0.015)-(60.00, 1.00, 0.035)

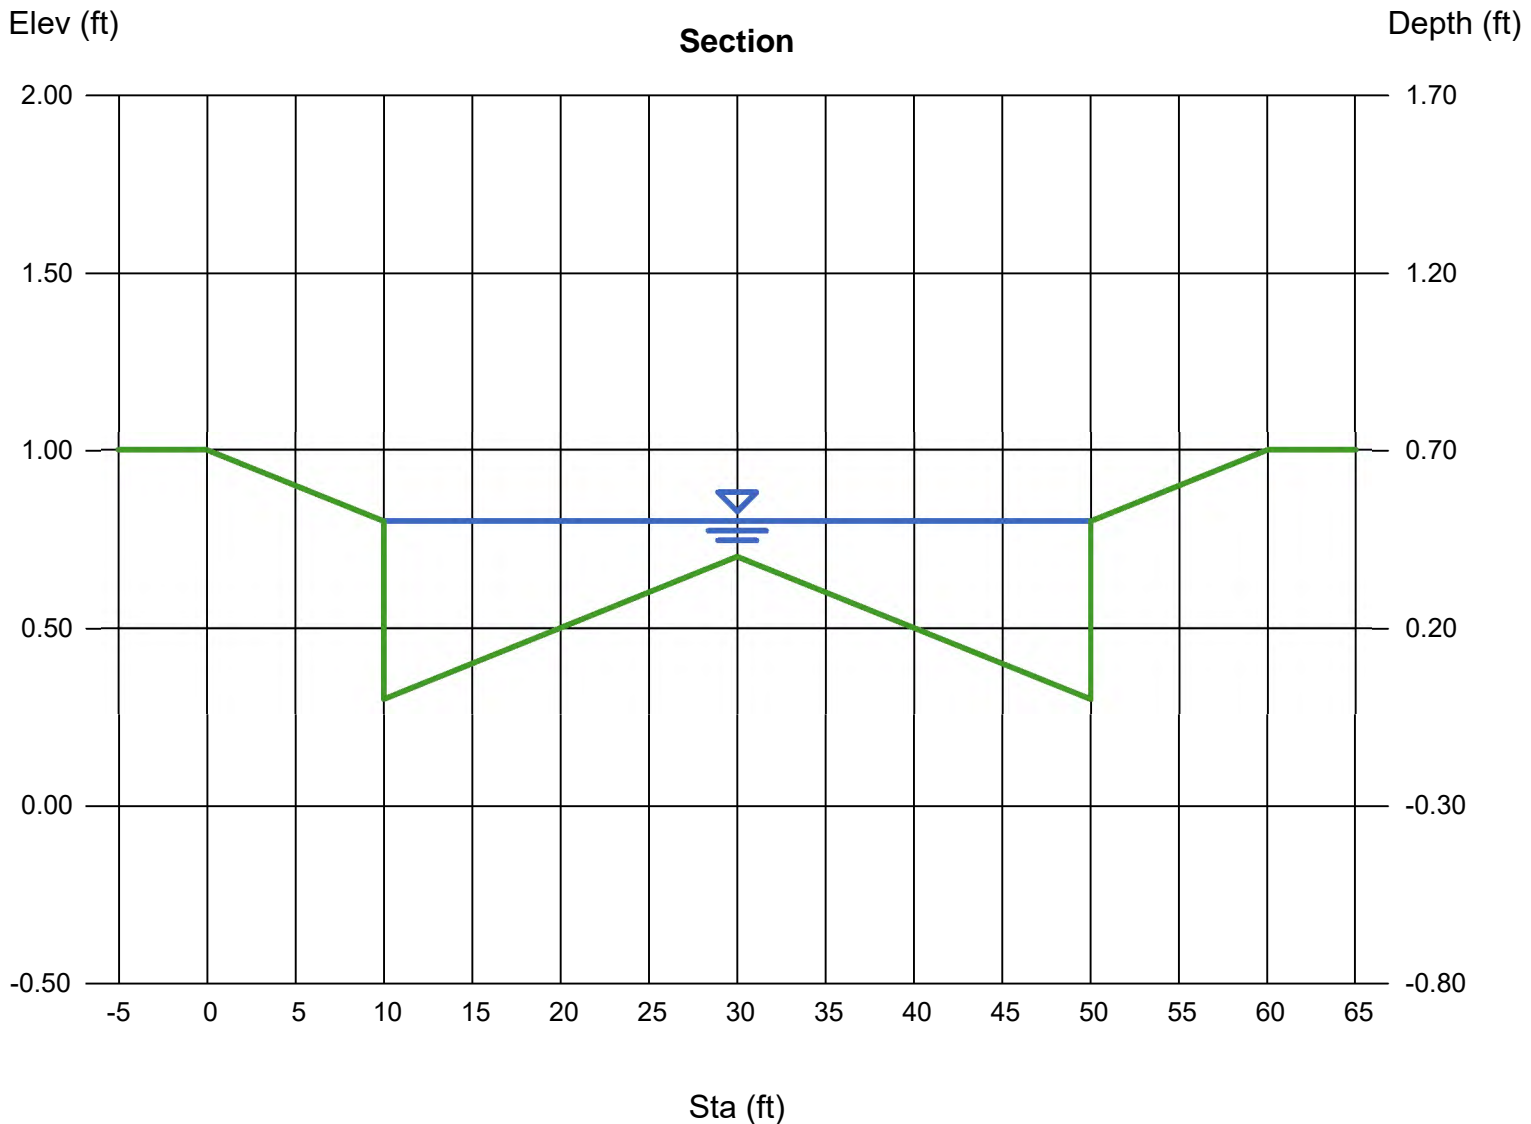

# Channel Report

## Street Capacity 0.5% ROW to ROW - 100 year

### User-defined

Invert Elev (ft) = 0.30  
Slope (%) = 0.50  
N-Value = Composite

### Highlighted

Depth (ft) = 0.70  
Q (cfs) = 52.09  
Area (sqft) = 22.00  
Velocity (ft/s) = 2.37  
Wetted Perim (ft) = 60.99  
Crit Depth, Yc (ft) = 0.01  
Top Width (ft) = 60.00  
EGL (ft) = 0.79

### Calculations

Compute by: Q vs Depth  
No. Increments = 1

### (Sta, El, n)-(Sta, El, n)...

(0.00, 1.00)-(10.00, 0.80, 0.035)-(10.01, 0.30, 0.015)-(30.00, 0.70, 0.015)-(50.00, 0.30, 0.015)-(50.01, 0.80, 0.015)-(60.00, 1.00, 0.035)

